




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**CATERPILLAR D5KLG 001724 (S/N YYY01518)**  
 Component  
**Diesel Engine**  
 Fluid  
**CASTROL VECTON 15W40 CK4 (2 GAL)**

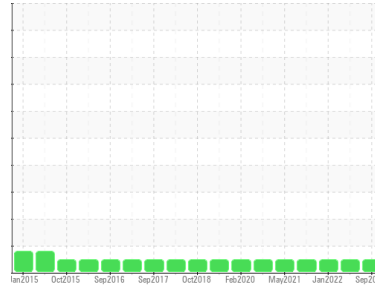

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0823899</b>	WC0758030	WC0557510
Sample Date	Client Info		<b>14 Sep 2023</b>	03 Apr 2023	06 Jan 2022
Machine Age	hrs	Client Info	<b>9477</b>	8973	7657
Oil Age	hrs	Client Info	<b>504</b>	500	500
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>86</b>	95	41
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>15</b>	11	4
Lead	ppm	ASTM D5185m >40	<b>3</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>12</b>	7	2
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>61</b>	73	25
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>98</b>	103	84
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	<b>136</b>	122	163
Calcium	ppm	ASTM D5185m	<b>2338</b>	2522	2043
Phosphorus	ppm	ASTM D5185m	<b>1069</b>	1182	908
Zinc	ppm	ASTM D5185m	<b>1335</b>	1542	1085
Sulfur	ppm	ASTM D5185m	<b>3602</b>	4203	3073

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>14</b>	13	9
Sodium	ppm	ASTM D5185m	<b>3</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.2</b>	1.2	2.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>14.5</b>	15.0	12.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>30.4</b>	30.8	26

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>30.9</b>	31.6	18.7
Base Number (BN)	mg KOH/g	ASTM D2896 10	<b>6.3</b>	5.9	5.8







# OIL ANALYSIS REPORT

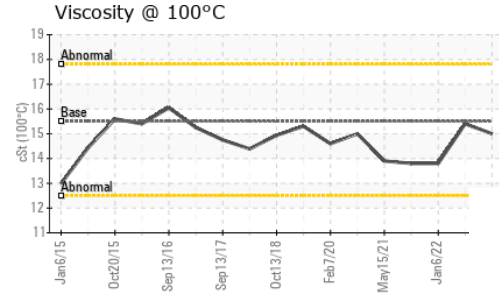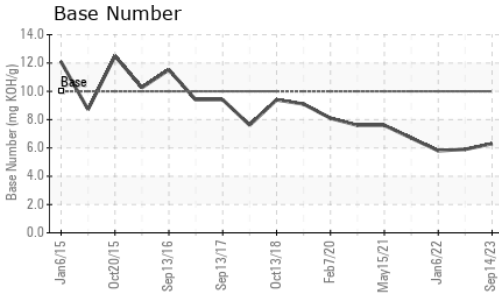

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	<b>15.0</b>	15.4	13.8

### GRAPHS

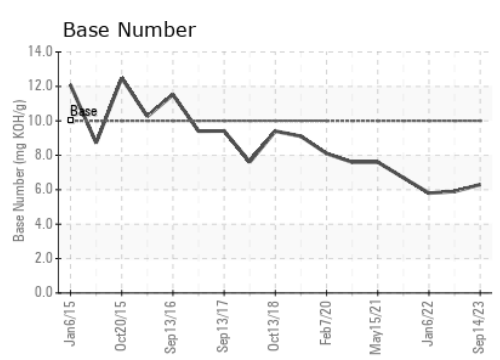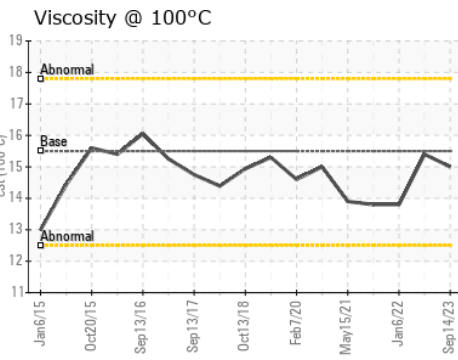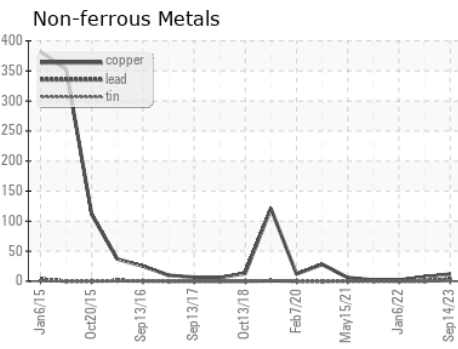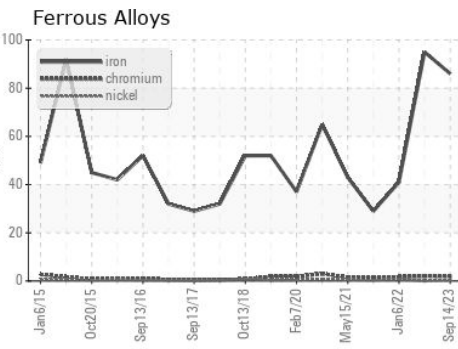

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0823899 **Received** : 29 Sep 2023  
**Lab Number** : **05964956** **Diagnosed** : 01 Oct 2023  
**Unique Number** : 10671507 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**CJ MILLER LLC**  
 2903 DEDE RD  
 FINKSBURG, MD  
 US 21048  
 Contact: JOE ROSS  
 jross@cjmillerllc.com  
 T: (410)239-8006  
 F: (410)239-1051

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)