


OIL ANALYSIS REPORT

CHEATHAM ANNEX 1BHT CRANE 1B (S/N 62510225)

Hydraulic System

MOBIL DTE 10 EXCEL 68 (680 LTR)



Sample Rating Trend



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORMATION	0.4.4.54.5		al2014 P8020	115 Mar2016 Apr2018		Apr2022	
Sample Date	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Machine Age yrs Client Info 0 0 0 0 0 0 0 0 0	Sample Number		Client Info		WC0752659	WC0752680	WC0513650
Oil Age yrs Client Info N/A	Sample Date		Client Info		28 Sep 2023	22 Jan 2023	24 Apr 2022
Oil Changed Sample Status Client Info N/A Part Part Part Part Part Part Part D5165m 20 0 1 </th <th>Machine Age</th> <th>yrs</th> <th>Client Info</th> <th></th> <th>0</th> <th>0</th> <th>0</th>	Machine Age	yrs	Client Info		0	0	0
NORMAL NORMAL NORMAL NORMAL WEAR METALS method limit/base current history1 history2	Oil Age	yrs	Client Info		0	0	0
WEAR METALS method limit/base current history1 history2 Iron ppm ASTM D5185m >20 0 <1 <1 Chromium ppm ASTM D5185m >20 0 0 0 Nickel ppm ASTM D5185m >20 0 <1 0 Titanium ppm ASTM D5185m 0 0 <1 <1 Aluminum ppm ASTM D5185m >20 <1 <1 <1 <1 Lead ppm ASTM D5185m >20 2 0	Oil Changed		Client Info		N/A	N/A	N/A
Iron	Sample Status				NORMAL	NORMAL	NORMAL
Chromium	WEAR METALS		method	limit/base	current	history1	history2
Nickel ppm ASTM D5185m >20 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Iron	ppm	ASTM D5185m	>20	0	<1	<1
Titanium Ppm ASTM D5185m O	Chromium	ppm	ASTM D5185m	>20	0	0	0
Silver ppm ASTM D5185m 0 0 <1 Aluminum ppm ASTM D5185m >20 <1 <1 <1 Lead ppm ASTM D5185m >20 2 4 2 Copper ppm ASTM D5185m >20 0 <1 <1 Tin ppm ASTM D5185m 20 0 <1 <1 Antimony ppm ASTM D5185m 0 0 0 0 Vanadium ppm ASTM D5185m 0 0 0 0 Cadmium ppm ASTM D5185m 0 0 0 2 Boron ppm ASTM D5185m 0 2 0 Barium ppm ASTM D5185m 0 <1 0 Magnesium ppm ASTM D5185m 0 <1 <1 Magnesium ppm ASTM D5185m 103 109 111 Phosphorus ppm ASTM D51	Nickel	ppm	ASTM D5185m	>20	0	<1	0
Aluminum	Titanium	ppm	ASTM D5185m		0	0	0
Lead	Silver	ppm	ASTM D5185m		0	0	<1
Copper ppm ASTM D5185m >20 2 2 2 2 Tin ppm ASTM D5185m >20 0 <1	Aluminum	ppm	ASTM D5185m	>20	<1	<1	<1
Tin ppm ASTM D5185m >20 0 <1 <1 Antimony ppm ASTM D5185m —— —— —— Vanadium ppm ASTM D5185m 0 0 0 Cadmium ppm ASTM D5185m 0 0 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185m 0 0 2 0 Barium ppm ASTM D5185m 0 <1	Lead	ppm	ASTM D5185m	>20	2	4	2
Tin ppm ASTM D5185m >20 0 <1 <1 <1	Copper	ppm	ASTM D5185m	>20	2	2	2
Vanadium ppm ASTM D5185m 0 0 0 Cadmium ppm ASTM D5185m 0 0 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185m 0 0 2 Barium ppm ASTM D5185m 0 2 0 Molybdenum ppm ASTM D5185m 0 <1 0 Manganese ppm ASTM D5185m 0 <1 <1 Magnesium ppm ASTM D5185m 4 3 2 Calcium ppm ASTM D5185m 103 109 111 Phosphorus ppm ASTM D5185m 440 474 472 Zinc ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4		ppm	ASTM D5185m	>20	0	<1	<1
Cadmium ppm ASTM D5185m 0 0 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185m 0 0 2 Barium ppm ASTM D5185m 0 2 0 Molybdenum ppm ASTM D5185m 0 <1	Antimony	ppm	ASTM D5185m				
Cadmium ppm ASTM D5185m 0 0 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185m 0 0 2 Barium ppm ASTM D5185m 0 2 0 Molybdenum ppm ASTM D5185m 0 <1	Vanadium	ppm	ASTM D5185m		0	0	0
Boron ppm ASTM D5185m 0 2 Barium ppm ASTM D5185m 0 2 Molybdenum ppm ASTM D5185m 0 <1 0 Manganese ppm ASTM D5185m 0 <1 <1 Magnesium ppm ASTM D5185m 4 3 2 Calcium ppm ASTM D5185m 103 109 111 Phosphorus ppm ASTM D5185m 440 474 472 Zinc ppm ASTM D5185m 60 77 63 Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m >20 0 <1 0 FLUID CLEANLINESS method limit/base current history1 history2 </td <td>Cadmium</td> <td></td> <td>ASTM D5185m</td> <td></td> <th>0</th> <td>0</td> <td>0</td>	Cadmium		ASTM D5185m		0	0	0
Barium ppm ASTM D5185m 0 2 0 Molybdenum ppm ASTM D5185m 0 <1 0 Manganese ppm ASTM D5185m 0 <1 <1 Magnesium ppm ASTM D5185m 4 3 2 Calcium ppm ASTM D5185m 103 109 111 Phosphorus ppm ASTM D5185m 440 474 472 Zinc ppm ASTM D5185m 60 77 63 Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m >1 2 1 Potassium ppm ASTM D5185m >20 0 <1 0 FLUID CLEANLINESS method	ADDITIVES		method	limit/base	current	history1	history2
Barium ppm ASTM D5185m 0 2 0 Molybdenum ppm ASTM D5185m 0 <1	Boron	ppm	ASTM D5185m		0	0	2
Molybdenum ppm ASTM D5185m 0 <1 0 Manganese ppm ASTM D5185m 0 <1 <1 Magnesium ppm ASTM D5185m 4 3 2 Calcium ppm ASTM D5185m 103 109 111 Phosphorus ppm ASTM D5185m 440 474 472 Zinc ppm ASTM D5185m 60 77 63 Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m >20 0 <1 0 FLUID CLEANLINESS method limit/base current history1 history2 Particles >4μm ASTM D7647 >5000 347 422 198 Particles >21μm ASTM D7647 >	Barium		ASTM D5185m		0	2	0
Manganese ppm ASTM D5185m 0 <1 <1 Magnesium ppm ASTM D5185m 4 3 2 Calcium ppm ASTM D5185m 103 109 111 Phosphorus ppm ASTM D5185m 440 474 472 Zinc ppm ASTM D5185m 60 77 63 Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m 1 2 1 0 FLUID CLEANLINESS method limit/base current history1 history2 Particles >4μm ASTM D7647 >5000 347 422 198 Particles >6μm ASTM D7647 >160 11 10 3 <td< td=""><td>Molybdenum</td><td></td><td></td><td></td><th>0</th><td><1</td><td>0</td></td<>	Molybdenum				0	<1	0
Magnesium ppm ASTM D5185m 4 3 2 Calcium ppm ASTM D5185m 103 109 111 Phosphorus ppm ASTM D5185m 440 474 472 Zinc ppm ASTM D5185m 60 77 63 Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m >15 4 4 4 Potassium ppm ASTM D5185m >20 0 <1 0 FLUID CLEANLINESS method limit/base current history1 history2 Particles >4µm ASTM D7647 >5000 347 422 198 Particles >21µm	-		ASTM D5185m		0	<1	<1
Calcium ppm ASTM D5185m 103 109 111 Phosphorus ppm ASTM D5185m 440 474 472 Zinc ppm ASTM D5185m 60 77 63 Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m >1 2 1 Potassium ppm ASTM D5185m >20 0 <1	•		ASTM D5185m		4	3	2
Phosphorus ppm ASTM D5185m 440 474 472 Zinc ppm ASTM D5185m 60 77 63 Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m 1 2 1 1 Potassium ppm ASTM D5185m >20 0 <1	-		ASTM D5185m		103		111
Zinc ppm ASTM D5185m 60 77 63 Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m 1 2 1 2 1 Potassium ppm ASTM D5185m >20 0 <1 0 FLUID CLEANLINESS method limit/base current history1 history2 Particles >4μm ASTM D7647 >5000 347 422 198 Particles >6μm ASTM D7647 >1300 103 104 34 Particles >14μm ASTM D7647 >160 11 10 3 Particles >21μm ASTM D7647 >40 3 3 1 Particles >71μm ASTM D7647 >3 0 0 0 <td< td=""><td></td><td></td><td></td><td></td><th></th><td></td><td></td></td<>							
Sulfur ppm ASTM D5185m 2105 2700 1950 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m >1 2 1 Potassium ppm ASTM D5185m >20 0 <1					-		
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m >20 0 <1							
Silicon ppm ASTM D5185m >15 4 4 4 Sodium ppm ASTM D5185m 1 2 1 Potassium ppm ASTM D5185m >20 0 <1	CONTAMINANTS		method	limit/base	current	history1	history2
Sodium ppm ASTM D5185m 1 2 1 Potassium ppm ASTM D5185m >20 0 <1							•
Potassium ppm ASTM D5185m >20 0 <1	Sodium		ASTM D5185m		1	2	1
Particles >4μm ASTM D7647 >5000 347 422 198 Particles >6μm ASTM D7647 >1300 103 104 34 Particles >14μm ASTM D7647 >160 11 10 3 Particles >21μm ASTM D7647 >40 3 3 1 Particles >38μm ASTM D7647 >10 0 0 0 Particles >71μm ASTM D7647 >3 0 0 0 Oil Cleanliness ISO 4406 (c) >19/17/14 16/14/11 16/14/10 15/12/9 FLUID DEGRADATION method limit/base current history1 history2				>20	0	<1	0
Particles >6μm ASTM D7647 >1300 103 104 34 Particles >14μm ASTM D7647 >160 11 10 3 Particles >21μm ASTM D7647 >40 3 3 1 Particles >38μm ASTM D7647 >10 0 0 0 Particles >71μm ASTM D7647 >3 0 0 0 Oil Cleanliness ISO 4406 (c) >19/17/14 16/14/11 16/14/10 15/12/9 FLUID DEGRADATION method limit/base current history1 history2	FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >6μm ASTM D7647 >1300 103 104 34 Particles >14μm ASTM D7647 >160 11 10 3 Particles >21μm ASTM D7647 >40 3 3 1 Particles >38μm ASTM D7647 >10 0 0 0 Particles >71μm ASTM D7647 >3 0 0 0 Oil Cleanliness ISO 4406 (c) >19/17/14 16/14/11 16/14/10 15/12/9 FLUID DEGRADATION method limit/base current history1 history2	Particles >4µm		ASTM D7647	>5000	347	422	198
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	•		ASTM D7647	>1300	103	104	34
Particles >21μm ASTM D7647 >40 3 3 1 Particles >38μm ASTM D7647 >10 0 0 0 Particles >71μm ASTM D7647 >3 0 0 0 Oil Cleanliness ISO 4406 (c) >19/17/14 16/14/11 16/14/10 15/12/9 FLUID DEGRADATION method limit/base current history1 history2	•		ASTM D7647	>160			3
Particles >38μm ASTM D7647 >10 0 0 0 Particles >71μm ASTM D7647 >3 0 0 0 Oil Cleanliness ISO 4406 (c) >19/17/14 16/14/11 16/14/10 15/12/9 FLUID DEGRADATION method limit/base current history1 history2			ASTM D7647		3		
Particles >71μm ASTM D7647 >3 0 0 0 Oil Cleanliness ISO 4406 (c) >19/17/14 16/14/11 16/14/10 15/12/9 FLUID DEGRADATION method limit/base current history1 history2	•						0
Oil Cleanliness ISO 4406 (c) >19/17/14 16/14/11 16/14/10 15/12/9 FLUID DEGRADATION method limit/base current history1 history2	•						
	•						
	FLUID DEGRADA	NOITA	method	limit/base	current	history1	history2
					0.092		





OIL ANALYSIS REPORT

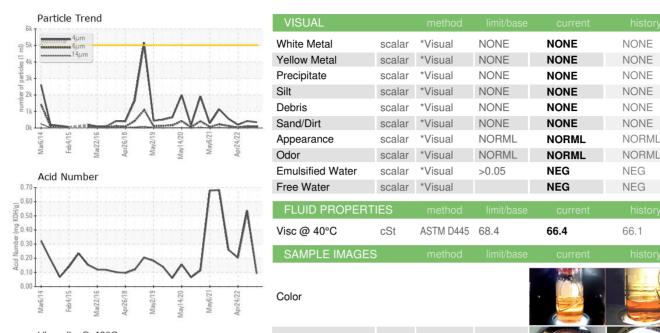

Bottom

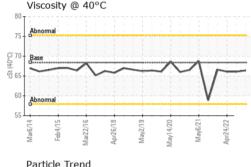



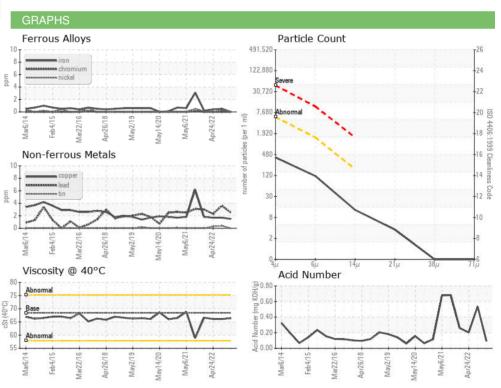





Certificate L2367

Laboratory Sample No. Lab Number Test Package

Unique Number : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0752659 : 05965343

Received : 10671894

Diagnosed Diagnostician

: 29 Sep 2023 : 02 Oct 2023 : Don Baldridge **CARGOTEC MARINE - MACGREGOR** 525 BYRON ST, SUITE B

CHESAPEAKE, VA US 23320

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

66.1

Contact: TARMO MAGI tarmo.magi@macgregor.com

T: (757)558-4584 F: (757)558-4581

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: CARPORMAC [WUSCAR] 05965343 (Generated: 10/02/2023 13:59:16) Rev: 1

Submitted By: TARMO MAGI