




# OIL ANALYSIS REPORT

Sample Rating Trend

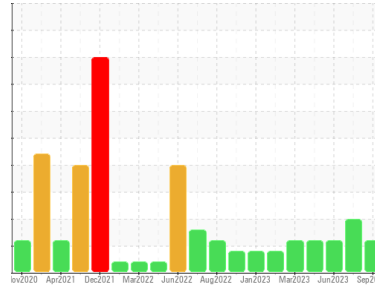

## VISCOSITY



Area  
**RIG 6**  
 Machine Id  
**R6-P-01G**  
 Component  
**Gearbox**  
 Fluid  
**GEAR OIL ISO 320 (--- GAL)**

### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

#### Fluid Condition

The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0012958</b>	KL0012707	KL0012522
Sample Date	Client Info		<b>13 Sep 2023</b>	28 Jul 2023	24 Jun 2023
Machine Age	days	Client Info	<b>45180</b>	45134	45099
Oil Age	days	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>2</b>	7	13
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m >50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >200	<b>3</b>	3	3
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>2</b>	2	16
Barium	ppm	ASTM D5185m 15	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 15	<b>2</b>	0	3
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 50	<b>11</b>	4	0
Calcium	ppm	ASTM D5185m 50	<b>16</b>	14	22
Phosphorus	ppm	ASTM D5185m 350	<b>185</b>	233	256
Zinc	ppm	ASTM D5185m 100	<b>3</b>	0	3
Sulfur	ppm	ASTM D5185m 12500	<b>7396</b>	9714	10167

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>5</b>	7	9
Sodium	ppm	ASTM D5185m	<b>13</b>	10	14
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	3

### FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>97745</b>	157249	168979
Particles >6µm	ASTM D7647	>5000	▲ <b>18463</b>	▲ 41713	▲ 33629
Particles >14µm	ASTM D7647	>640	<b>126</b>	▲ 1166	256
Particles >21µm	ASTM D7647	>160	<b>13</b>	▲ 269	26
Particles >38µm	ASTM D7647	>40	<b>0</b>	4	0
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ <b>21/14</b>	▲ 23/17	▲ 22/15


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.85	<b>0.50</b>	0.50	0.60




# OIL ANALYSIS REPORT


## ▲ Particle Trend

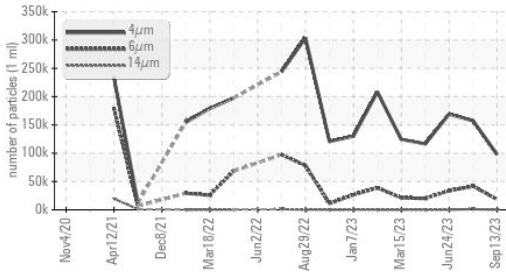


## ▲ Particle Trend

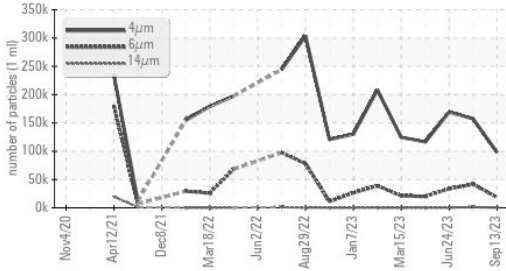

## ▲ Viscosity @ 40°C

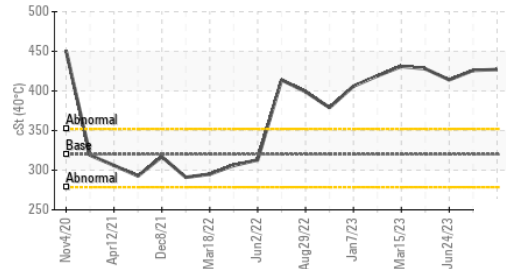


## Acid Number

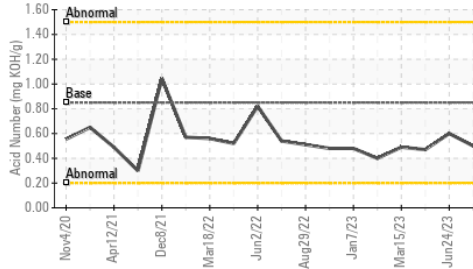

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 320	▲ 427	▲ 426	▲ 414

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

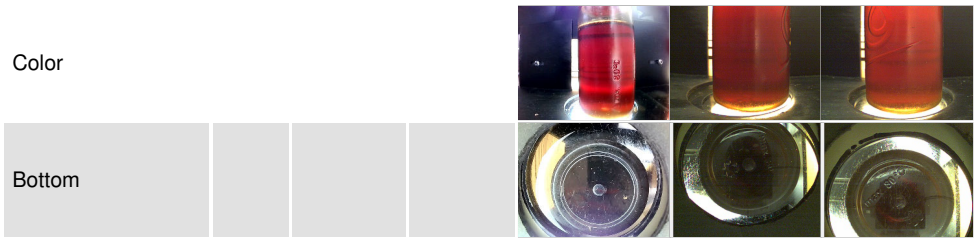


## GRAPHS


### Ferrous Alloys

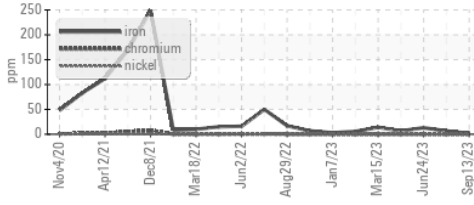


### Non-ferrous Metals

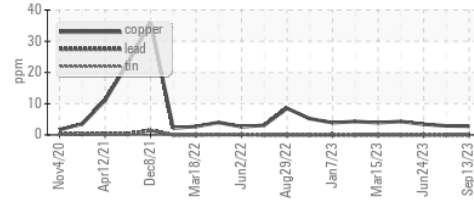


### ▲ Viscosity @ 40°C

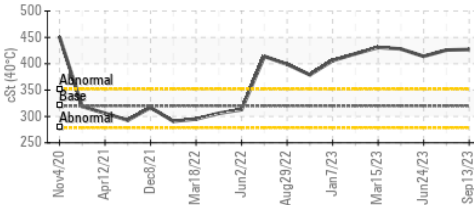

### ▲ Particle Count

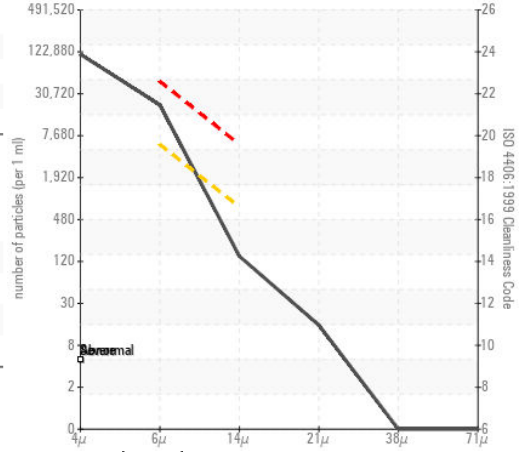

### Acid Number

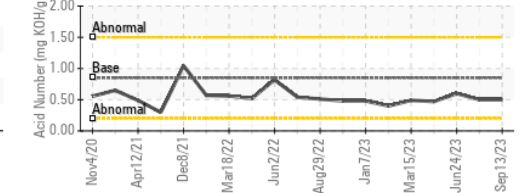

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : KL0012958 Received : 29 Sep 2023  
 Lab Number : 05965359 Diagnosed : 02 Oct 2023  
 Unique Number : 10671910 Diagnostician : Don Baldrige  
 Test Package : MOB 2 ( Additional Tests: PrtCount )

**CITADEL DRILLING**  
 7550 W 120  
 ODESSA, TX  
 US 79763  
 Contact: MIKE COMBDEN  
 mcombden@citadelldrilling.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (780)955-5509

F: