


PROBLEM SUMMARY

ISO


KAESER CSD 125 3322049 (S/N 1054)

Compressor

KAESER SIGMA (OEM) S-460 (--- LTR)

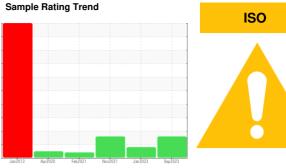

COMPONENT CONDITION SUMMARY

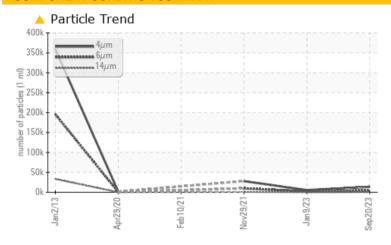

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | | |
|--------------------------|--------------|---------|-----------------|---------------|----------------|--|--|--|
| Sample Status | | | ABNORMAL | ATTENTION | ABNORMAL | | | |
| Particles >6µm | ASTM D7647 | >1300 | 4530 | ▲ 1739 | △ 9877 | | | |
| Particles >14µm | ASTM D7647 | >80 | 505 | 55 | ▲ 834 | | | |
| Particles >21µm | ASTM D7647 | >20 | 132 | 8 | <u>▲</u> 142 | | | |
| Oil Cleanliness | ISO 4406 (c) | >/17/13 | 21/19/16 | 20/18/13 | <u>^</u> 20/17 | | | |

Customer Id: MARDAL Sample No.: KCPA000838 Lab Number: 05965384 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------|--------|------|---------|---|
| Change Fluid | | | ? | Oil and filter change at the time of sampling has been noted. |
| Change Filter | | | ? | Oil and filter change at the time of sampling has been noted. |

HISTORICAL DIAGNOSIS

09 Jan 2023 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



29 Nov 2021 Diag: Jonathan Hester

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

10 Feb 2021 Diag: Jonathan Hester

VIS DEBRIS



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT


Sample Rating Trend

ISO

KAESER CSD 125 3322049 (S/N 1054)

Compressor

KAESER SIGMA (OEM) S-460 (--- LTR)





DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | Jan 2013 | Apr2020 Feb2021 | Nov2021 Jan2023 | Sep2023 | |
|-----------------|--------|--------------|-----------------|-----------------|-------------------|---------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | KCPA000838 | KCP55144 | KCP36871 |
| Sample Date | | Client Info | | 20 Sep 2023 | 09 Jan 2023 | 29 Nov 2021 |
| Machine Age | hrs | Client Info | | 23199 | 18270 | 13082 |
| Oil Age | hrs | Client Info | | 0 | 5187 | 4878 |
| Oil Changed | | Client Info | | Changed | Not Changd | Changed |
| Sample Status | | | | ABNORMAL | ATTENTION | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | 0 | <1 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | 0 | 0 |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 5 | 10 | 12 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 1 |
| Barium | ppm | ASTM D5185m | 90 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 90 | 2 | 4 | 1 |
| Calcium | ppm | ASTM D5185m | 2 | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 0 | 5 | 4 |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | | 10087 | 14068 | 14011 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | <1 | 1 |
| Sodium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | <1 | <1 |
| Water | % | ASTM D6304 | | 0.004 | 0.00 | 0.006 |
| ppm Water | ppm | ASTM D6304 | >500 | 48.1 | 0.00 | 66.4 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 13639 | 5425 | 27905 |
| Particles >6µm | | ASTM D7647 | >1300 | 4530 | △ 1739 | △ 9877 |
| Particles >14μm | | ASTM D7647 | >80 | <u> </u> | 55 | ▲ 834 |
| Particles >21µm | | ASTM D7647 | >20 | <u> </u> | 8 | <u> </u> |
| Particles >38µm | | ASTM D7647 | >4 | 3 | 1 | <u>^</u> 6 |
| Particles >71µm | | ASTM D7647 | >3 | 0 | 1 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | <u>21/19/16</u> | <u>^</u> 20/18/13 | △ 20/17 |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| | | | | | | |



OIL ANALYSIS REPORT

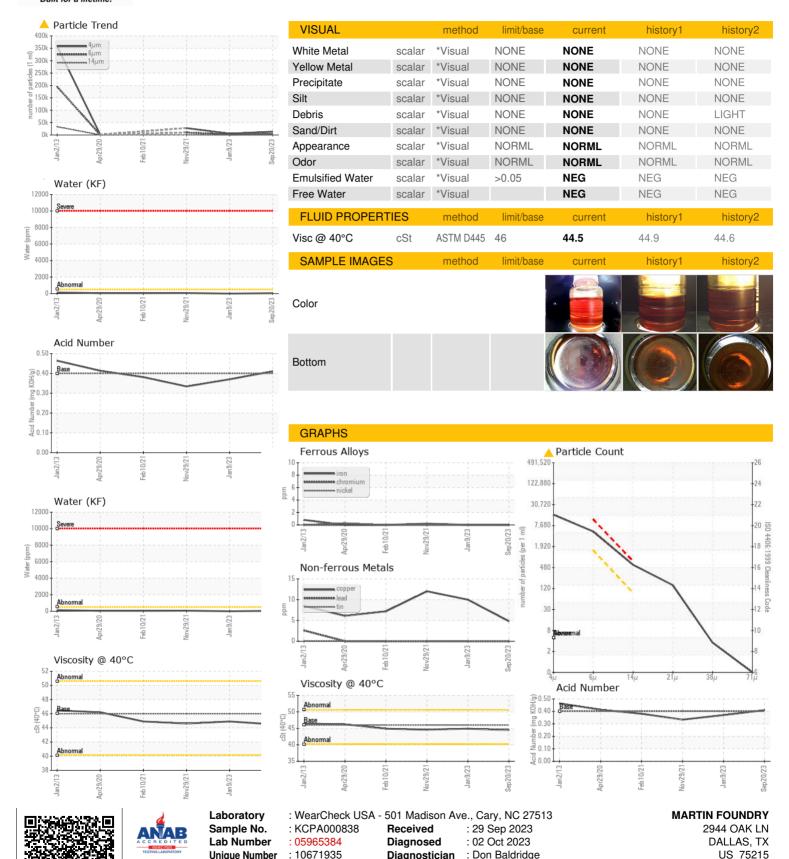

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: F:

Contact: SERVICE MANAGER