

PROBLEM SUMMARY



ISO


Machine Id **4922827 (S/N 1139)**

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

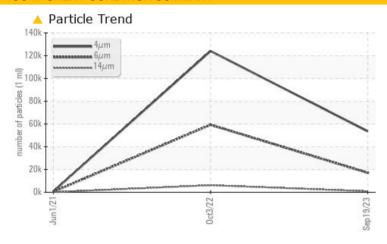

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL	ABNORMAL	ABNORMAL				
Particles >6µm	ASTM D7647	>1300	<u> </u>	△ 59292	443				
Particles >14μm	ASTM D7647	>80	884	△ 6173	75				
Particles >21µm	ASTM D7647	>20	137	<u>1205</u>	25				
Oil Cleanliness	ISO 4406 (c)	>/17/13	23/21/17	24/23/20	16/13				

Customer Id: SCHFTWTX Sample No.: KCPA000600 Lab Number: 05965393 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

03 Oct 2022 Diag: Doug Bogart

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service



01 Jun 2021 Diag: Jonathan Hester

WAIER



Oil and filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. The copper level is abnormal. All other component wear rates are normal. Free water present. There is a moderate concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

ISO

4922827 (S/N 1139)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jui	2021	Oct2022 Sep202	23	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA000600	KCP50188	KCP32780
Sample Date		Client Info		19 Sep 2023	03 Oct 2022	01 Jun 2021
Machine Age	hrs	Client Info		4342	3946	3529
Oil Age	hrs	Client Info		0	417	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	<1	3
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	4	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	7	16	<u>^</u> 74
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				4
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	12
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		0	1	<1
Magnesium	ppm	ASTM D5185m	100	37	7	<1
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	4	16	52
Zinc	ppm	ASTM D5185m	0	36	36	6
Sulfur	ppm	ASTM D5185m	23500	18480	19614	10639
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		23	6	1
Potassium	ppm	ASTM D5185m	>20	4	0	0
Water	%	ASTM D6304		0.013	0.037	△ 0.367
ppm Water	ppm	ASTM D6304	>500	137.4	376.6	▲ 3670
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		53508	124071	813
Particles >6µm		ASTM D7647		<u> </u>	<u>▲</u> 59292	443
Particles >14μm		ASTM D7647	>80	<u>^</u> 884	<u>▲</u> 6173	75
Particles >21μm		ASTM D7647	>20	<u> </u>	<u>1205</u>	25
Particles >38μm		ASTM D7647	>4	1	<u>102</u>	4
Particles >71μm		ASTM D7647	>3	0	<u> </u>	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>23/21/17</u>	<u>4</u> 24/23/20	16/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	1/011/	4 O T 1 B C C 1 F	4 0			



OIL ANALYSIS REPORT

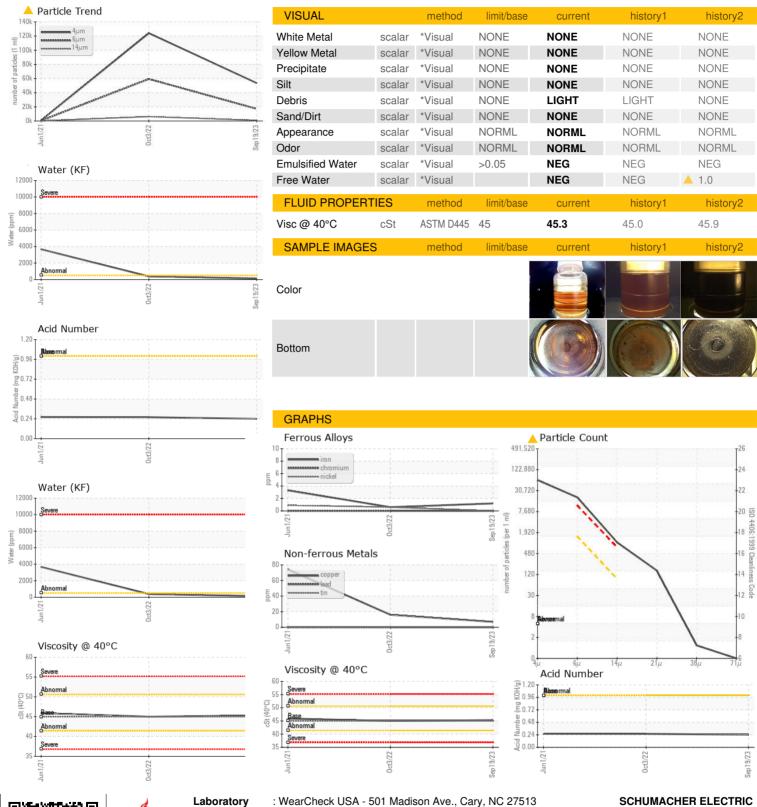





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: KCPA000600 : 05965393

Received Diagnosed

: 10671944 Diagnostician : Don Baldridge

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: 29 Sep 2023

: 02 Oct 2023

14200 FAA BLVD FT WORTH, TX US 76155

Contact: Service Manager