




# PROBLEM SUMMARY

Sample Rating Trend

ISO




Machine Id  
**GARDNER DENVER SOUTH GD (S/N S623137)**  
Component  
**Air Compressor**  
Fluid  
**AEON 6000FG-46 (--- GAL)**

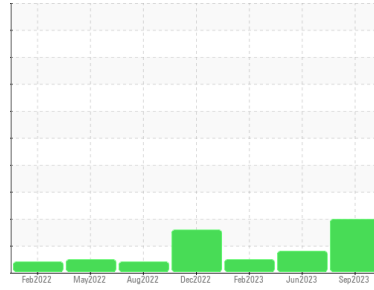

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

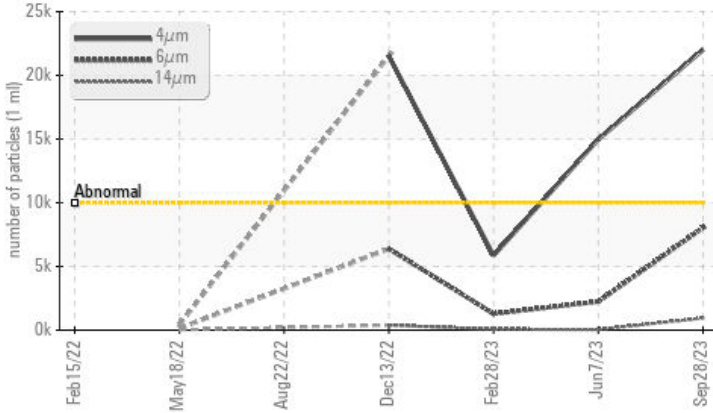

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

| Sample Status   |              |           | ABNORMAL          | ATTENTION  | NORMAL   |
|-----------------|--------------|-----------|-------------------|------------|----------|
| Particles >4µm  | ASTM D7647   | >10000    | ▲ <b>22002</b>    | ▲ 14975    | 5859     |
| Particles >6µm  | ASTM D7647   | >2500     | ▲ <b>8039</b>     | 2245       | 1283     |
| Particles >14µm | ASTM D7647   | >320      | ▲ <b>944</b>      | 39         | 71       |
| Particles >21µm | ASTM D7647   | >80       | ▲ <b>226</b>      | 7          | 16       |
| Oil Cleanliness | ISO 4406 (c) | >20/18/15 | ▲ <b>22/20/17</b> | ▲ 21/18/12 | 20/17/13 |

Customer Id: CAVHER  
Sample No.: USP0001784  
Lab Number: 05965415  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action        | Status | Date | Done By | Description   |
|---------------|--------|------|---------|---|
| Change Filter | ---    | ---  | ?       | We recommend you service the filters on this component if applicable. |

## HISTORICAL DIAGNOSIS

### 07 Jun 2023 Diag: Doug Bogart

ISO



Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of silt (particulates < 6 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 28 Feb 2023 Diag: Doug Bogart

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 13 Dec 2022 Diag: Doug Bogart

ISO



We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

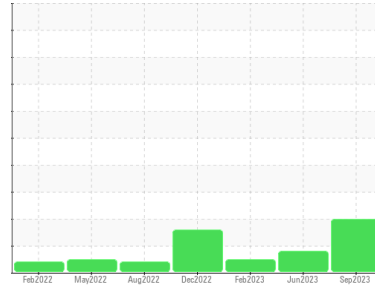

ISO



Machine Id  
**GARDNER DENVER SOUTH GD (S/N S623137)**

Component  
**Air Compressor**  
Fluid  
**AEON 6000FG-46 (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>USP0001784</b>  | USP243677   | USP246443   |
| Sample Date   | Client Info |             | <b>28 Sep 2023</b> | 07 Jun 2023 | 28 Feb 2023 |
| Machine Age   | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>ABNORMAL</b>    | ATTENTION   | NORMAL      |

## WEAR METALS

|          | method | limit/base      | current  | history1 | history2 |
|----------|--------|-----------------|----------|----------|----------|
| Iron     | ppm    | ASTM D5185m >50 | <b>0</b> | 0        | 0        |
| Chromium | ppm    | ASTM D5185m >4  | <b>0</b> | 0        | 0        |
| Nickel   | ppm    | ASTM D5185m >4  | <b>0</b> | 0        | 0        |
| Titanium | ppm    | ASTM D5185m     | <b>0</b> | 0        | 0        |
| Silver   | ppm    | ASTM D5185m     | <b>0</b> | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >10 | <b>0</b> | <1       | 0        |
| Lead     | ppm    | ASTM D5185m >20 | <b>0</b> | 0        | 0        |
| Copper   | ppm    | ASTM D5185m >40 | <b>0</b> | <1       | 0        |
| Tin      | ppm    | ASTM D5185m >5  | <b>0</b> | 0        | 0        |
| Vanadium | ppm    | ASTM D5185m     | <b>0</b> | 0        | 0        |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b> | 0        | 0        |

## ADDITIVES

|            | method | limit/base  | current    | history1 | history2 |
|------------|--------|-------------|------------|----------|----------|
| Boron      | ppm    | ASTM D5185m | <b>0</b>   | 0        | 0        |
| Barium     | ppm    | ASTM D5185m | <b>0</b>   | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m | <b>0</b>   | 0        | 0        |
| Manganese  | ppm    | ASTM D5185m | <b>0</b>   | <1       | <1       |
| Magnesium  | ppm    | ASTM D5185m | <b>0</b>   | 0        | 0        |
| Calcium    | ppm    | ASTM D5185m | <b>0</b>   | 0        | 0        |
| Phosphorus | ppm    | ASTM D5185m | <b>195</b> | 242      | 260      |
| Zinc       | ppm    | ASTM D5185m | <b>0</b>   | 0        | 0        |
| Sulfur     | ppm    | ASTM D5185m | <b>229</b> | 396      | 21       |

## CONTAMINANTS

|           | method | limit/base       | current      | history1 | history2 |
|-----------|--------|------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >25  | <b>0</b>     | <1       | <1       |
| Sodium    | ppm    | ASTM D5185m      | <b>0</b>     | 0        | 0        |
| Potassium | ppm    | ASTM D5185m >20  | <b>0</b>     | 0        | 0        |
| Water     | %      | ASTM D6304 >0.6  | <b>0.002</b> | 0.003    | 0.005    |
| ppm Water | ppm    | ASTM D6304 >6000 | <b>16.4</b>  | 39.1     | 50.8     |

## FLUID CLEANLINESS

|                 | method       | limit/base | current           | history1   | history2 |
|-----------------|--------------|------------|-------------------|------------|----------|
| Particles >4µm  | ASTM D7647   | >10000     | ▲ <b>22002</b>    | ▲ 14975    | 5859     |
| Particles >6µm  | ASTM D7647   | >2500      | ▲ <b>8039</b>     | 2245       | 1283     |
| Particles >14µm | ASTM D7647   | >320       | ▲ <b>944</b>      | 39         | 71       |
| Particles >21µm | ASTM D7647   | >80        | ▲ <b>226</b>      | 7          | 16       |
| Particles >38µm | ASTM D7647   | >20        | <b>6</b>          | 0          | 0        |
| Particles >71µm | ASTM D7647   | >4         | <b>0</b>          | 0          | 0        |
| Oil Cleanliness | ISO 4406 (c) | >20/18/15  | ▲ <b>22/20/17</b> | ▲ 21/18/12 | 20/17/13 |


## FLUID DEGRADATION

|                  | method   | limit/base | current     | history1 | history2 |
|------------------|----------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | <b>0.31</b> | 0.20     | 0.15     |




# OIL ANALYSIS REPORT


## Particle Trend

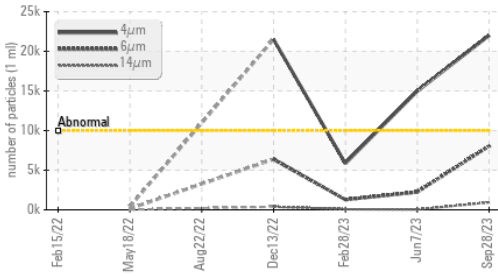


## Water (KF)

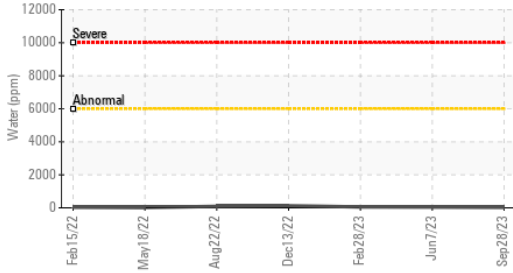


## Acid Number

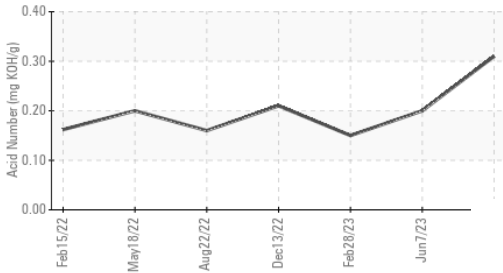

## Water (KF)

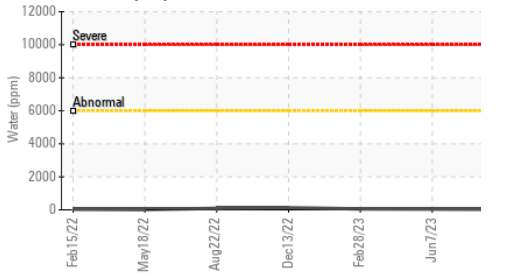


## Viscosity @ 40°C

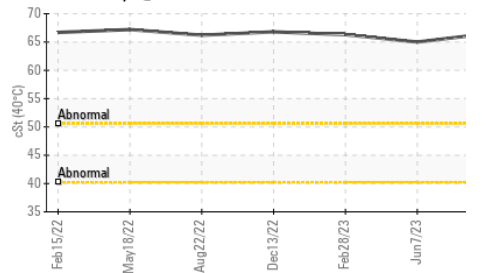




| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | LIGHT    | VLITE    |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.6    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | 66.5    | 65.0     | 66.3     |

## SAMPLE IMAGES

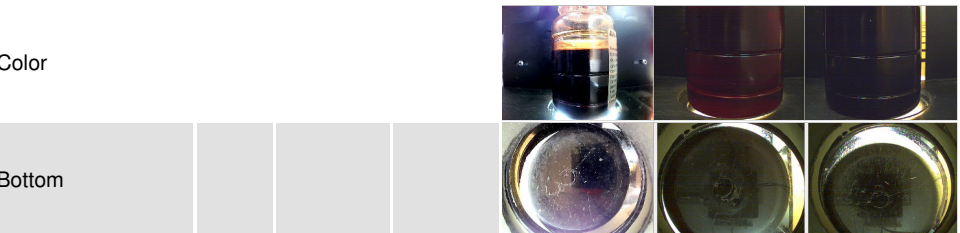

## GRAPHS

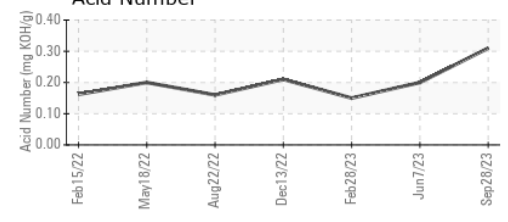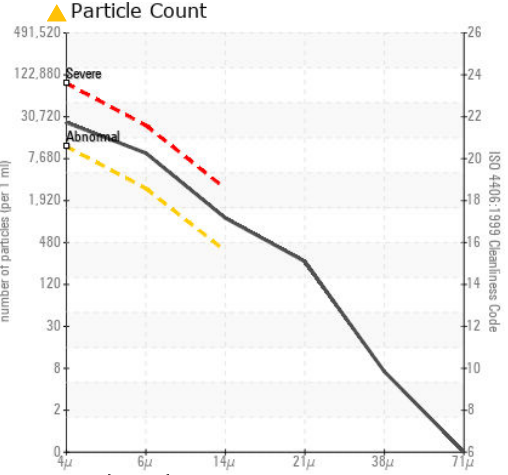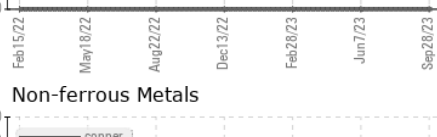

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0001784  
**Lab Number** : 05965415  
**Unique Number** : 10671966  
**Test Package** : IND 2  
**Received** : 29 Sep 2023  
**Diagnosed** : 02 Oct 2023  
**Diagnostician** : Doug Bogart

**CAVINNESS BEEF PACKERS LTD**  
 PO BOX 790  
 HEREFORD, TX  
 US 79045  
 Contact: HARRY RADLOFF

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (806)357-2443  
 F: (806)357-2468