




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

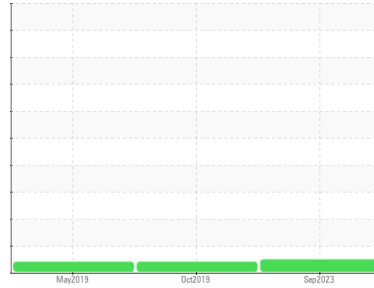

Machine Id  
**HARVEST HPU 1500 GAL**  
 Component  
**Hydraulic System**  
 Fluid  
**LUBRIPLATE AW-46 (1500 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USP0001780</b>	USP04814417	USP194494
Sample Date	Client Info	<b>28 Sep 2023</b>	01 Oct 2019	31 May 2019
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	ABNORMAL	ATTENTION

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>1</b>	2	2
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	1	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	<1	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	3	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>4</b>	29	105
Calcium	ppm	ASTM D5185m	<b>33</b>	35	84
Phosphorus	ppm	ASTM D5185m	<b>282</b>	256	382
Zinc	ppm	ASTM D5185m	<b>337</b>	291	480
Sulfur	ppm	ASTM D5185m	<b>781</b>	1177	2274

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	6	0
Water	%	ASTM D6304 >0.05	<b>0.001</b>	0.007	0.009
ppm Water	ppm	ASTM D6304 >500	<b>0.00</b>	77.5	90

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>3295</b>	17890	2125
Particles >6µm	ASTM D7647 >1300	<b>881</b>	▲ 3134	408
Particles >14µm	ASTM D7647 >160	<b>96</b>	110	28
Particles >21µm	ASTM D7647 >40	<b>26</b>	19	10
Particles >38µm	ASTM D7647 >10	<b>1</b>	0	0
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>19/17/14</b>	▲ 21/19/14	18/16/12

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.27</b>	0.302	0.317




# OIL ANALYSIS REPORT

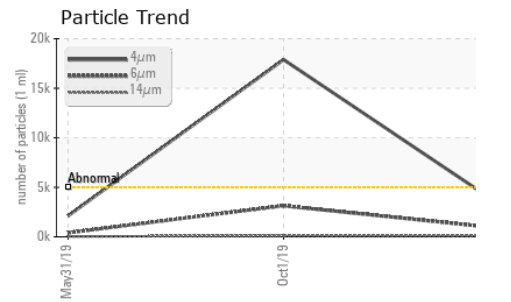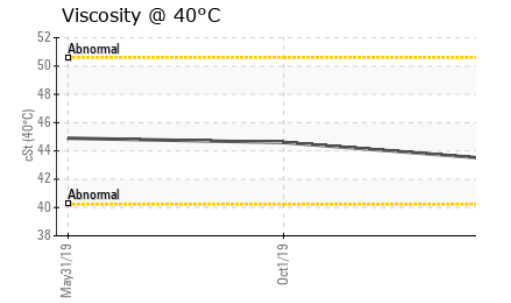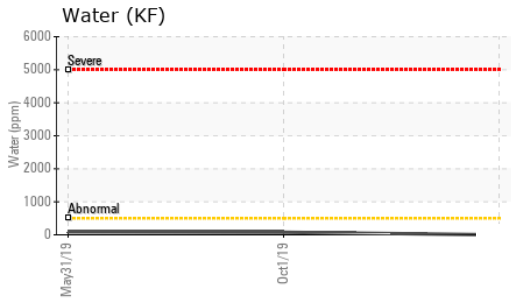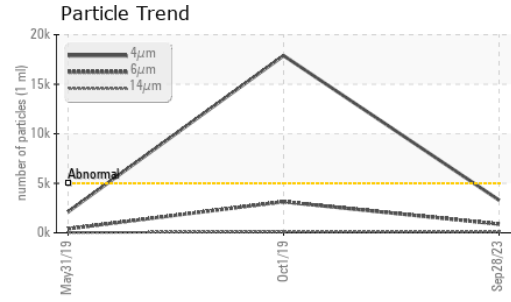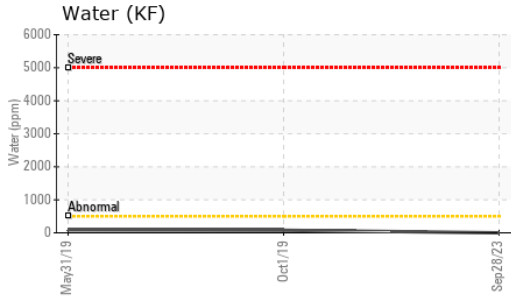






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	43.4	44.6	▲ 44.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

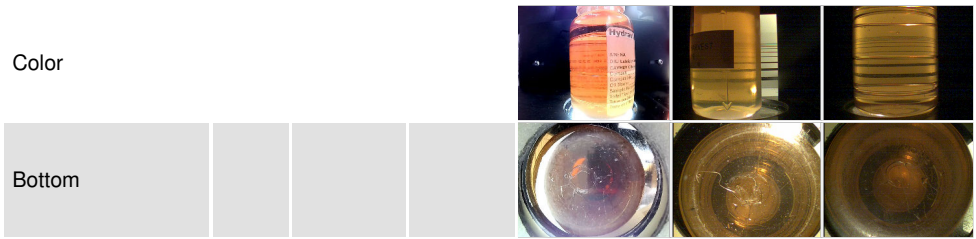

## GRAPHS

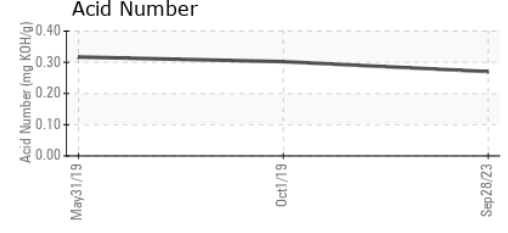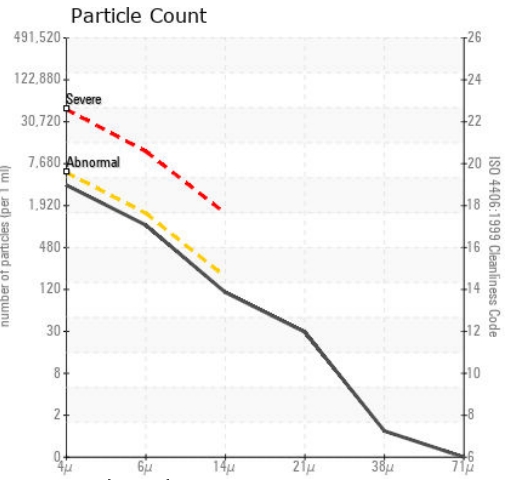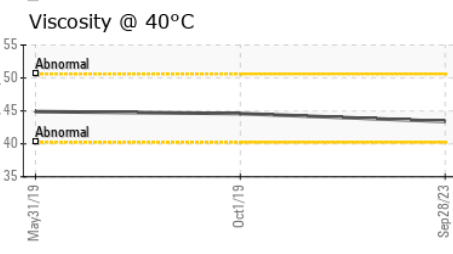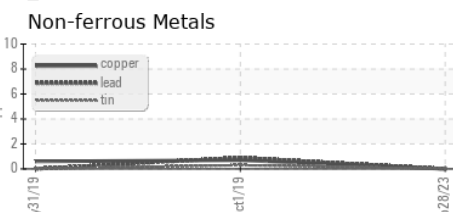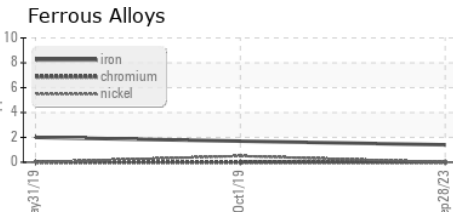

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : USP0001780 **Received** : 29 Sep 2023  
**Lab Number** : 05965418 **Diagnosed** : 02 Oct 2023  
**Unique Number** : 10671969 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2

**CAVINESS BEEF PACKERS LTD**  
 PO BOX 790  
 HEREFORD, TX  
 US 79045  
 Contact: HARRY RADLOFF

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (806)357-2443  
 F: (806)357-2468