

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

FRICK IC-1 (S/N 1289) Component

Refrigeration Compressor USPI 1009-68 SC (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0001799	USP243681	USP246447
Sample Date		Client Info		28 Sep 2023	07 Jun 2023	28 Feb 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	0
Chromium	ppm	ASTM D5185m	>2	0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	1	<1	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	<1	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m	27	0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		0	<1	0
Calcium	ppm	ASTM D5185m		1	0	0
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	7	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		1	<1	0
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.01	0.002	0.003	0.003
ppm Water	ppm	ASTM D6304	>100	20.6	29.0	29.4
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	2165	1585	1919
Particles >6µm		ASTM D7647	>2500	370	296	330
Particles >14µm		ASTM D7647	>320	14	8	12
Particles >21µm		ASTM D7647	>80	3	1	3
Particles >38µm		ASTM D7647	>20	0	0	0
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/16/11	18/15/10	18/16/11
FLUID DEGRADATION method limit/base current history1 history2						
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.011	0.014	0.015



Water (KF)

OIL ANALYSIS REPORT

scalar

scalar

scalar

scalar

scalar

White Metal


Yellow Metal


Precipitate

Silt

Debris

Sand/Dirt



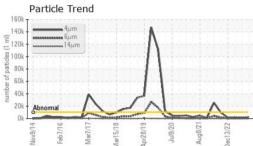



*Visual

*Visual

*Visual

*Visual

*Visual

scalar *Visual

NONE

Particle Count

Acid Number

Feb7/16

491 52

122,88

30.72

480

120

30

(B/HOX Bw)

0.02

0.0

P 0.00

: Doug Bogart

Der 1,920 NONE

NORML

NORML

NEG


NEG


65.5

20 8

1406

6661

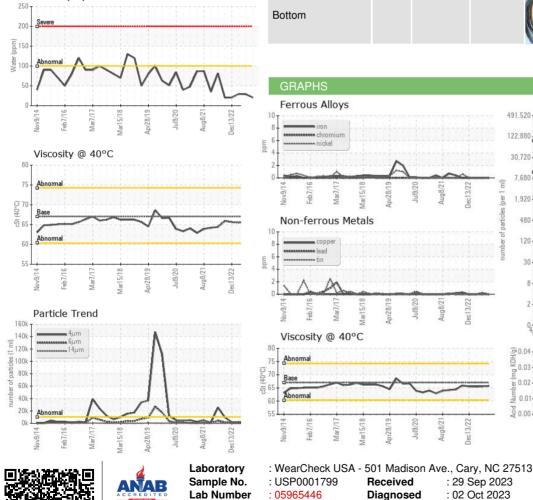



ul9/20

pr28/19

Mar15/1

: 10671997 Test Package : IND 2 Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Unique Number

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnostician

T: (806)357-2443 F: (806)357-2468

Contact/Location: HARRY RADLOFF - CAVHER