




OIL ANALYSIS REPORT



Area
RIG 4
Machine Id
CATERPILLAR 3512 R4-G-01 NKL
Component
Diesel Engine
Fluid
CHEVRON 15W40 (--- GAL)

Sample Rating Trend

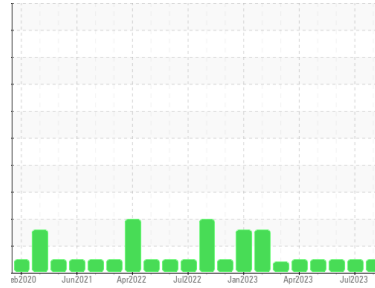

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0012982	KL0012767	KL0012497
Sample Date	Client Info		13 Sep 2023	28 Jul 2023	24 Jun 2023
Machine Age	days	Client Info	45180	45134	45099
Oil Age	days	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	3	4	6
Chromium	ppm	ASTM D5185m >20	0	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	7	5	4
Lead	ppm	ASTM D5185m >40	0	0	<1
Copper	ppm	ASTM D5185m >330	<1	<1	2
Tin	ppm	ASTM D5185m >15	0	0	<1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	410	337	386
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	134	136	136
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m	715	677	748
Calcium	ppm	ASTM D5185m	1597	1578	1740
Phosphorus	ppm	ASTM D5185m	724	694	760
Zinc	ppm	ASTM D5185m	882	882	914
Sulfur	ppm	ASTM D5185m	2563	2789	3079

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	5	10
Sodium	ppm	ASTM D5185m >50	<1	4	2
Potassium	ppm	ASTM D5185m >20	0	2	1


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	6.5	6.8	7.4
Sulfation	Abs./1mm	*ASTM D7415 >30	22.1	23.8	24.0




OIL ANALYSIS REPORT


Particle Trend

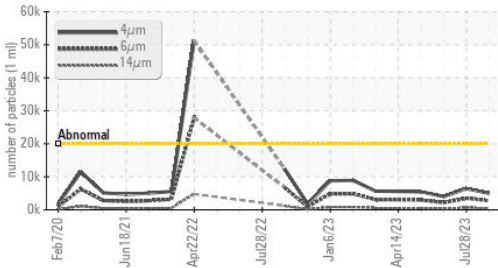


Base Number

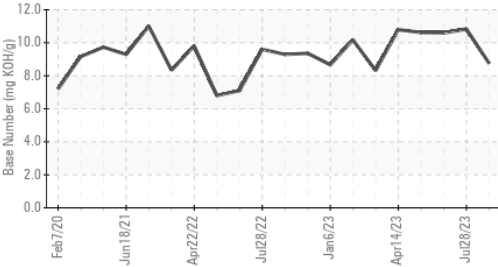

Viscosity @ 100°C

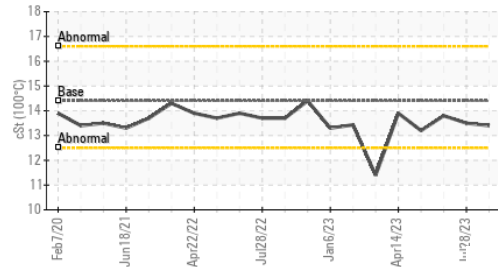

Particle Trend

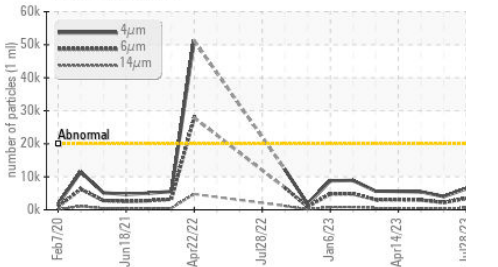

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>20000	5002	6412	4019
Particles >6µm	ASTM D7647	>5000	2725	3493	2190
Particles >14µm	ASTM D7647	>640	464	594	373
Particles >21µm	ASTM D7647	>160	156	200	126
Particles >38µm	ASTM D7647	>40	24	31	19
Particles >71µm	ASTM D7647	>10	2	3	2
Oil Cleanliness	ISO 4406 (c)	>21/19/16	20/19/16	20/19/16	19/18/16


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	17.3	17.6
Base Number (BN)	mg KOH/g	ASTM D2896		8.76	10.83	10.59

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	13.5	13.8

GRAPHS


Ferrous Alloys

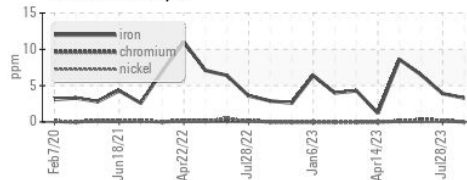


Non-ferrous Metals

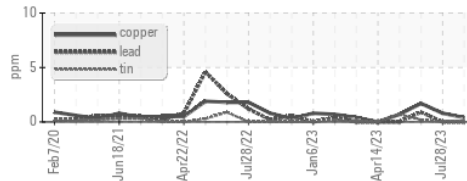


Viscosity @ 100°C

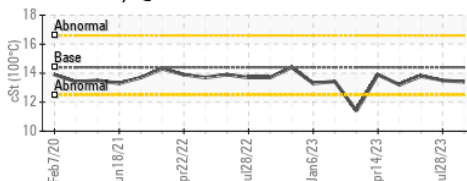

Particle Count

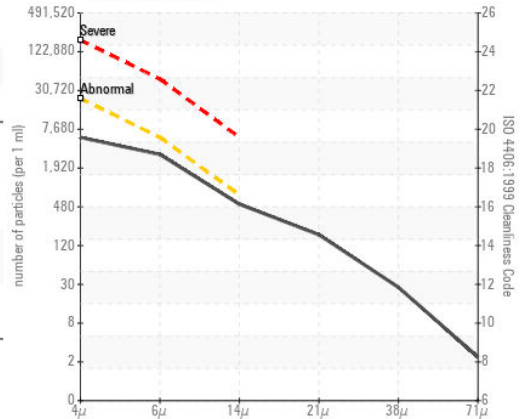

Base Number

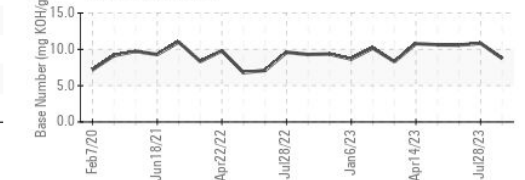

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : KL0012982
 Lab Number : 05965532
 Unique Number : 10672083
 Test Package : MOB 2 (Additional Tests: PrtCount)

Received : 29 Sep 2023
 Diagnosed : 04 Oct 2023
 Diagnostician : Jonathan Hester

CITADEL DRILLING
 7550 W 120
 ODESSA, TX
 US 79763

Contact: MIKE COMBDEN
 mcombden@citadelldrilling.com

T: (780)955-5509

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)