



OIL ANALYSIS REPORT

Sample Rating Trend



GLYCOL

Machine Id
Kubota SVL-97
 Component
Diesel Engine
 Fluid
 {not provided} (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Sodium and/or potassium levels are high. Light fuel dilution occurring. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KFS0003931	---	---
Sample Date	Client Info		25 Sep 2023	---	---
Machine Age	hrs	Client Info	270	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	23	---
Chromium	ppm	ASTM D5185m	>20	0	---
Nickel	ppm	ASTM D5185m	>4	<1	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m	>3	0	---
Aluminum	ppm	ASTM D5185m	>20	6	---
Lead	ppm	ASTM D5185m	>40	<1	---
Copper	ppm	ASTM D5185m	>330	38	---
Tin	ppm	ASTM D5185m	>15	<1	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		142	---
Barium	ppm	ASTM D5185m		0	---
Molybdenum	ppm	ASTM D5185m		133	---
Manganese	ppm	ASTM D5185m		2	---
Magnesium	ppm	ASTM D5185m		26	---
Calcium	ppm	ASTM D5185m		2690	---
Phosphorus	ppm	ASTM D5185m		552	---
Zinc	ppm	ASTM D5185m		660	---
Sulfur	ppm	ASTM D5185m		3274	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	24	---
Sodium	ppm	ASTM D5185m		3	---
Potassium	ppm	ASTM D5185m	>20	▲ 134	---
Fuel	%	ASTM D3524	>5	▲ 2.4	---
Glycol	%	*ASTM D2982		NEG	---






INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	6.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	15.0	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	8.5	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.60	---









OIL ANALYSIS REPORT

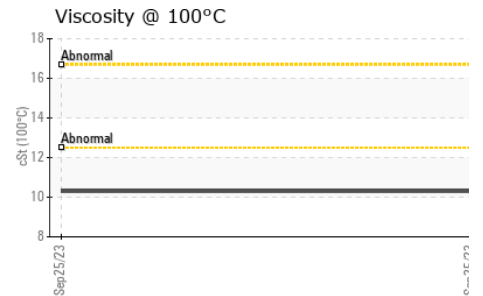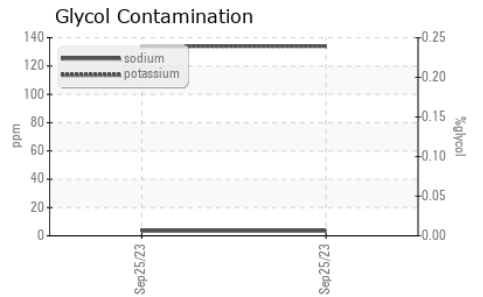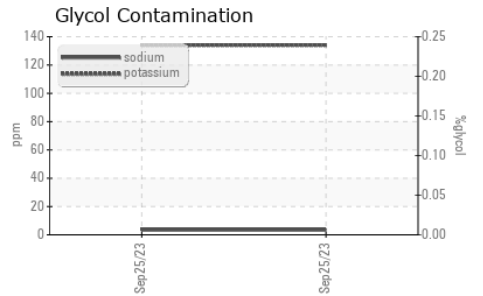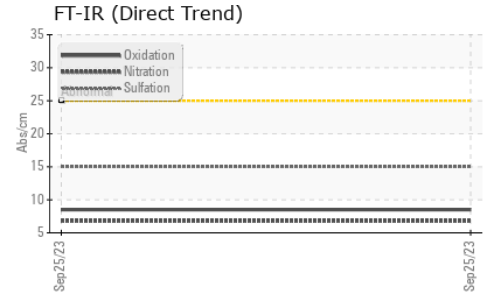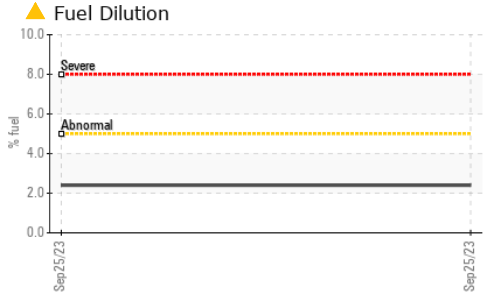

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.3	---	---

GRAPHS

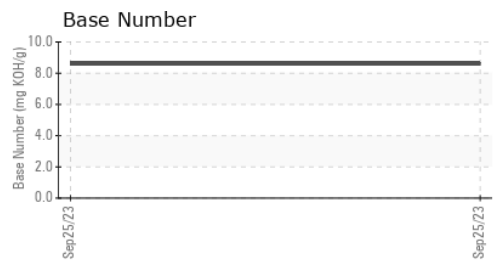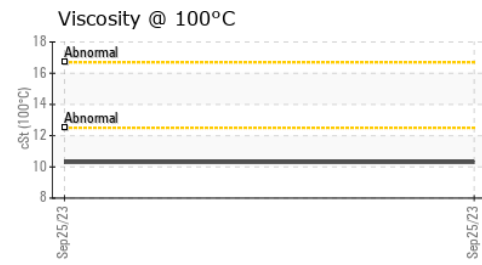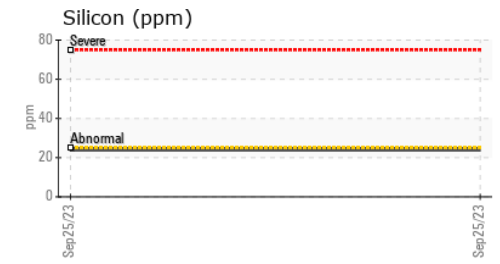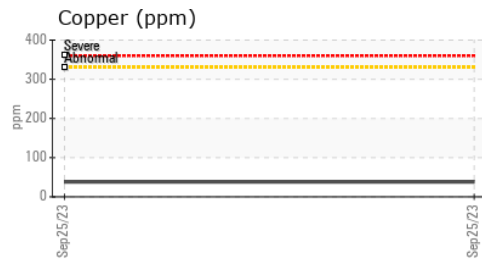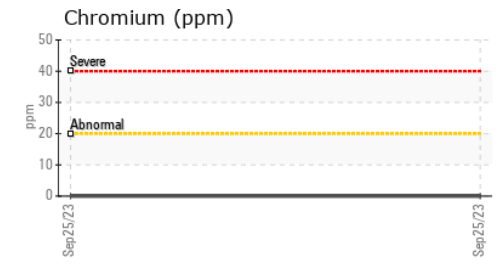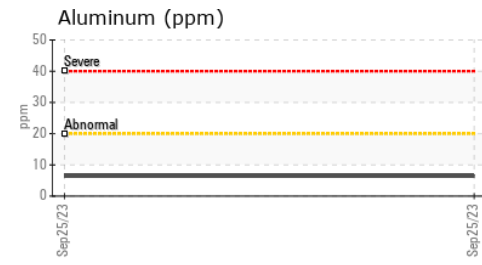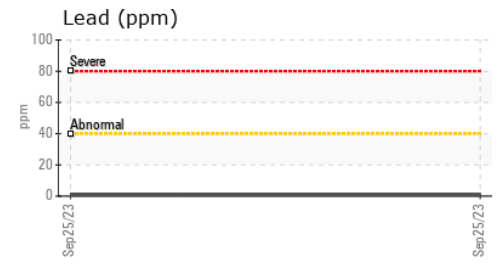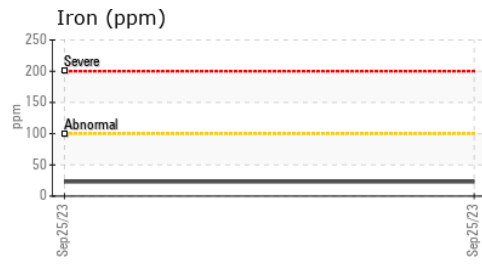

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KFS0003931 **Received** : 29 Sep 2023
Lab Number : 05965555 **Tested** : 04 Oct 2023
Unique Number : 10672106 **Diagnosed** : 04 Oct 2023 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, Glycol, PercentFuel)

HARNES LLC
 855 N JAMES CAMPBELL BLVD
 COLUMBIA, TN
 US 38401
 Contact: BEN HARNES
 ben@slectharness.com
 T: (615)733-4480
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)