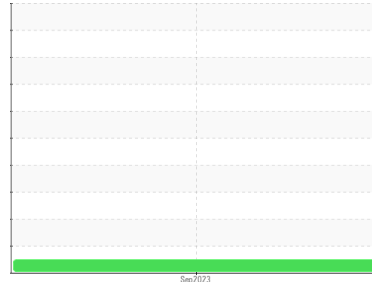


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Area
[W46757]
Machine Id
JOHN DEERE 755K 1T0755KXLNF427051
Component
Left Outer Final Drive
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)


DIAGNOSIS
Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0165791	---	---
Sample Date	Client Info		26 Sep 2023	---	---
Machine Age	hrs	Client Info	1005	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>1250	84	---	---
Iron	ppm	ASTM D5185m	>750	53	---
Chromium	ppm	ASTM D5185m	>9	<1	---
Nickel	ppm	ASTM D5185m	>10	0	---
Titanium	ppm	ASTM D5185m		0	---
Silver	ppm	ASTM D5185m		0	---
Aluminum	ppm	ASTM D5185m	>40	11	---
Lead	ppm	ASTM D5185m	>15	<1	---
Copper	ppm	ASTM D5185m	>40	0	---
Tin	ppm	ASTM D5185m	>10	0	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	3	---
Barium	ppm	ASTM D5185m	0	0	---
Molybdenum	ppm	ASTM D5185m	0	<1	---
Manganese	ppm	ASTM D5185m		<1	---
Magnesium	ppm	ASTM D5185m	145	105	---
Calcium	ppm	ASTM D5185m	3570	3391	---
Phosphorus	ppm	ASTM D5185m	1290	1030	---
Zinc	ppm	ASTM D5185m	1640	1272	---
Sulfur	ppm	ASTM D5185m		3797	---



CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	13	---
Sodium	ppm	ASTM D5185m	>51	1	---
Potassium	ppm	ASTM D5185m	>20	0	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---
Free Water	scalar	*Visual		NEG	---





OIL ANALYSIS REPORT

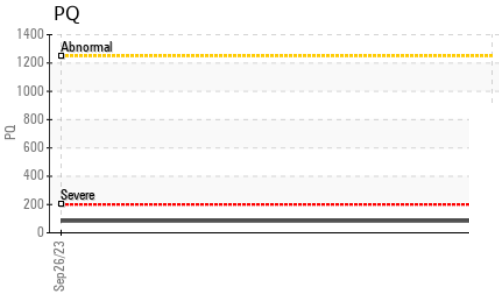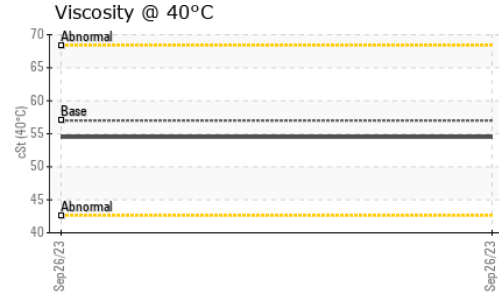

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	57.0	54.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

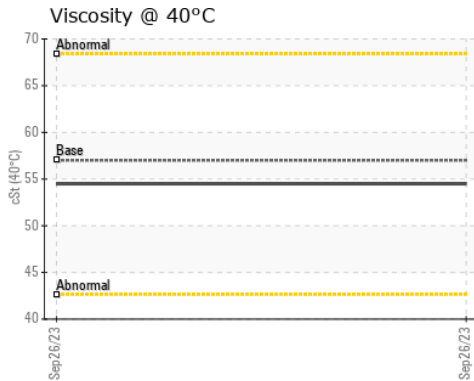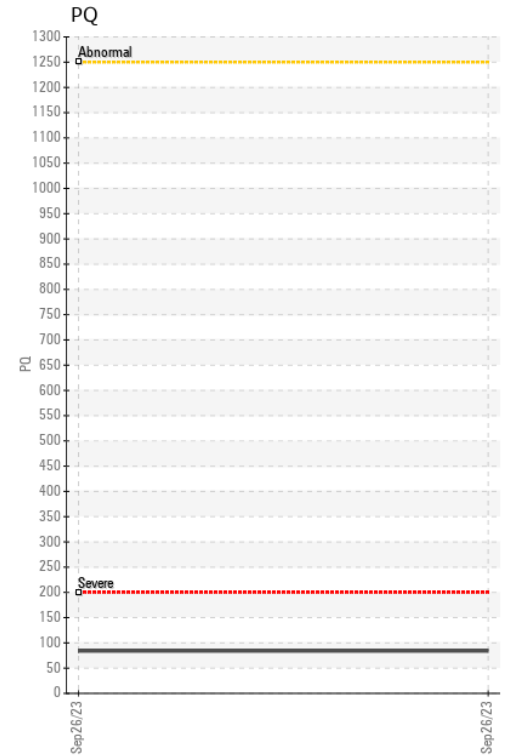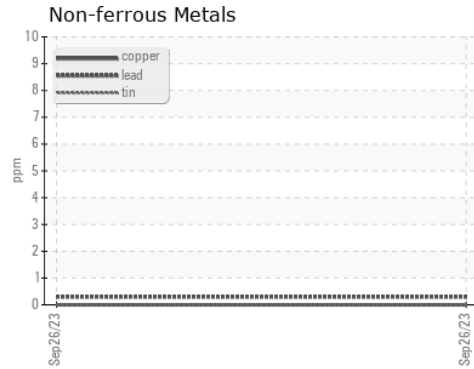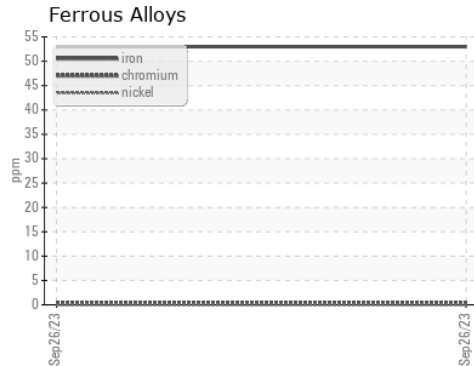

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0165791 **Received** : 29 Sep 2023
Lab Number : 05965608 **Diagnosed** : 02 Oct 2023
Unique Number : 10672159 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292