

FUEL REPORT

ASCENT RM 1

Component **Diesel Fuel**

DIESEL FUEL No. 1 (--- GAL)

Sample Rating Trend **NORMAL**

Recommendation

No corrective action is recommended at this time. All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

All metal levels are normal indicating no corrosion in the system.

Contaminants

There is a moderate amount of particulates present in the fuel. The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample.


Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation.

				Sep2023	,	
SAMPLE INFORM	MATION	method				history2
Sample Number		Client Info		WC0798123		
Sample Date		Client Info		28 Sep 2023		
Machine Age	hrs	Client Info		0		
Sample Status				NORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298		0.841		
Fuel Color	text	*Visual Screen		Red		
ASTM Color	scalar	*ASTM D1500		L4.0		
Visc @ 40°C	cSt	ASTM D445	2.4	2.53		
Pensky-Martens Flash Point	°C	*PMCC Calculated		59		
SULFUR CONTE	NT	method	limit/base	current	history1	history2
Sulfur		ASTM D5185m		16		
Sulfur (UVF)	ppm ppm	ASTM D5165111		22		
	PPIII					
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86		165		
5% Distillation Point	°C	ASTM D86		189		
10% Distill Point	°C	ASTM D86		200		
15% Distillation Point	_	ASTM D86		209		
20% Distill Point	°C	ASTM D86		217		
30% Distill Point	°C	ASTM D86		232		
40% Distill Point	°C	ASTM D86		247		
50% Distill Point	°C	ASTM D86		262		
60% Distill Point	°C	ASTM D86		277		
70% Distill Point	°C	ASTM D86		293		
80% Distill Point	°C	ASTM D86		310		
85% Distillation Point	°C	ASTM D86		319		
90% Distill Point	°C	ASTM D86		329		
95% Distillation Point	°C	ASTM D86		343		
Final Boiling Point	°C	ASTM D86		349		
Distillation Residue	%	ASTM D86		1.4		
Distillation Loss	%	ASTM D86		0.7		
IGNITION QUALIT	ΓΥ	method	limit/base	current	history1	history2
API Gravity		ASTM D7777		36.8		
Cetane Index		ASTM D4737	<40.0	48.4		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0		
Sodium	ppm	ASTM D5185m	<0.1	0		
Potassium	ppm	ASTM D5185m	< 0.1	0		
Water	%	ASTM D6304	< 0.05	0.003		
ppm Water	ppm	ASTM D6304	< 500	28.9		
% Gasoline	%	*In-House	< 0.50	0.0		



FUEL REPORT

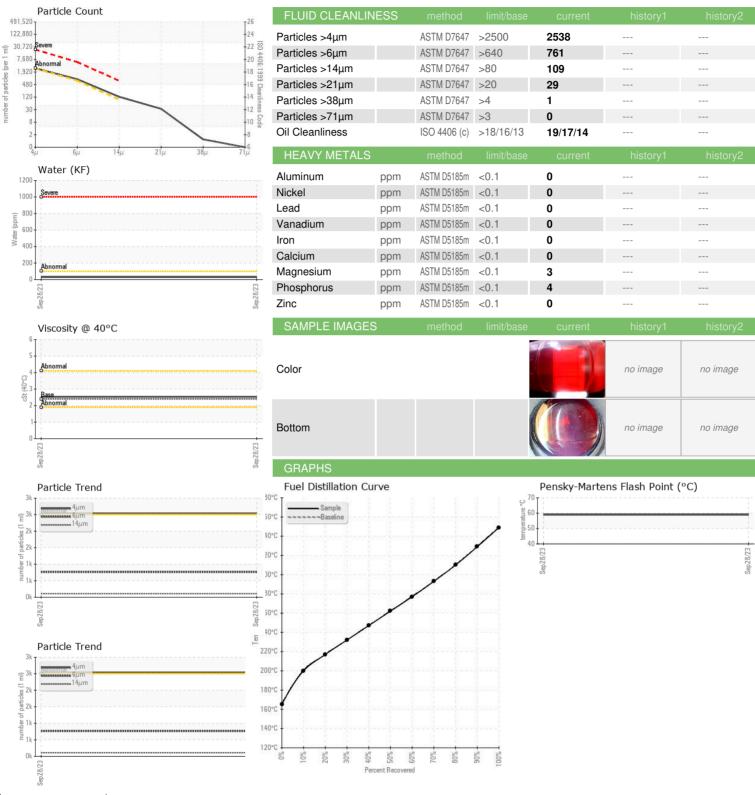



Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: WC0798123 : 05965851

: 10672402

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 29 Sep 2023 : 06 Oct 2023 Diagnosed

Diagnostician : Doug Bogart Test Package : DF-2 (Additional Tests: Screen)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

KB POWER SYSTEMS LLC

738 Old Buies Creek Rd Lillington, NC US 27546

Contact: DWAYNE REGISTER dwayne@kbpowersystemsnc.com

T: (919)577-9136

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: