




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

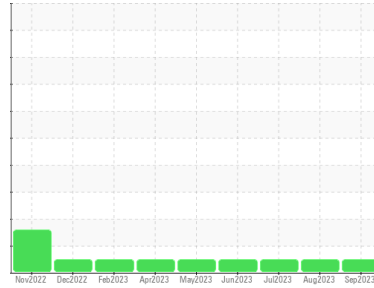

Machine Id  
**PETERBILT 01**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>WC0724731</b>	WC0724730	WC0724729	
Sample Date	Client Info	<b>21 Sep 2023</b>	27 Aug 2023	22 Jul 2023	
Machine Age	mls	Client Info	<b>1080826</b>	1072171	1062013
Oil Age	mls	Client Info	<b>10000</b>	1072171	12000
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >110	<b>6</b>	6	7
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	4	2
Lead	ppm	ASTM D5185m >45	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m >85	<b>1</b>	2	3
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 151	<b>473</b>	415	362
Barium	ppm	ASTM D5185m 0.4	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 250	<b>83</b>	78	80
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 0	<b>414</b>	392	337
Calcium	ppm	ASTM D5185m 2046	<b>1440</b>	1363	1698
Phosphorus	ppm	ASTM D5185m 1043	<b>1060</b>	1012	1061
Zinc	ppm	ASTM D5185m 943	<b>1335</b>	1205	1247
Sulfur	ppm	ASTM D5185m 5012	<b>3544</b>	3724	3367

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >30	<b>6</b>	7	6
Sodium	ppm	ASTM D5185m	<b>2</b>	4	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	4

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.8</b>	5.6	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.1</b>	20.5	20.7

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.4</b>	14.6	14.7
Base Number (BN)	mg KOH/g	ASTM D2896 12.5	<b>7.5</b>	7.2	8.0







# OIL ANALYSIS REPORT

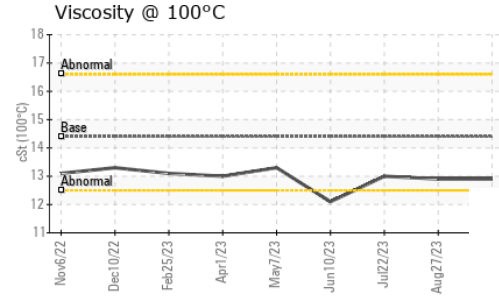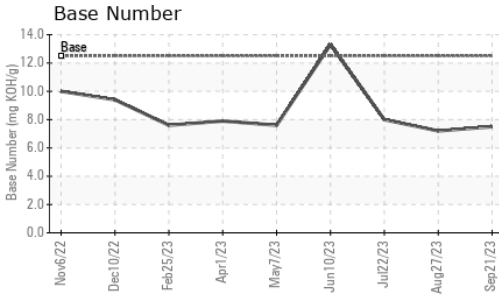

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.9</b>	12.9	13.0

### GRAPHS

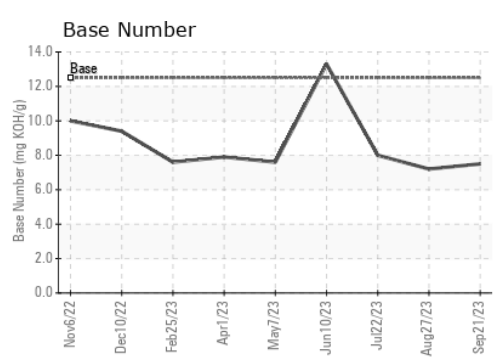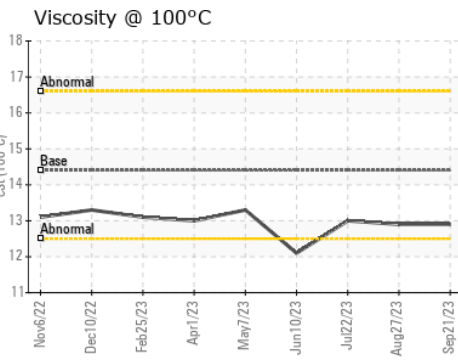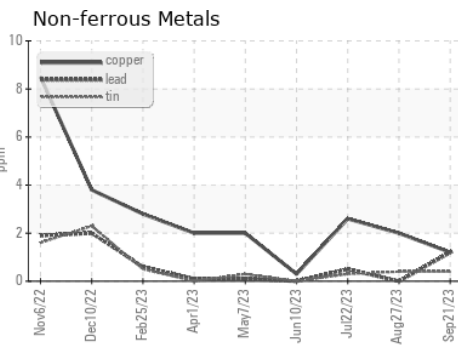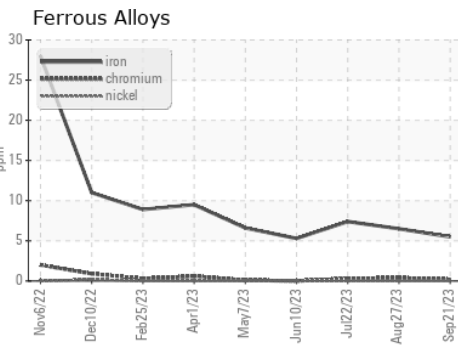

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0724731 **Received** : 02 Oct 2023  
**Lab Number** : **05965898** **Diagnosed** : 03 Oct 2023  
**Unique Number** : 10672449 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**MGK**  
 175 VAUGHT DR  
 TROUT, LA  
 US 71371  
 Contact: SERVICE MANAGER  
 gggreen77758@yahoo.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)