




# OIL ANALYSIS REPORT

Sample Rating Trend

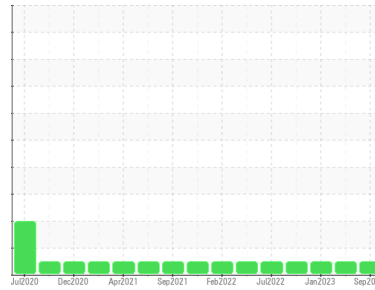

**NORMAL**



Machine Id  
**INTERNATIONAL 5012907**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>IL05966146</b>	IL05887251	IL05743872
Sample Date	Client Info			<b>25 Sep 2023</b>	22 Jun 2023	09 Jan 2023
Machine Age	mls Client Info			<b>251588</b>	231669	202672
Oil Age	mls Client Info			<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>36</b>	18	13
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	3	5
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>4</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>46</b>	118	34
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>102</b>	88	67
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>821</b>	499	787
Calcium	ppm	ASTM D5185m	3000	<b>1729</b>	1434	1284
Phosphorus	ppm	ASTM D5185m	1150	<b>1114</b>	995	734
Zinc	ppm	ASTM D5185m	1350	<b>1406</b>	1237	953
Sulfur	ppm	ASTM D5185m	4250	<b>3405</b>	3093	2842



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>9</b>	8	6
Sodium	ppm	ASTM D5185m	>216	<b>8</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	6	6

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>12.1</b>	10.3	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>26.3</b>	24.5	22.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.3</b>	20.7	21.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>4.5</b>	5.8	6.6







# OIL ANALYSIS REPORT

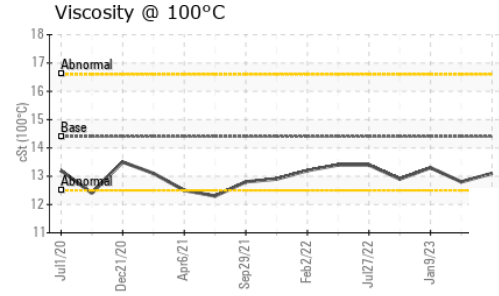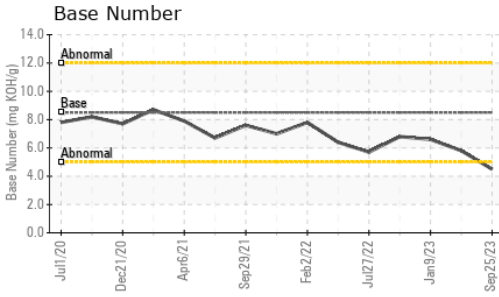

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.1</b>	12.8	13.3

### GRAPHS

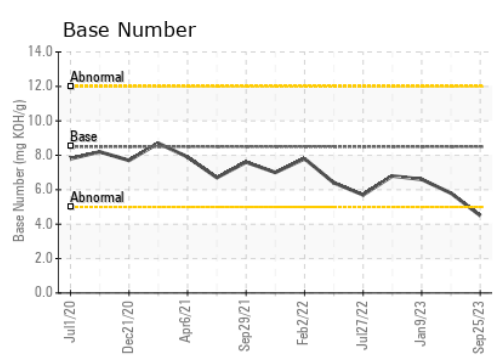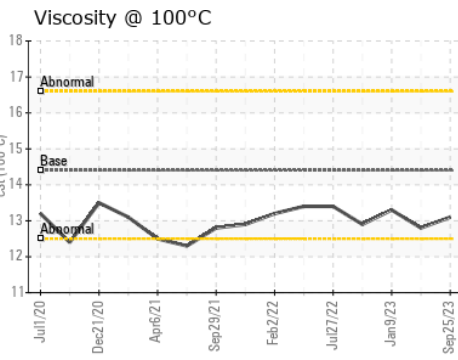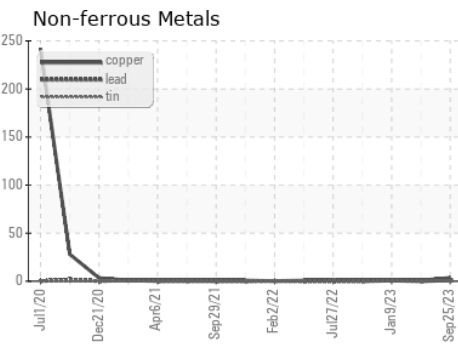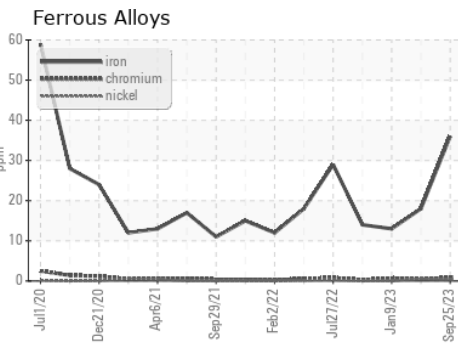

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL05966146 **Received** : 02 Oct 2023  
**Lab Number** : **05966146** **Diagnosed** : 03 Oct 2023  
**Unique Number** : 10672697 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**TAMPA IDEALEASE**  
 5951 ORIENT ROAD  
 TAMPA, FL  
 US 33610-9565  
 Contact: Russ Cook  
 russcook@idealease.com  
 T: (813)626-9285  
 F: (844)270-1356

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)