


OIL ANALYSIS REPORT

Sample Rating Trend







Machine Id **6321406**

Component **Diesel Engine**

DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

		,	Mar2023	Sep 2023	, 	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		IL05966147	IL05815168	
Sample Date		Client Info		23 Sep 2023	30 Mar 2023	
Machine Age	mls	Client Info		83562	42553	
Oil Age	mls	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATION	٧	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Glycol		WC Method		NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	25	38	
Chromium	ppm	ASTM D5185m	>20	2	1	
Nickel	ppm	ASTM D5185m	>4	<1	0	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m	>3	0	0	
Aluminum	ppm	ASTM D5185m	>20	15	6	
Lead	ppm	ASTM D5185m	>40	<1	0	
Copper	ppm	ASTM D5185m		3	8	
Tin	ppm	ASTM D5185m	>15	<1	0	
Vanadium	ppm	ASTM D5185m	710	0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	nnm	ASTM D5185m	250	95	91	
Barium	ppm	ASTM D5185m	10	0	0	
Molybdenum	ppm	ASTM D5185m	100	82	78	
Manganese	ppm	ASTM D5185m	100	2	2	
Magnesium	ppm	ASTM D5185m	450	777	618	
Calcium	ppm	ASTM D5185m	3000	1472	1413	
Phosphorus	ppm	ASTM D5185m	1150	963	831	
Zinc	ppm	ASTM D5185m	1350	1192	1155	
Sulfur	ppm	ASTM D5185m	4250	3056	2969	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	10	10	
Sodium	ppm	ASTM D5185m	>216	7	3	
Potassium	ppm	ASTM D5185m	>20	36	11	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.4	
Nitration	Abs/cm	*ASTM D7624	>20	9.6	10.4	
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.4	24.4	
FLUID DEGRADA	TION _	method	limit/base	current	history1	history2
	Abs/.1mm	*ASTM D7414		19.4		
Oxidation			>25		22.3	
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.3	6.0	



OIL ANALYSIS REPORT

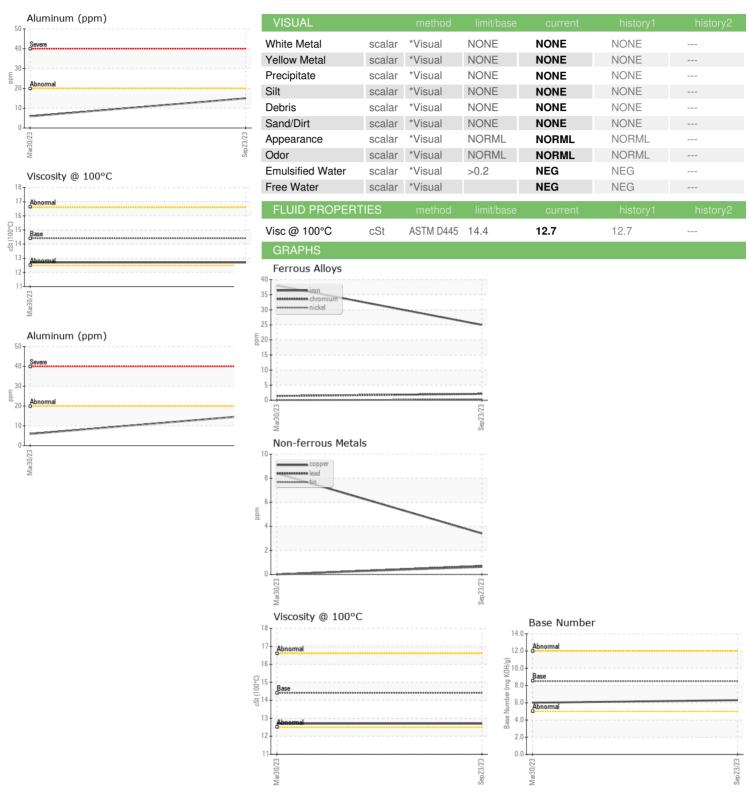





Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: IL05966147 : 05966147 : 10672698 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 02 Oct 2023 Diagnosed : 03 Oct 2023

: Wes Davis Diagnostician

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TAMPA IDEALEASE 5951 ORIENT ROAD TAMPA, FL

US 33610-9565 Contact: Russ Cook russcook@idealease.com

> T: (813)626-9285 F: (844)270-1356