




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

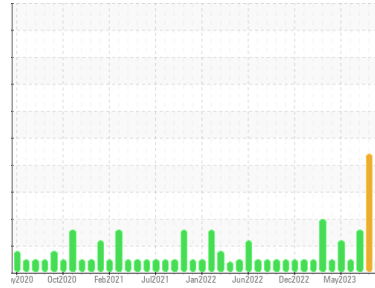

Area
CRM64 - HYDRAULIC
 Machine Id
CRM 64 LOW PRESSURE (S/N 16-2300-1015)
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (793 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	RP0038591	RP0038438	RP0035036
Sample Date	Client Info	29 Sep 2023	29 Aug 2023	07 Jul 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	SEVERE	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	0	0
Chromium	ppm	ASTM D5185m >20	0	0
Nickel	ppm	ASTM D5185m >20	<1	0
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m	0	<1
Aluminum	ppm	ASTM D5185m >20	0	<1
Lead	ppm	ASTM D5185m >20	0	0
Copper	ppm	ASTM D5185m >20	0	0
Tin	ppm	ASTM D5185m >20	0	<1
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	0	0
Barium	ppm	ASTM D5185m 5	0	0
Molybdenum	ppm	ASTM D5185m 5	0	0
Manganese	ppm	ASTM D5185m	0	<1
Magnesium	ppm	ASTM D5185m 25	<1	0
Calcium	ppm	ASTM D5185m 200	45	44
Phosphorus	ppm	ASTM D5185m 300	334	336
Zinc	ppm	ASTM D5185m 370	459	415

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	2	1
Sodium	ppm	ASTM D5185m	0	0
Potassium	ppm	ASTM D5185m >20	<1	0
Water	%	ASTM D6304 >0.05	0.004	0.002
ppm Water	ppm	ASTM D6304 >500	40.6	21.5






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >640	308	5196	1400
Particles >6µm	ASTM D7647 >160	75	1614	457
Particles >14µm	ASTM D7647 >20	7	51	36
Particles >21µm	ASTM D7647 >4	2	9	6
Particles >38µm	ASTM D7647 >3	0	0	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >16/14/11	15/13/10	20/18/13	18/16/12

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.39	0.41


OIL ANALYSIS REPORT

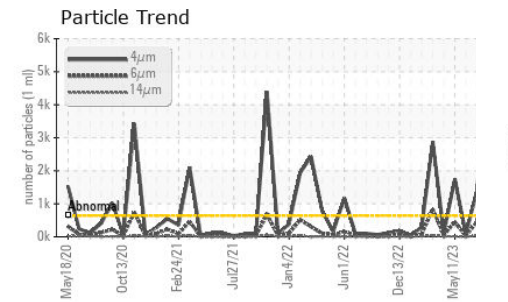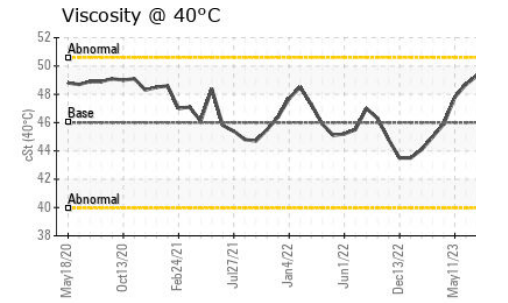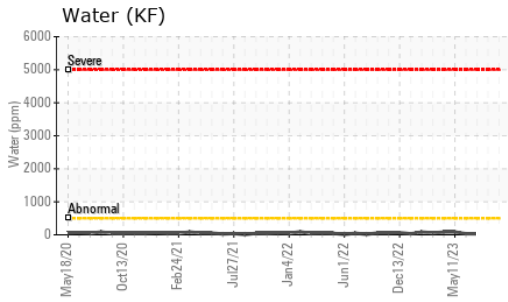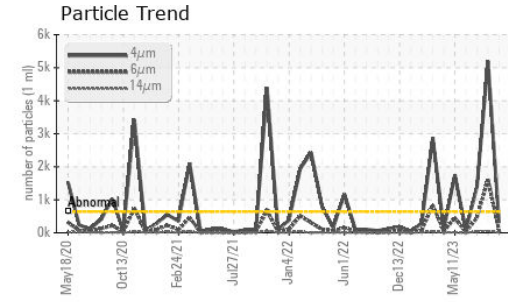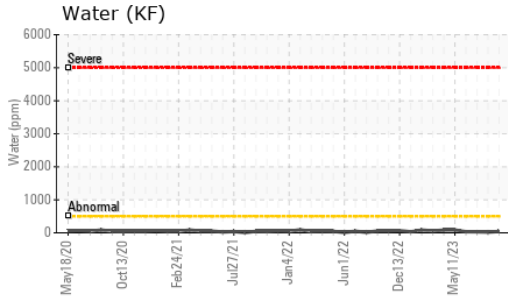






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46	49.4	50.1	49.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

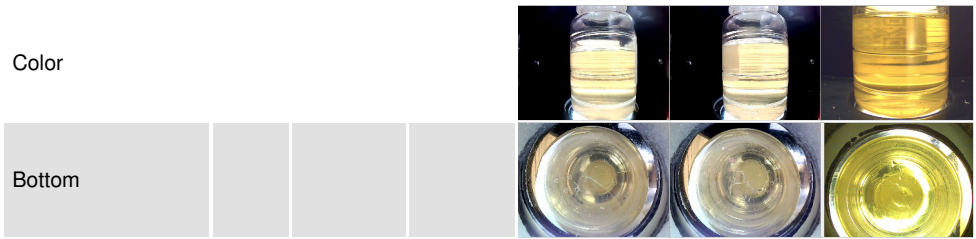

GRAPHS

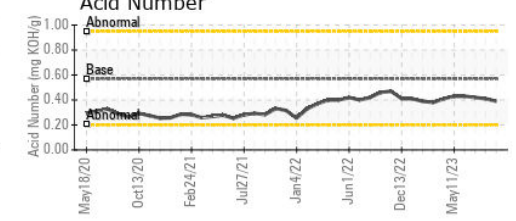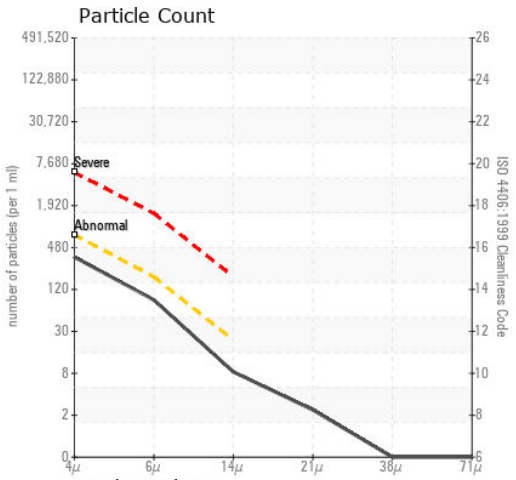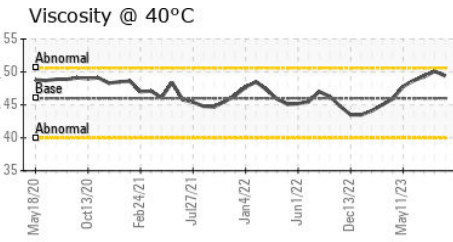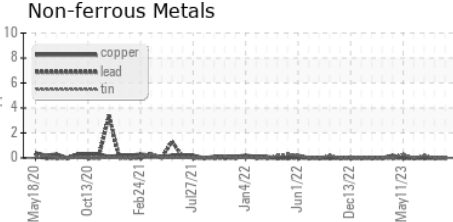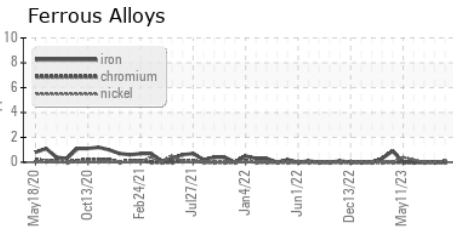

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0038591 **Received** : 02 Oct 2023
Lab Number : 05966295 **Diagnosed** : 03 Oct 2023
Unique Number : 10672846 **Diagnostician** : Wes Davis
Test Package : IND 2

OUTOKUMPU STAINLESS USA
 HWY 43 N
 CALVERT, AL
 US 36513
 Contact: MARIO JOHNSON
 Mario.johnson@outokumpu.com
 T: (251)321-4105
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)