

PROBLEM SUMMARY

Sample Rating Trend

WATER

Machine Id


KAESER SM-15 6370619 (S/N 1124)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

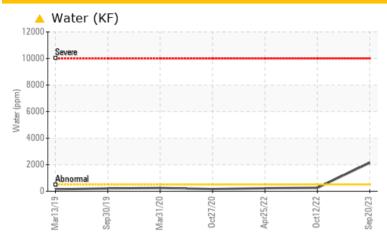

RECOMMENDATION

We were unable to perform a particle count on this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL	ABNORMAL	ATTENTION		
Water	%	ASTM D6304	>0.05	△ 0.215	0.026	0.022		
ppm Water	ppm	ASTM D6304	>500	2150	261.1	228.0		

Customer Id: TEDNEW Sample No.: KC101747 Lab Number: 05966305 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Alert			?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

HISTORICAL DIAGNOSIS

12 Oct 2022 Diag: Don Baldridge





No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



25 Apr 2022 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



27 Oct 2020 Diag: Angela Borella

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid.





OIL ANALYSIS REPORT

Sample Rating Trend

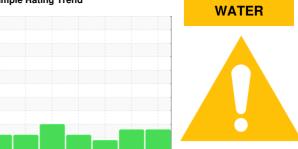

Machine Id

KAESER SM-15 6370619 (S/N 1124)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

We were unable to perform a particle count on this sample. We advise that you stop the unit and follow the water drain-off procedure for this component. We recommend an early resample in 500 hours to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil


Fluid Condition

The AN level is acceptable for this fluid.

		Mar2019	SEPZOTO MIRZOZO	Oct2020 Apr2022 Oct2022	Sep2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC101747	KC102938	KC94998
Sample Date		Client Info		20 Sep 2023	12 Oct 2022	25 Apr 2022
Machine Age	hrs	Client Info		21351	17288	15728
Oil Age	hrs	Client Info		4100	1500	3228
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	6	4	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	0	7	33
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	46	72	44
Calcium	ppm	ASTM D5185m	2	<1	<1	1
Phosphorus	ppm	ASTM D5185m		1	4	13
Zinc	ppm	ASTM D5185m		0	6	0
CONTAMINANTS	,	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		9	19	2
Potassium	ppm	ASTM D5185m	>20	2	4	0
Water	%	ASTM D6304	>0.05	<u> </u>	0.026	0.022
ppm Water	ppm	ASTM D6304	>500	<u>^</u> 2150	261.1	228.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647			21317	3908
Particles >6µm		ASTM D7647	>1300		<u>▲</u> 6473	962
Particles >14µm		ASTM D7647	>80		<u></u> 504	▲ 87
Particles >21µm		ASTM D7647	>20		<u>▲</u> 81	<u>^</u> 25
Particles >38µm		ASTM D7647	>4		4	1
Particles >71µm		ASTM D7647	>3		0	0
Oil Cleanliness		ISO 4406 (c)	>17/13		△ 20/16	▲ 17/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.31	0.35	0.43



OIL ANALYSIS REPORT

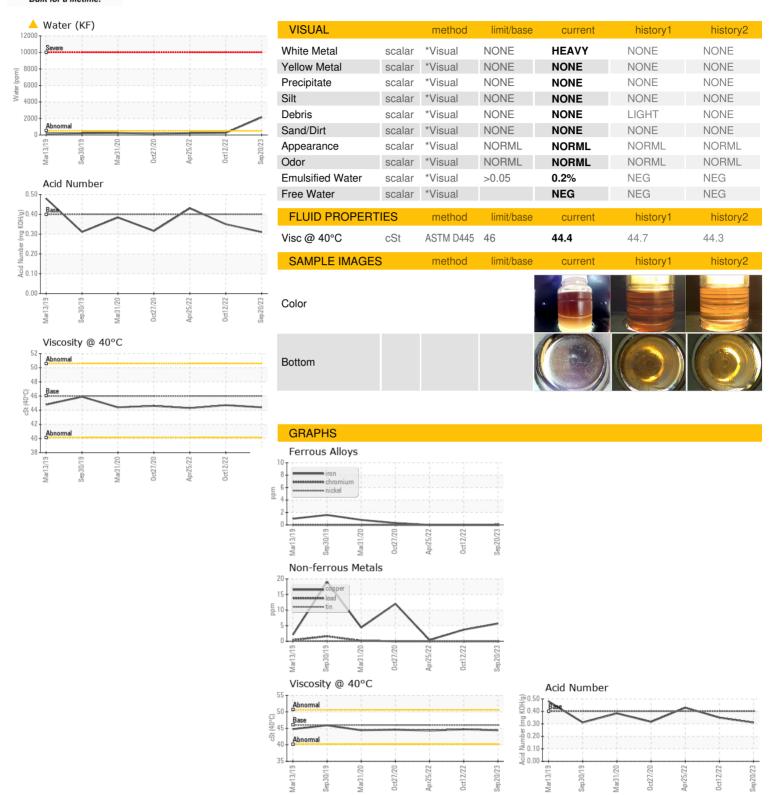





Laboratory Sample No. Lab Number **Unique Number**

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 05966305

: KC101747 : 10672856

Received Diagnosed

: 03 Oct 2023 Diagnostician : Don Baldridge

: 02 Oct 2023

NEW ROCHELLE, NY US 10801

Contact: Service Manager

Test Package : IND 2 Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F:

TEDESCO

320 MAIN ST