


# **PROBLEM SUMMARY**

# Sample Rating Trend ISO

### Machine Id 8033715 (S/N 1492) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

## COMPONENT CONDITION SUMMARY

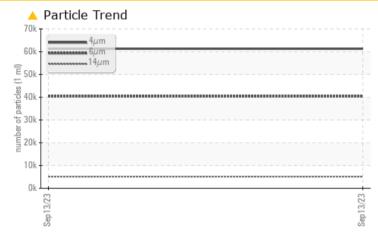

### RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

# PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	 
Particles >6µm	ASTM D7647	>1300	<u> </u>	 
Particles >14µm	ASTM D7647	>80	<b>6</b> 5130	 
Particles >21µm	ASTM D7647	>20	<u> </u>	 
Particles >38µm	ASTM D7647	>4	<mark>/</mark> 9	 
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u> </u>	 

Customer Id: CHAANDCA Sample No.: KCP40093D Lab Number: 05966314 Test Package: IND 2



To manage this report scan the QR code

*To discuss the diagnosis or test data:* Don Baldridge +1 <u>don.b505@comcast.net</u>

*To change component or sample information:* Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS



# **OIL ANALYSIS REPORT**



ISO

### Machine Id 8033715 (S/N 1492) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

### DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.


### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCP40093D		
Sample Date		Client Info		13 Sep 2023		
Machine Age	hrs	Client Info		457		
Oil Age	hrs	Client Info		475		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	۲ ۲		
Titanium	ppm	ASTM D5185m	>3	0		
Silver		ASTM D5185m	>2	0		
	ppm			-		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	4		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	8		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	69		
Calcium	ppm	ASTM D5185m	0	3		
Phosphorus	ppm	ASTM D5185m	0	2		
Zinc	ppm	ASTM D5185m	0	10		
Sulfur	ppm	ASTM D5185m	23500	20414		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		13		
Potassium	ppm	ASTM D5185m	>20	2		
	ppiii					
	0/_	ASTM D6304	<u>\0 05</u>			
Water	% ppm	ASTM D6304 ASTM D6304		0.021		
Water	ppm	ASTM D6304 ASTM D6304 method	>500	0.021 216.6		
Water ppm Water FLUID CLEANLIN	ppm	ASTM D6304 method		0.021 216.6 current		  history2
Water ppm Water FLUID CLEANLIN Particles >4µm	ppm	ASTM D6304 method ASTM D7647	>500 limit/base	0.021 216.6 current 61313	 history1 	 history2 
Water ppm Water FLUID CLEANLIN Particles >4μm Particles >6μm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647	>500 limit/base >1300	0.021 216.6 current 61313 ▲ 40396	 history1 	 history2 
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>500 limit/base >1300 >80	0.021 216.6 current 61313 ▲ 40396 ▲ 5130	 history1  	 history2  
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647	>500 limit/base >1300 >80 >20	0.021 216.6 current 61313 ▲ 40396 ▲ 5130 ▲ 482	 history1  	 history2  
Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>500 limit/base >1300 >80 >20 >4	0.021 216.6 current 61313 ▲ 40396 ▲ 5130 ▲ 482 ▲ 9	 history1   	 history2   
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>500 limit/base >1300 >80 >20 >4 >3	0.021 216.6 current 61313 ▲ 40396 ▲ 5130 ▲ 482 ▲ 9 1	 history1    	 history2    
Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>500 limit/base >1300 >80 >20 >4	0.021 216.6 current 61313 ▲ 40396 ▲ 5130 ▲ 482 ▲ 9	 history1   	 history2  
Water opm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ESS	ASTM D6304 method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>500 limit/base >1300 >80 >20 >4 >3	0.021 216.6 current 61313 ▲ 40396 ▲ 5130 ▲ 482 ▲ 9 1	 history1    	 history2    




# OIL ANALYSIS REPORT

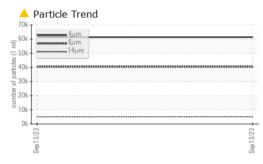

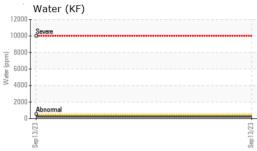

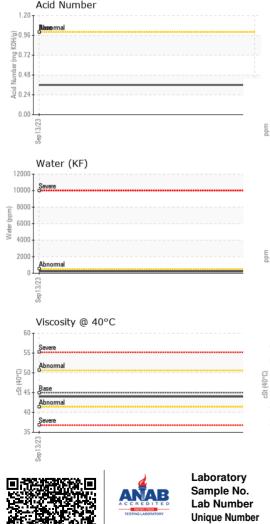

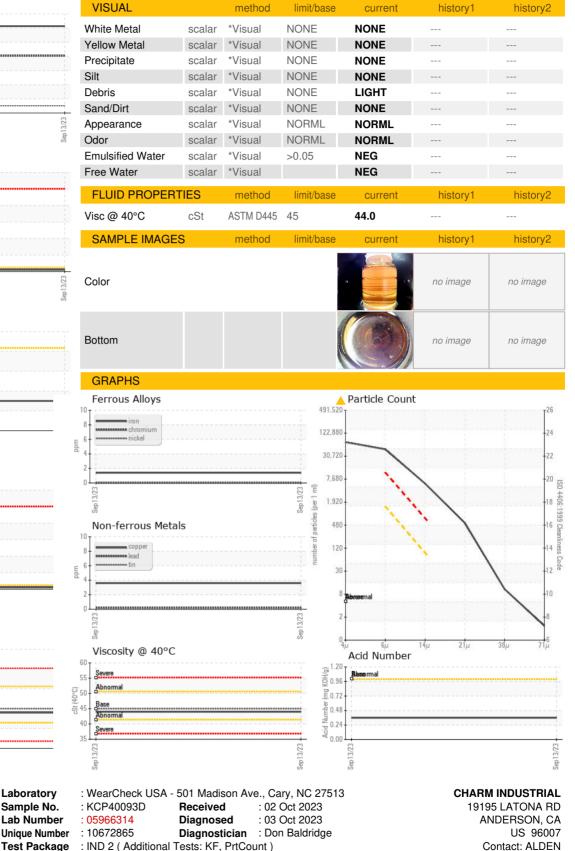

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Certificate L2367

alden@charmindustrial.com

T:

F: