

PROBLEM SUMMARY

Sample Rating Trend



Machine Id


KAESER ASD 25T 3130336 (S/N 1136)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

COMPONENT CONDITION SUMMARY

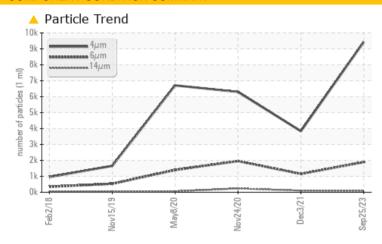

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ATTENTION	ATTENTION	ABNORMAL				
Particles >6µm	ASTM D7647 >	>1300	<u> </u>	1151	<u>▲</u> 1957				
Particles >14µm	ASTM D7647 >	>80	<u> </u>	<u>103</u>	<u>^</u> 239				
Oil Cleanliness	ISO 4406 (c) >	>/17/13	<u>^</u> 20/18/14	1 7/14	△ 18/15				

Customer Id: IMACLI Sample No.: KC125907 Lab Number: 05966317 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

03 Dec 2021 Diag: Jonathan Hester

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



24 Nov 2020 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



08 May 2020 Diag: Angela Borella

ISO




The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend

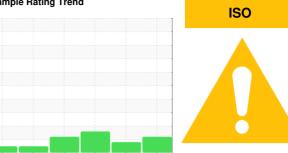

KAESER ASD 25T 3130336 (S/N 1136)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Feb 2018	Nov2019 May2020	Nov2020 Dec2021	Sep2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC125907	KC95074	KC91275
Sample Date		Client Info		25 Sep 2023	03 Dec 2021	24 Nov 2020
Machine Age	hrs	Client Info		69527	61174	56528
Oil Age	hrs	Client Info		0	4646	4642
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	<1	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	35	21	24
Tin	ppm	ASTM D5185m	>10	0	0	<1
Antimony	ppm	ASTM D5185m			<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	11	11
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	<1	6	2
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	5	0
Zinc	ppm	ASTM D5185m		92	115	99
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	2	<1
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water	%	ASTM D6304	>0.05	0.007	0.004	0.007
ppm Water	ppm	ASTM D6304	>500	77.9	43.5	71.4
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		9431	3833	6296
Particles >6µm		ASTM D7647	>1300	1890	1151	<u>▲</u> 1957
Particles >14µm		ASTM D7647	>80	<u>^</u> 87	<u> </u>	<u>^</u> 239
Particles >21µm		ASTM D7647	>20	18	<u>^</u> 28	<u>^</u> 79
Particles >38µm		ASTM D7647	>4	1	0	<u>^</u> 6
Particles >71µm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/18/14	▲ 17/14	▲ 18/15
	TION	method	limit/base		history1	history2
FLUID DEGRADA				current	HISTORY	

Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.455

0.38

0.396



OIL ANALYSIS REPORT





Certificate L2367

Sample No. Lab Number **Unique Number**

: KC125907 : 05966317 : 10672868 Test Package : IND 2

Received Diagnosed Diagnostician

: 03 Oct 2023 : Don Baldridge

CLIFTON, NJ US 07011 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: