


PROBLEM SUMMARY

KAESER DSD175 6381825 (S/N 1031)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

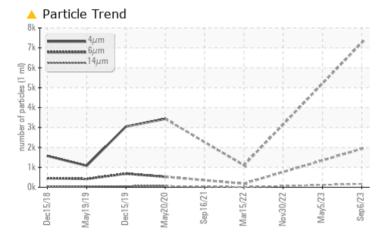

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | |
|--------------------------|--------------|---------|------------------|----------|----------|--|--|
| Sample Status | | | ABNORMAL | ABNORMAL | ABNORMAL | | |
| Particles >6µm | ASTM D7647 | >1300 | <u> </u> | | | | |
| Particles >14µm | ASTM D7647 | >80 | 170 | | | | |
| Particles >21µm | ASTM D7647 | >20 | <u> </u> | | | | |
| Oil Cleanliness | ISO 4406 (c) | >/17/13 | 20/18/15 | | | | |


Customer Id: ASHASHPA Sample No.: KC124279 Lab Number: 05966332 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

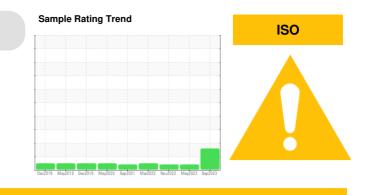

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS





No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



30 Nov 2022 Diag: Don Baldridge



15 Mar 2022 Diag: Jonathan Hester

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.





Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

KAESER DSD175 6381825 (S/N 1031)

Compressor Fluid

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

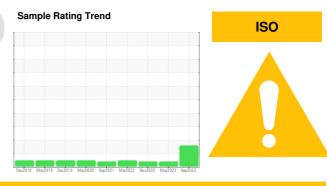



| SAMPLE INFORM | ATION | method | limit/base | current | history1 | history2 |
|------------------|----------|--------------|------------|-------------------|-------------|-------------|
| Sample Number | | Client Info | | KC124279 | KC102158 | KC103131 |
| Sample Date | | Client Info | | 06 Sep 2023 | 05 May 2023 | 30 Nov 2022 |
| Machine Age | hrs | Client Info | | 28938 | 27119 | 24411 |
| Oil Age | hrs | Client Info | | 0 | 7149 | 4441 |
| Oil Changed | | Client Info | | N/A | Changed | Not Changd |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >50 | 0 | 0 | 0 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | <1 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Lead | ppm | | >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | | 7 | 9 | 13 |
| Tin | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | I- I- | method | limit/base | current | history1 | history2 |
| Boron | nom | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 90 | 0 | 0 | 0 |
| | ppm | ASTM D5185m | 90 | 0 | <1 | 0 |
| Molybdenum | ppm | | | 0 | | 0 |
| Manganese | ppm | ASTM D5185m | 00 | - | <1 3 | <1 |
| Magnesium | ppm | ASTM D5185m | 90 | 2 0 | 0 | |
| Calcium | ppm | ASTM D5185m | 2 | | | 0 |
| Phosphorus | ppm | ASTM D5185m | | 0 | <1 | |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | 0 |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >25 | 0 | 0 | <1 |
| Sodium | ppm | ASTM D5185m | | 0 | <1 | 2 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | <1 | 0 |
| Water | % | ASTM D6304 | >0.05 | 0.003 | 0.006 | 0.011 |
| ppm Water | ppm | ASTM D6304 | >500 | 29.9 | 62.3 | 112.3 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | | 7258 | | |
| Particles >6µm | | ASTM D7647 | >1300 | <u> </u> | | |
| Particles >14µm | | ASTM D7647 | >80 | <u> </u> | | |
| Particles >21µm | | ASTM D7647 | >20 | <u> </u> | | |
| Particles >38µm | | ASTM D7647 | >4 | 3 | | |
| Particles >71µm | | ASTM D7647 | >3 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | A 20/18/15 | | |
| FLUID DEGRADA | TION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.4 | 0.39 | 0.46 | 0.54 |

2 1 COMPRESSOR Built for a lifetime.

OIL ANALYSIS REPORT

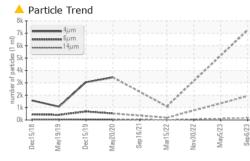


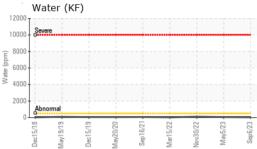

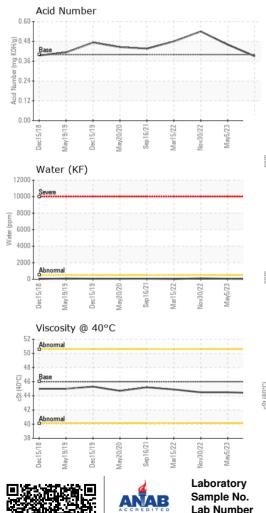


| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|-----------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | 🔺 MODER | 🔺 MODER |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | IES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 46 | 44.4 | 44.5 | 44.5 |
| SAMPLE IMAGES | S | method | limit/base | current | history1 | history2 |
| | | | | | | |





Bottom

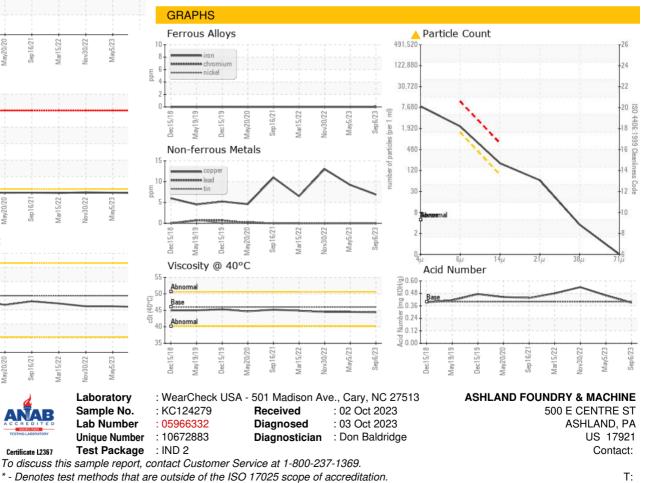

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - ASHASHPA

F: