

PROBLEM SUMMARY

Sample Rating Trend


WATER

CF6202 (S/N 00881-003-1-01-01)

Component **Gearbox**

MOBIL GLYGOYLE 100 (--- GAL)

COMPONENT CONDITION SUMMARY

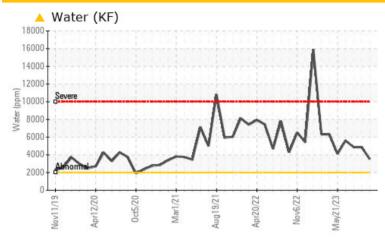

RECOMMENDATION

We advise that you check for the source of water entry. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status				ATTENTION	ATTENTION	ATTENTION	
Water	%	ASTM D6304	>0.2	△ 0.352	△ 0.486	△ 0.487	
ppm Water	ppm	ASTM D6304	>2000	3520	4860	4870	

Customer Id: FLIFAI Sample No.: USP0001760 Lab Number: 05966367 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Check Water Access			?	We advise that you check for the source of water entry.

HISTORICAL DIAGNOSIS

23 Aug 2023 Diag: Doug Bogart

WATER



We advise that you check for the source of water entry. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



13 Aug 2023 Diag: Doug Bogart

WAIER



We advise that you check for the source of water entry. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



22 Jun 2023 Diag: Doug Bogart

WATER



We advise that you check for the source of water entry. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate concentration of water present in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

CF6202 (S/N 00881-003-1-01-01)

Component

Gearbox

MOBIL GLYGOYLE 100 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of water entry. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SIS NEPUN I	***********			
J.J				11111
1-01)				
	111111		arlininin <mark>i</mark> n	1111
		<u> </u>		
	v2019 Apr2020	Oct2020 Mar2021 Aug 202	1 Apr2022 Nov2022 May	2023
SAMPLE INFORMATION	method	limit/base	current	hi

Sample Number		Client Info		USP0001760	USP0000416	USP246090
Sample Date		Client Info		01 Oct 2023	23 Aug 2023	13 Aug 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ATTENTION	ATTENTION
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	1	2	3
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	<1	0	<1
Lead	ppm	ASTM D5185m	>100	<1	0	0
Copper	ppm	ASTM D5185m	>200	0	<1	<1
Tin	ppm	ASTM D5185m	>25	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		0	2	7
Calcium	ppm	ASTM D5185m		0	4	8
Phosphorus	ppm	ASTM D5185m		632	570	541
Zinc	ppm	ASTM D5185m		0	5	16
Sulfur	ppm	ASTM D5185m		865	888	866
CONTAMINANTS	1	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<1	<1	<1
Sodium	ppm	ASTM D5185m		0	3	2
Potassium	ppm	ASTM D5185m	>20	4	2	3
Water	%	ASTM D6304	>0.2	△ 0.352	△ 0.486	△ 0.487
ppm Water	ppm	ASTM D6304	>2000	△ 3520	4860	4870
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647	>20000	6258	5093	5240
Particles >6µm		ASTM D7647	>5000	1633	1393	1404
Particles >14μm		ASTM D7647	>640	100	91	118
Particles >21µm		ASTM D7647	>160	30	19	35
Particles >38μm		ASTM D7647	>40	3	2	1
Particles >71μm		ASTM D7647	>10	1	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/18/14	20/18/14	20/18/14
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.23	0.20	0.26



OIL ANALYSIS REPORT

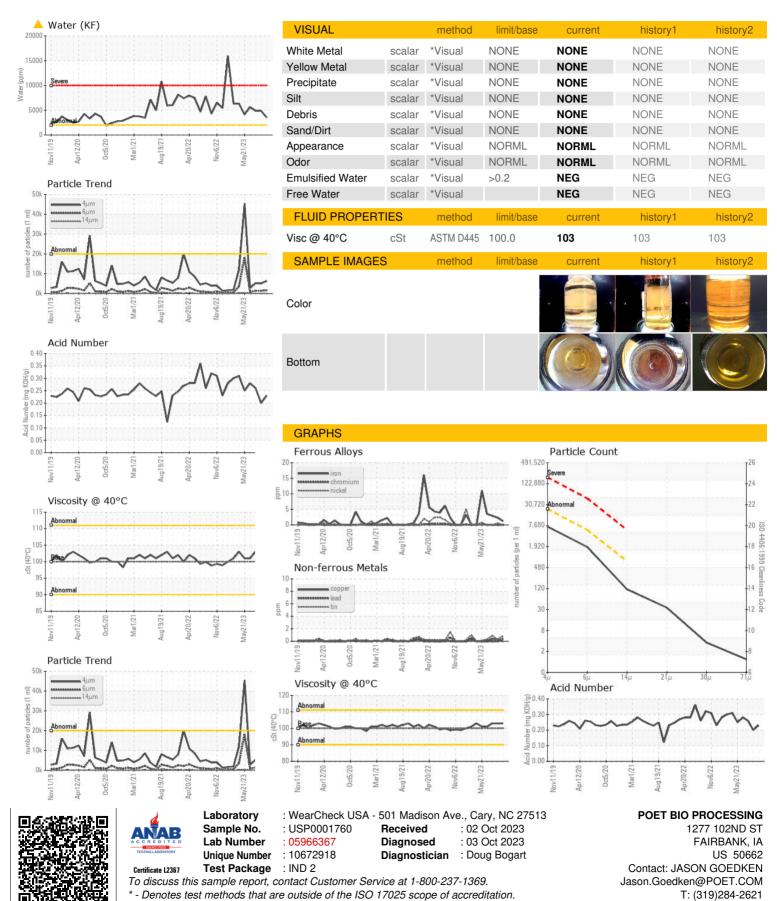

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

T: (319)284-2621