



# PROBLEM SUMMARY


Sample Rating Trend

**WATER**

Area  
**SULLUBE**  
Machine Id  
**SULLAIR 200809270052 - EPSILYTE J-ACP-A/PACK WAREHOUSE**  
Component  
**Compressor**



## COMPONENT CONDITION SUMMARY

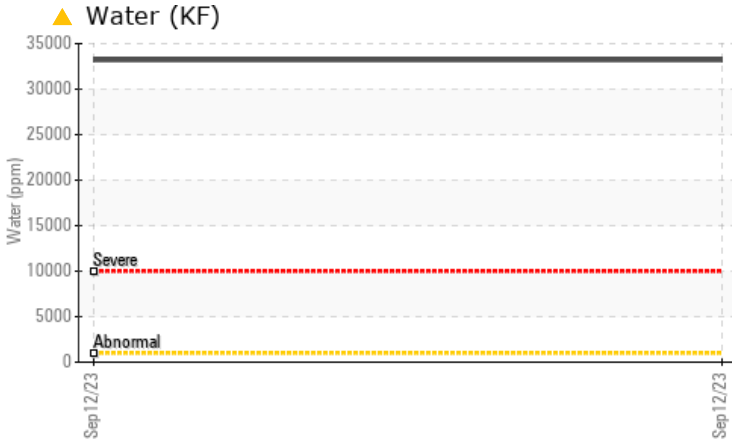

## RECOMMENDATION

We advise that you follow the water drain-off procedure for this component. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				ATTENTION	---	---
Water	%	ASTM D6304	>0.1	▲ 3.32	---	---
ppm Water	ppm	ASTM D6304	>1000	▲ 33200	---	---
Emulsified Water	scalar	*Visual	>0.1	▲ 0.2%	---	---

Customer Id: UCHTESTL  
Sample No.: UCH05966462  
Lab Number: 05966462  
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Water Drain-off	---	---	?	We advise that you follow the water drain-off procedure for this component.
Resample	---	---	?	We recommend an early resample to monitor this condition.


## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

**WATER**

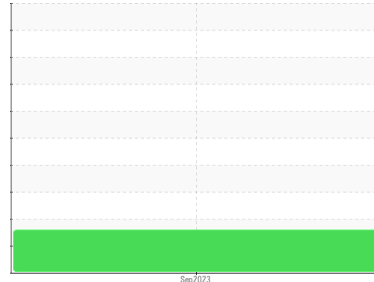

Area  
**SULLUBE**  
 Machine Id  
**SULLAIR 200809270052 - EPSILYTE J-ACP-A/PACK WAREHOUSE**  
 Component  
**Compressor**

## DIAGNOSIS

### ▲ Recommendation

We advise that you follow the water drain-off procedure for this component. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### ▲ Contamination

Moderate concentration of visible dirt/debris present in the oil. There is a high concentration of water present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>UCH05966462</b>	---	---
Sample Date	Client Info			<b>12 Sep 2023</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>ATTENTION</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>4</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m		<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185m	745	<b>392</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m	1	<b>2</b>	---	---
Phosphorus	ppm	ASTM D5185m	3	<b>7</b>	---	---
Zinc	ppm	ASTM D5185m	0.1	<b>0</b>	---	---
Sulfur	ppm	ASTM D5185m	240	<b>227</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>1</b>	---	---
Sodium	ppm	ASTM D5185m		<b>20</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water	%	ASTM D6304	>0.1	<b>▲ 3.32</b>	---	---
ppm Water	ppm	ASTM D6304	>1000	<b>▲ 33200</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	.06	<b>0.12</b>	---	---



# OIL ANALYSIS REPORT

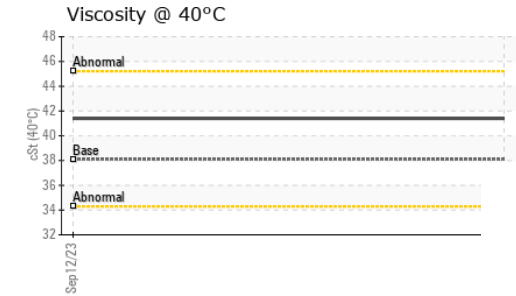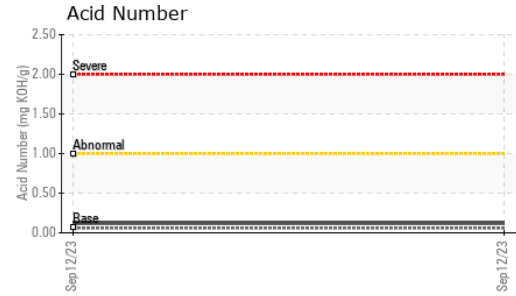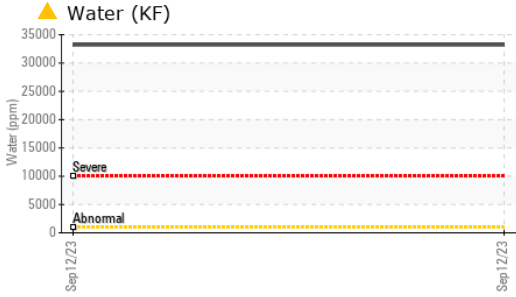





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	▲ 0.2%	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	38.1	41.4	---	---

### SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

### GRAPHS

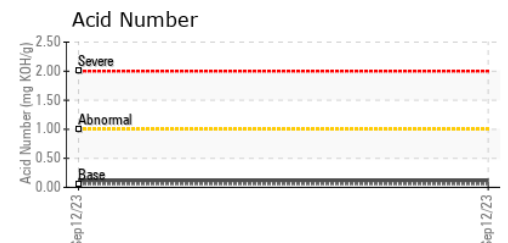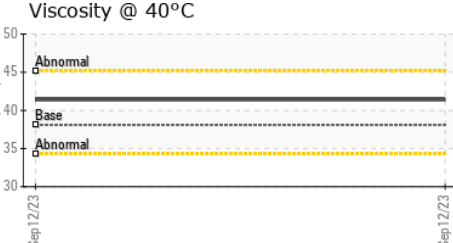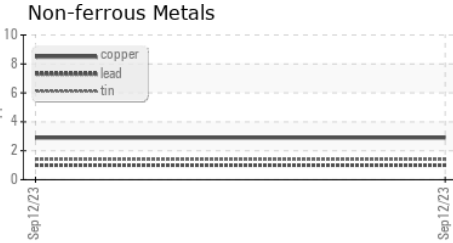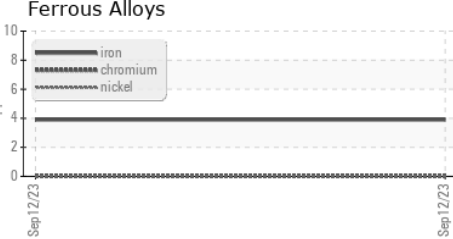

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCH05966462 **Received** : 02 Oct 2023  
**Lab Number** : 05966462 **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10673013 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF )

**HTE TECHNOLOGIES**  
 2021 CONGRESSIONAL DR  
 ST LOUIS, MO  
 US 63146  
 Contact: DON RIDDELL  
 don.riddell@htetech.com  
 T:  
 F: (314)731-4424

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)