

FUEL REPORT

[CP29159] Machine Id T3Y00201 - DELIVERY TRUCK

Diesel Fuel

DIESEL FUEL No. 2 (--- QTS)

Sample Rating Trend NO



DIAGNOSIS

Recommendation

ASTM D0482, D5452, and D6079 performed at subcontracted ISO 17025 laboratory. All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel. The amount and size of particulates present in the system are acceptable.


Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

				Sep2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0863784		
Sample Date		Client Info		22 Sep 2023		
Machine Age	hrs	Client Info		0		
Sample Status				NORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Specific Gravity		*ASTM D1298		0.840		
Fuel Color	text	*Visual Screen		Red		
ASTM Color	scalar	*ASTM D1500		L4.0		
Visc @ 40°C	cSt	ASTM D445	4.1	2.43		
Pensky-Martens Flash Point	°C	*PMCC Calculated		58		
SULFUR CONTE	NΤ	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m		2		
Sulfur (UVF)	ppm	ASTM D5453		10		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86		163		
5% Distillation Point	°C	ASTM D86		189		
10% Distill Point	°C	ASTM D86		201		
15% Distillation Point	°C	ASTM D86		211		
20% Distill Point	°C	ASTM D86		218		
30% Distill Point	°C	ASTM D86		232		
40% Distill Point	°C	ASTM D86		247		
50% Distill Point	°C	ASTM D86		260		
60% Distill Point	°C	ASTM D86		274		
70% Distill Point	°C	ASTM D86		289		
80% Distill Point	°C	ASTM D86		305		
85% Distillation Point	°C	ASTM D86		314		
90% Distill Point	°C	ASTM D86		326		
95% Distillation Point	°C	ASTM D86		343		
Final Boiling Point	°C	ASTM D86		351		
Distillation Residue Distillation Loss	%	ASTM D86 ASTM D86		1.4 0.9		
IGNITION QUALIT		method	limit/base	current	history1	history2
API Gravity		ASTM D7777	- IIIIII/Dase	37.0		
Cetane Index		ASTM D4737	<40.0	48.6		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	0		
Sodium	ppm	ASTM D5185m	<0.1	0		
Potassium	ppm	ASTM D5185m	<0.1	0		
Water	%	ASTM D6304	<0.05	0.002		
ppm Water	ppm	ASTM D6304	<500	23.4		
% Gasoline	%	*In-House	< 0.50	0.0		
% Biodiesel	%	*In-House	<20.0	0.0		



FUEL REPORT

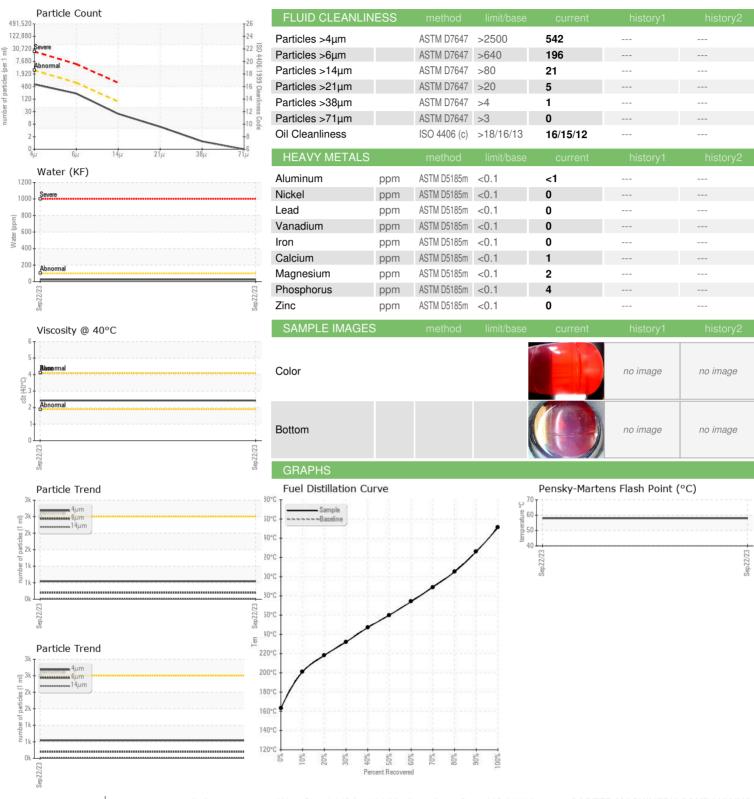



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number**

: WC0863784 : 05966773 : 10673324

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 02 Oct 2023

Diagnosed : 26 Oct 2023 Diagnostician : Doug Bogart

Test Package : DF-2 (Additional Tests: Screen)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CARTER MACHINERY COMPANY INC

1330 LYNCHBURG TURNPIKE

SALEM, VA US 24153

Contact: Gary Wheeler gary_wheeler@cartermachinery.com

T: (540)387-1111

F: (540)387-1814 Contact/Location: Gary Wheeler - CARSALVA