




PROBLEM SUMMARY




Area
OKLAHOMA/109/EG - PAVING EQUIPMENT
 Machine Id
87.93 [OKLAHOMA^109^EG - PAVING EQUIPMENT]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (4 GAL)

Sample Rating Trend

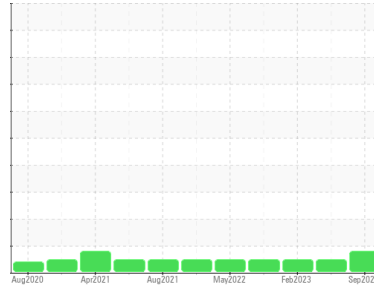

COMPONENT CONDITION SUMMARY

▲ Ferrous Alloys

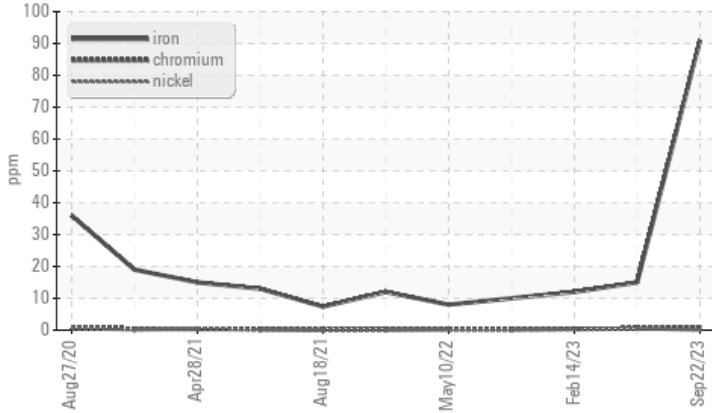

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: 4125 hrs)

PROBLEMATIC TEST RESULTS

Sample Status				MARGINAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185m	>100	▲ 91	15	12

Customer Id: SHEWIC
 Sample No.: WC0819985
 Lab Number: 05966969
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

11 May 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



14 Feb 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



03 Nov 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report






OIL ANALYSIS REPORT



Area
OKLAHOMA/109/EG - PAVING EQUIPMENT
 Machine Id
87.93 [OKLAHOMA^109^EG - PAVING EQUIPMENT]
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (4 GAL)

Sample Rating Trend

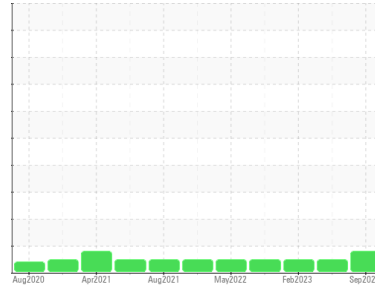

WEAR



DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: 4125 hrs)

▲ Wear

The iron level is marginal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0819985	WC0808042	WC0758715
Sample Date	Client Info		22 Sep 2023	11 May 2023	14 Feb 2023
Machine Age	hrs	Client Info	4125	3592	3052
Oil Age	hrs	Client Info	4125	540	250
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			MARGINAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	▲ 91	15	12
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >2	0	<1	<1
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >25	2	6	3
Lead	ppm	ASTM D5185m >40	<1	0	<1
Copper	ppm	ASTM D5185m >330	2	<1	2
Tin	ppm	ASTM D5185m >15	0	<1	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	36	45	47
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	42	42	43
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 0	522	549	522
Calcium	ppm	ASTM D5185m	1713	1765	1631
Phosphorus	ppm	ASTM D5185m	753	787	738
Zinc	ppm	ASTM D5185m	927	990	929
Sulfur	ppm	ASTM D5185m	2572	3256	2854

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	6	4
Sodium	ppm	ASTM D5185m	5	2	3
Potassium	ppm	ASTM D5185m >20	<1	2	0

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.3	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	7.3	7.7	7.0
Sulfation	Abs.1mm	*ASTM D7415 >30	22.1	22.7	18.6


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs.1mm	*ASTM D7414 >25	20.9	21.4	15.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.4	10.0	10.1	9.8




OIL ANALYSIS REPORT

▲ Ferrous Alloys

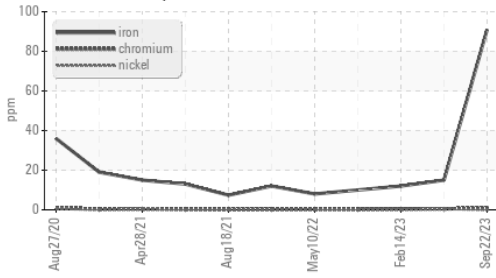

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


Base Number

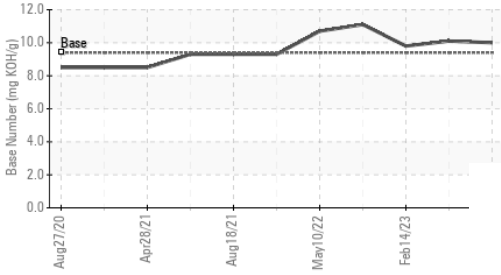


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14	13.2	13.0

GRAPHS


▲ Ferrous Alloys

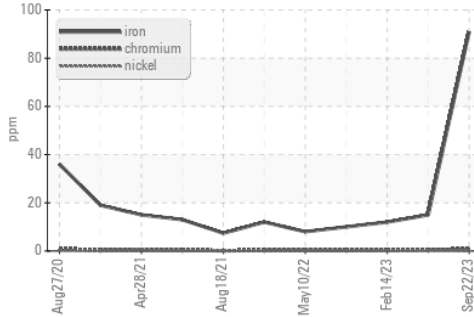


Viscosity @ 100°C

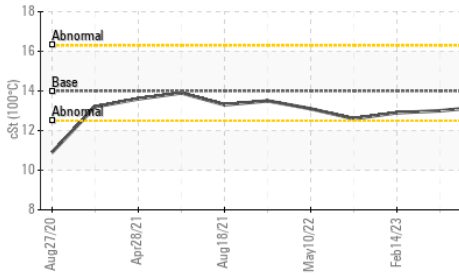


Non-ferrous Metals

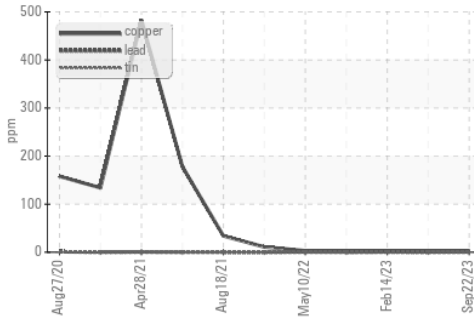

Viscosity @ 100°C

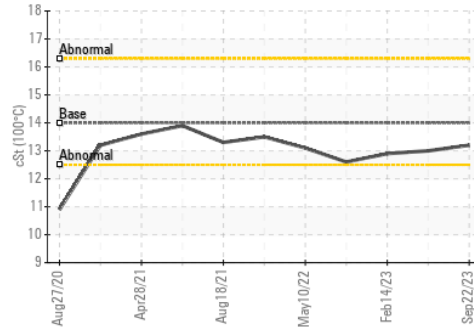

Base Number

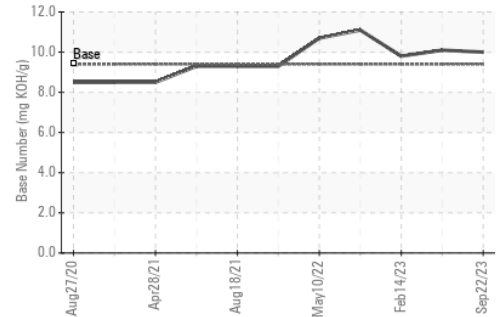

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0819985 **Received** : 02 Oct 2023
Lab Number : 05966969 **Diagnosed** : 04 Oct 2023
Unique Number : 10673520 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: TBN)

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)