




# OIL ANALYSIS REPORT

Sample Rating Trend

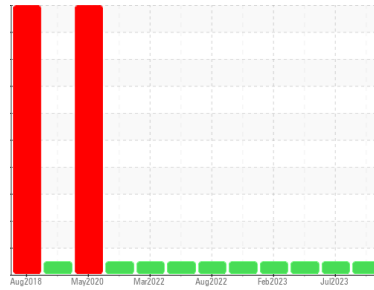

**NORMAL**



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**CHEVROLET GASOLINE 040619**  
 Component  
**Gasoline Engine**  
 Fluid  
**MOBIL SUPER 5W30 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>SBP0004906</b>	SBP0004767	SBP0004442
Sample Date	Client Info			<b>28 Sep 2023</b>	28 Jul 2023	01 Jun 2023
Machine Age	hrs	Client Info		<b>6742</b>	6484	6211
Oil Age	hrs	Client Info		<b>258</b>	273	375
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>24</b>	25	38
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	4	5
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>155	<b>13</b>	11	15
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>26</b>	24	23
Barium	ppm	ASTM D5185m		<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>69</b>	71	67
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>510</b>	482	494
Calcium	ppm	ASTM D5185m		<b>1183</b>	1192	1224
Phosphorus	ppm	ASTM D5185m		<b>643</b>	641	631
Zinc	ppm	ASTM D5185m		<b>772</b>	755	752
Sulfur	ppm	ASTM D5185m		<b>2709</b>	2694	3086



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>13</b>	15	12
Sodium	ppm	ASTM D5185m	>400	<b>2</b>	2	4
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	1	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	10.5	11.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.6</b>	22.0	24.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.9</b>	17.7	20.5
Base Number (BN)	mg KOH/g	ASTM D2896		<b>4.7</b>	4.4	3.4







# OIL ANALYSIS REPORT

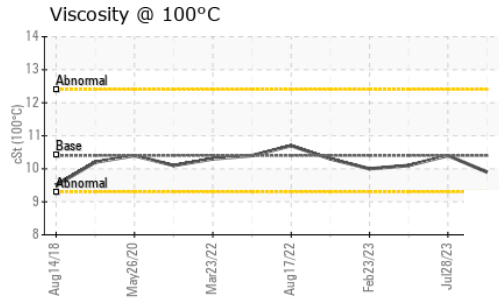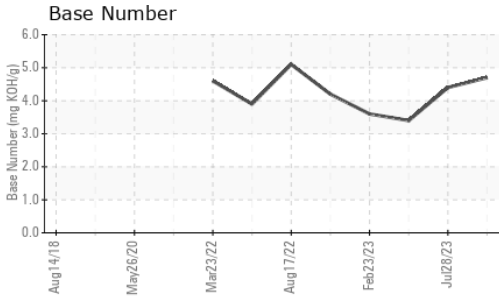

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.4	<b>9.9</b>	10.4	10.1

## GRAPHS

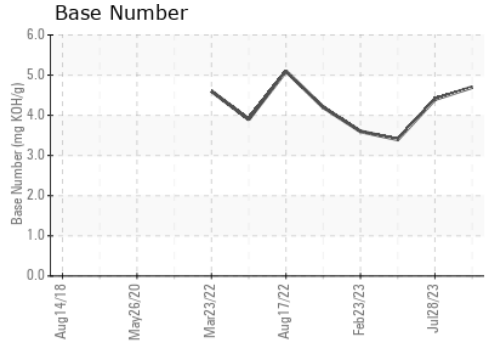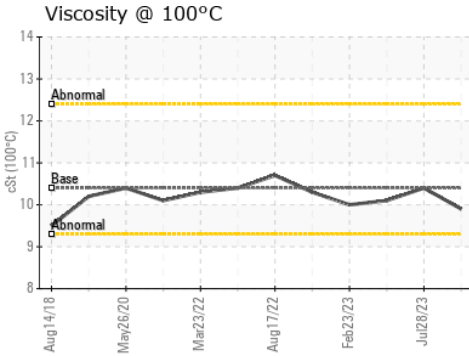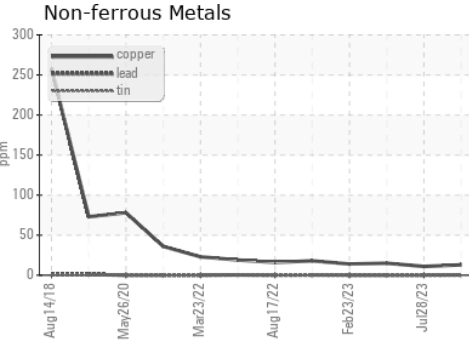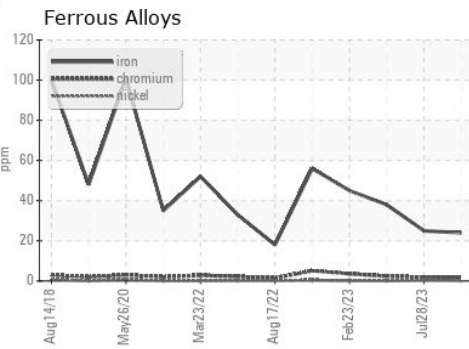

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004906 **Received** : 02 Oct 2023  
**Lab Number** : **05966973** **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10673524 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)