




# OIL ANALYSIS REPORT

Sample Rating Trend

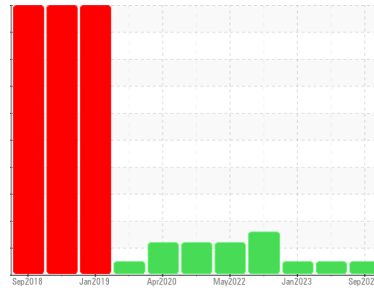

**NORMAL**



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**CHEVROLET GASOLINE 040696**  
 Component  
**Gasoline Engine**  
 Fluid  
**MOBIL MOBIL 1 EXT PERFORMANCE 5W20 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>SBP0004907</b>	SBP0003772	SBP0002254
Sample Date	Client Info	<b>29 Sep 2023</b>	11 May 2023	13 Jan 2023
Machine Age	hrs	<b>4364</b>	4065	3774
Oil Age	hrs	<b>299</b>	291	316
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

**CONTAMINATION**

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

**WEAR METALS**

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >150	<b>17</b>	24	33
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >40	<b>2</b>	<1	5
Lead	ppm ASTM D5185m >50	<b>0</b>	0	<1
Copper	ppm ASTM D5185m >155	<b>&lt;1</b>	<1	1
Tin	ppm ASTM D5185m >10	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>1</b>	1	1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 100	<b>33</b>	32	22
Barium	ppm ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 80	<b>75</b>	67	66
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 800	<b>552</b>	532	444
Calcium	ppm ASTM D5185m 1125	<b>1271</b>	1341	1223
Phosphorus	ppm ASTM D5185m 720	<b>701</b>	703	633
Zinc	ppm ASTM D5185m 790	<b>850</b>	845	766
Sulfur	ppm ASTM D5185m 2100	<b>2805</b>	3004	2300

**CONTAMINANTS**

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>23</b>	12	23
Sodium	ppm ASTM D5185m >400	<b>2</b>	2	3
Potassium	ppm ASTM D5185m >20	<b>0</b>	<1	1

**INFRA-RED**



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm *ASTM D7624 >20	<b>11.8</b>	12.3	13.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>25.9</b>	26.4	28.9

**FLUID DEGRADATION**

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>20.7</b>	20.9	24.5
Base Number (BN)	mg KOH/g ASTM D2896 8.3	<b>3.5</b>	2.9	2.2







# OIL ANALYSIS REPORT

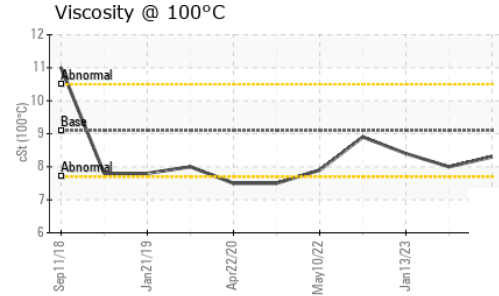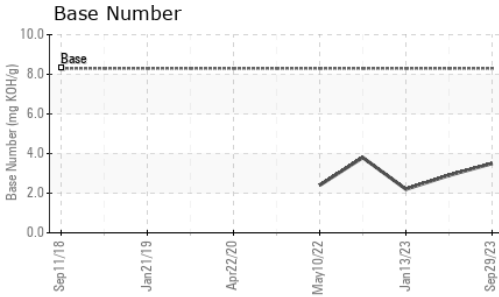

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 9.1	<b>8.3</b>	8	8.4

## GRAPHS

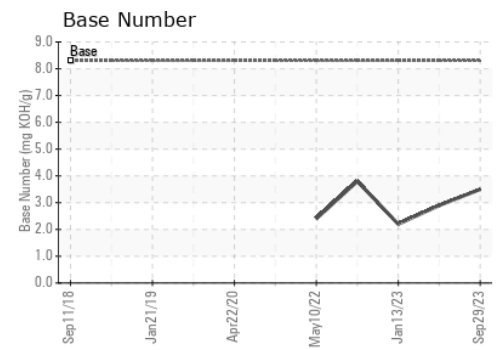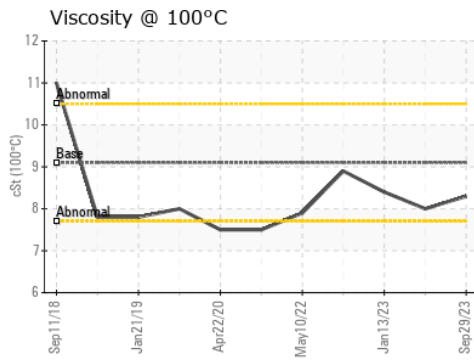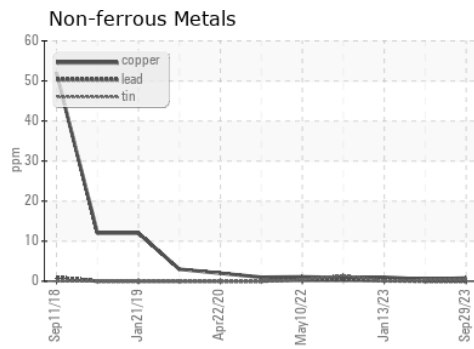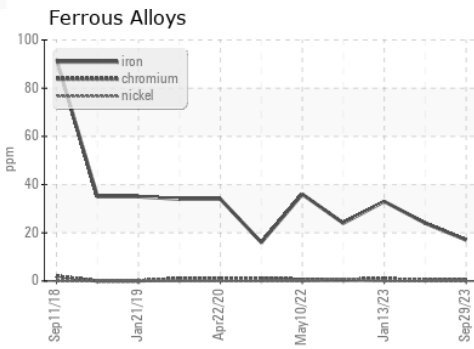

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004907 **Received** : 02 Oct 2023  
**Lab Number** : **05966976** **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10673527 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)