




# OIL ANALYSIS REPORT

Sample Rating Trend

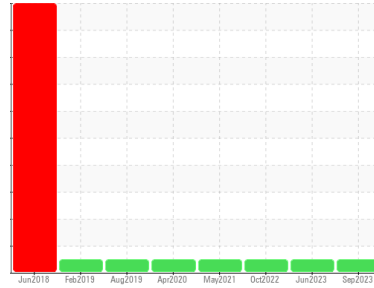

**NORMAL**



Area  
**CONSTRUCTORS, INC**  
 Machine Id  
**CHEVROLET GASOLINE 030345**  
 Component  
**Gasoline Engine**  
 Fluid  
**MOBIL CLEAN 5W30 5000 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0004570</b>	SBP0004480	SBP0002036
Sample Date	Client Info		<b>28 Sep 2023</b>	08 Jun 2023	20 Oct 2022
Machine Age	hrs	Client Info	<b>4538</b>	4253	3563
Oil Age	hrs	Client Info	<b>285</b>	375	309
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	<b>21</b>	46	21
Chromium	ppm	ASTM D5185m >20	<b>2</b>	3	2
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>2</b>	6	4
Lead	ppm	ASTM D5185m >50	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >155	<b>16</b>	20	26
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>27</b>	29	50
Barium	ppm	ASTM D5185m	<b>0</b>	2	<1
Molybdenum	ppm	ASTM D5185m	<b>69</b>	79	70
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>518</b>	481	477
Calcium	ppm	ASTM D5185m	<b>1179</b>	1242	1227
Phosphorus	ppm	ASTM D5185m	<b>639</b>	661	643
Zinc	ppm	ASTM D5185m	<b>775</b>	815	791
Sulfur	ppm	ASTM D5185m	<b>2652</b>	3044	2678

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>12</b>	17	10
Sodium	ppm	ASTM D5185m >400	<b>2</b>	4	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	3
Chlorine	ppm	ASTM D5185m	<b>---</b>	---	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.9</b>	12.1	9.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.0</b>	26.9	21.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.2</b>	24.1	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	<b>4.5</b>	3.8	5.7







# OIL ANALYSIS REPORT

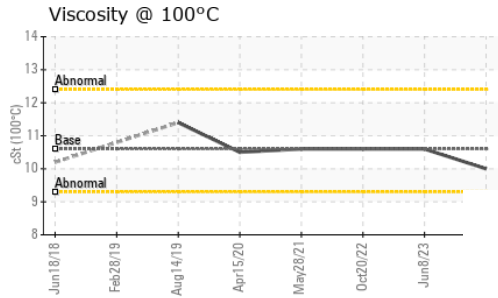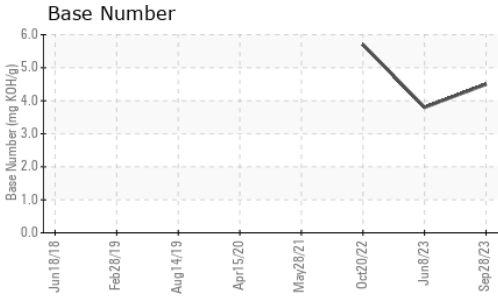

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.6	<b>10.0</b>	10.6

## GRAPHS

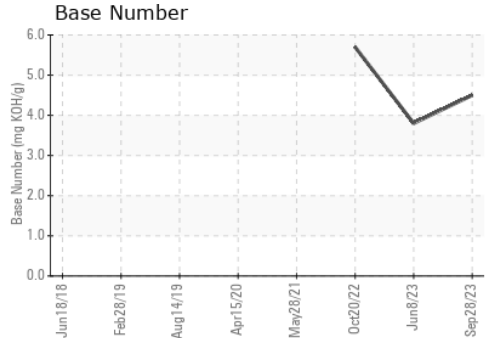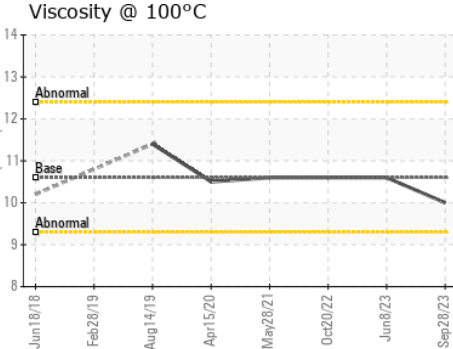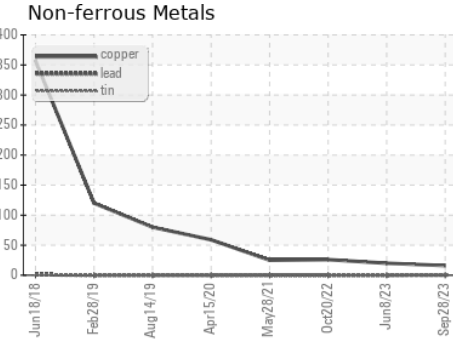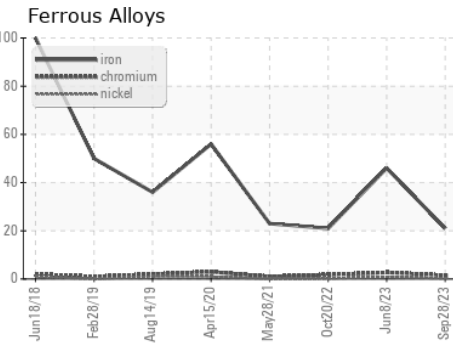

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004570 **Received** : 02 Oct 2023  
**Lab Number** : 05966980 **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10673531 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET

**Constructors Inc. - 603659**  
 1815 Y Street  
 Lincoln, NE  
 US 68508  
 Contact: Jack Linhart  
 jackl@constructorslincoln.com  
 T: (402)434-2157  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)