



Machine Id
HYSTER BEAM FORKLIFT
Component
Transmission (Manual)
Fluid
AW HYDRAULIC OIL ISO 46 (3 GAL)

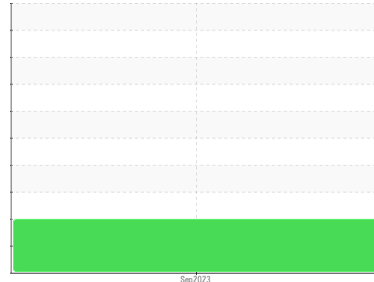

COMPONENT CONDITION SUMMARY

▲ Particle Trend

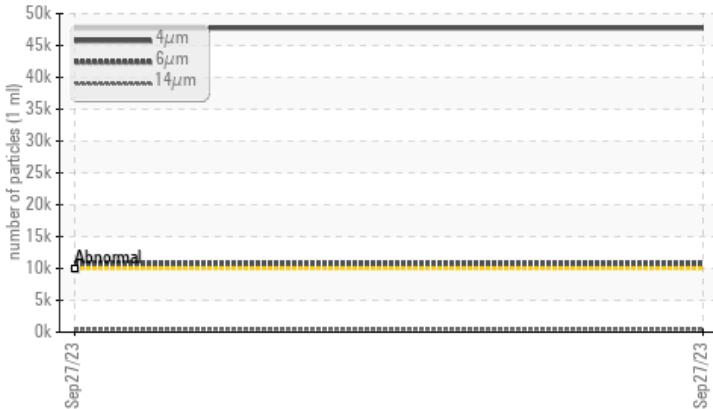

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	ISO 4406 (c)	ABNORMAL	---	---
Particles >4µm	>10000	▲ 47736	---	---	---
Particles >6µm	>2500	▲ 10748	---	---	---
Particles >14µm	>320	▲ 448	---	---	---
Particles >21µm	>80	▲ 84	---	---	---
Oil Cleanliness	>20/18/15	▲ 23/21/16	---	---	---

Customer Id: JACMOUNC
Sample No.: ST44525
Lab Number: 05967019
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com


RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Contact Required	---	---	?	Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

HISTORICAL DIAGNOSIS



Machine Id
HYSTER BEAM FORKLIFT
 Component
Transmission (Manual)
 Fluid
AW HYDRAULIC OIL ISO 46 (3 GAL)

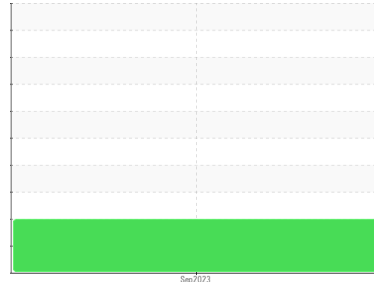

DIAGNOSIS

Recommendation
 We recommend you service the filters on this component. Resample at the next service interval to monitor. Due to an abnormal test result it is recommended to contact Stauff Corp at (201)-444-7800 for help resolving the issue.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of particulates present in the fluid.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	ST44525	---	---
Sample Date	Client Info	27 Sep 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>200	8	---	---
Chromium ppm ASTM D5185m	>5	0	---	---
Nickel ppm ASTM D5185m	>5	0	---	---
Titanium ppm ASTM D5185m		0	---	---
Silver ppm ASTM D5185m	>7	0	---	---
Aluminum ppm ASTM D5185m	>25	13	---	---
Lead ppm ASTM D5185m	>45	<1	---	---
Copper ppm ASTM D5185m	>225	72	---	---
Tin ppm ASTM D5185m	>10	<1	---	---
Vanadium ppm ASTM D5185m		0	---	---
Cadmium ppm ASTM D5185m		0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	5	87	---	---
Barium ppm ASTM D5185m	5	0	---	---
Molybdenum ppm ASTM D5185m	5	1	---	---
Manganese ppm ASTM D5185m		<1	---	---
Magnesium ppm ASTM D5185m	25	12	---	---
Calcium ppm ASTM D5185m	200	2581	---	---
Phosphorus ppm ASTM D5185m	300	964	---	---
Zinc ppm ASTM D5185m	370	1150	---	---
Sulfur ppm ASTM D5185m	2500	7313	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>125	9	---	---
Sodium ppm ASTM D5185m		<1	---	---
Potassium ppm ASTM D5185m	>20	2	---	---
Water % ASTM D6304	>0.1	0.076	---	---
ppm Water ppm ASTM D6304	>1000	760.1	---	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm ASTM D7647	>10000	▲ 47736	---	---
Particles >6µm ASTM D7647	>2500	▲ 10748	---	---
Particles >14µm ASTM D7647	>320	▲ 448	---	---
Particles >21µm ASTM D7647	>80	▲ 84	---	---
Particles >38µm ASTM D7647	>20	1	---	---
Particles >71µm ASTM D7647	>4	0	---	---
Oil Cleanliness ISO 4406 (c)	>20/18/15	▲ 23/21/16	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g ASTM D8045	0.57	0.794	---	---


OIL ANALYSIS REPORT

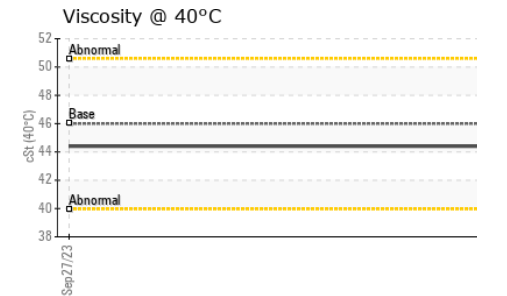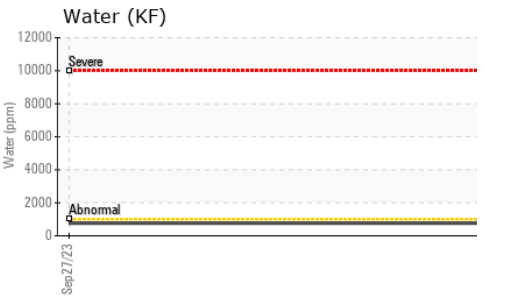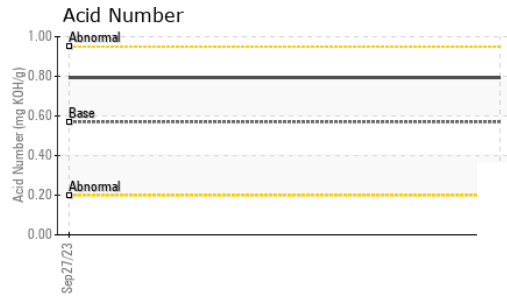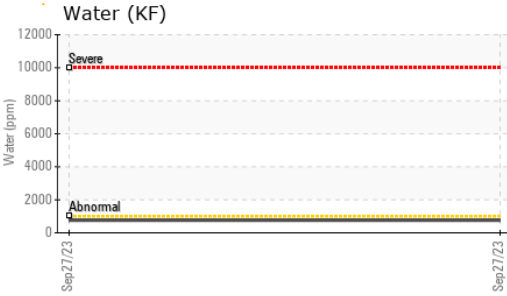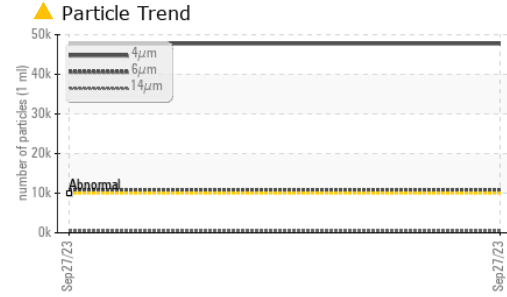





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.4	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

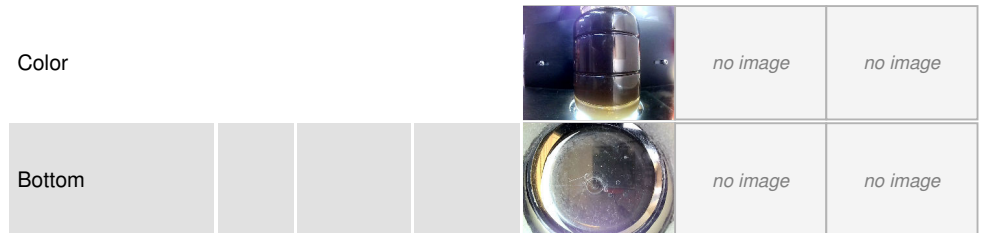

GRAPHS

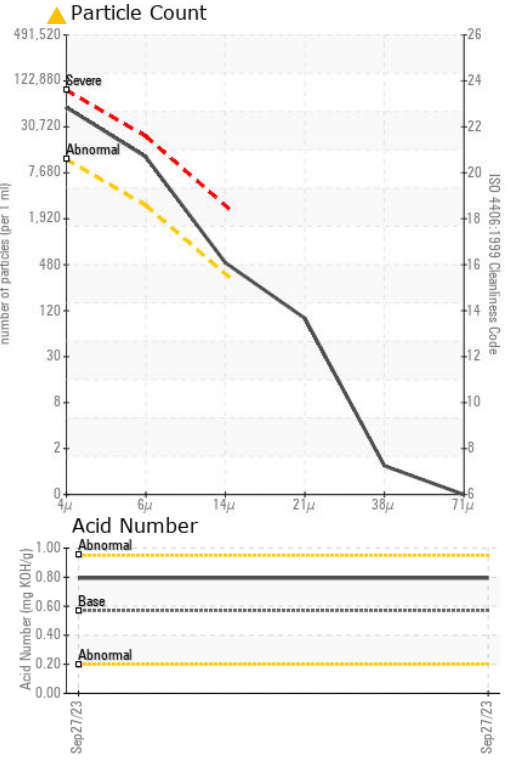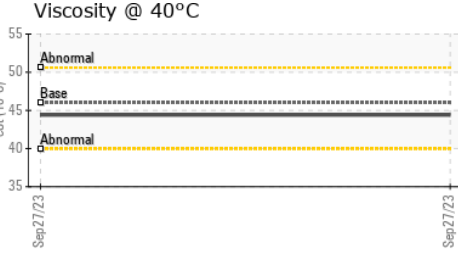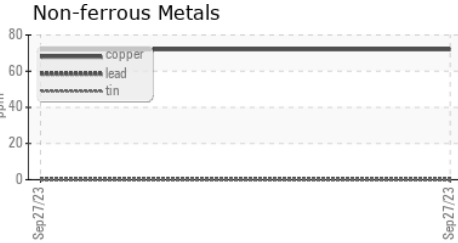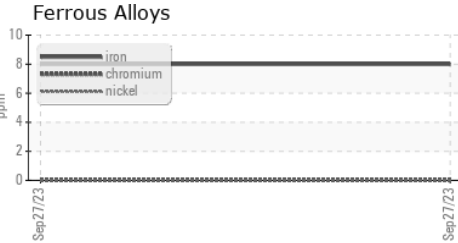

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ST44525 **Received** : 02 Oct 2023
Lab Number : 05967019 **Diagnosed** : 04 Oct 2023
Unique Number : 10673570 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, PrtCount)

JACKSON MOBILE EQUIPMENT REPAIR
 1713 OLD NC 27 HWY
 MOUNT HOLLY, NC
 US 28120
 Contact: JEFF
 jackson.er@icloud.com
 T: (704)524-3812
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)