

OIL ANALYSIS REPORT

KAESER DSD 250 4935930 (S/N 1060) Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

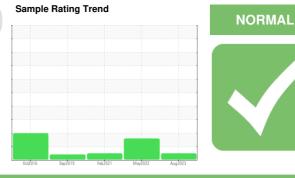


SAMPLE INFORMATION method limit/base current history1	history2
Sample Number Client Info KCP31232 KCP45077	KCP27535
Sample Date Client Info 25 Aug 2023 17 May 2022	17 Feb 2021
Machine Age hrs Client Info 50292 52445	44548
Oil Age hrs Client Info 0 8645	4422
Oil Changed Client Info Changed Changed	Changed
Sample Status NORMAL ATTENTION	NORMAL
WEAR METALS method limit/base current history1	history2
Iron ppm ASTM D5185m >50 0 <1	0
Chromium ppm ASTM D5185m >10 0 0	0
Nickel ppm ASTM D5185m >3 0 0	0
Titanium ppm ASTM D5185m >3 0 0	0
Silver ppm ASTM D5185m >2 0 0	0
Aluminum ppm ASTM D5185m >10 1	0
Lead ppm ASTM D5185m >10 0 <1	0
Copper ppm ASTM D5185m >50 15 2	2
Tin ppm ASTM D5185m >10 0 0	0
Antimony ppm ASTM D5185m	<1
Vanadium ppm ASTM D5185m 0 0	0
Cadmium ppm ASTM D5185m 0 0	0
ADDITIVES method limit/base current history1	history2
Boron ppm ASTM D5185m 0 0	<1
Barium ppm ASTM D5185m 90 0 58	0
Molybdenum ppm ASTM D5185m 0 0	0
Manganese ppm ASTM D5185m 0 0	0
Magnesium ppm ASTM D5185m 90 10 59	0
Calcium ppm ASTM D5185m 2 0 <1	0
Phosphorus ppm ASTM D5185m 3 4	2
Zinc ppm ASTM D5185m <1 0	0
Sulfur ppm ASTM D5185m 25307 17142	13821
CONTAMINANTS method limit/base current history1	history2
Silicon ppm ASTM D5185m >25 0 <1	<1
Sodium ppm ASTM D5185m 0 0	
	0
Potassium ppm ASTM D5185m >20 <1	0 0
Potassium ppm ASTM D5185m >20 <1	
	0
Water % ASTM D6304 >0.05 0.013 0.017	0 0.005
Water % ASTM D6304 >0.05 0.013 0.017 ppm Water ppm ASTM D6304 >500 136.6 171.6	0 0.005 53.2
Water % ASTM D6304 >0.05 0.013 0.017 ppm Water ppm ASTM D6304 >500 136.6 171.6 FLUID CLEANLINESS method limit/base current history1	0 0.005 53.2 history2
Water % ASTM D6304 >0.05 0.013 0.017 ppm Water ppm ASTM D6304 >500 136.6 171.6 FLUID CLEANLINESS method limit/base current history1 Particles >4μm ASTM D7647 156 9665	0 0.005 53.2 history2 3765
Water % ASTM D6304 >0.05 0.013 0.017 ppm Water ppm ASTM D6304 >500 136.6 171.6 FLUID CLEANLINESS method limit/base current history1 Particles >4µm ASTM D7647 156 9665 Particles >6µm ASTM D7647 >1300 39 ▲ 2109	0 0.005 53.2 history2 3765 400
Water % ASTM D6304 >0.05 0.013 0.017 ppm Water ppm ASTM D6304 >500 136.6 171.6 FLUID CLEANLINESS method limit/base current history1 Particles >4µm ASTM D7647 156 9665 Particles >6µm ASTM D7647 >1300 39 2109 Particles >14µm ASTM D7647 >80 8 114	0 0.005 53.2 history2 3765 400 22
Water % ASTM D6304 >0.05 0.013 0.017 ppm Water ppm ASTM D6304 >500 136.6 171.6 FLUID CLEANLINESS method limit/base current history1 Particles >4µm ASTM D7647 156 9665 Particles >6µm ASTM D7647 >1300 39 ≥109 Particles >14µm ASTM D7647 >80 8 114 Particles >21µm ASTM D7647 >20 4 25	0 0.005 53.2 history2 3765 400 22 8
Water % ASTM D6304 >0.05 0.013 0.017 ppm Water ppm ASTM D6304 >500 136.6 171.6 FLUID CLEANLINESS method limit/base current history1 Particles >4µm ASTM D7647 156 9665 Particles >6µm ASTM D7647 >1300 39 2109 Particles >14µm ASTM D7647 >80 8 114 Particles >21µm ASTM D7647 >20 4 25 Particles >38µm ASTM D7647 >4 1 2	0 0.005 53.2 history2 3765 400 22 8 0
Water % ASTM D6304 >0.05 0.013 0.017 ppm Water ppm ASTM D6304 >500 136.6 171.6 FLUID CLEANLINESS method limit/base current history1 Particles >4µm ASTM D7647 156 9665 Particles >6µm ASTM D7647 >1300 39 ≥109 Particles >6µm ASTM D7647 >80 8 114 Particles >21µm ASTM D7647 >20 4 ≥5 Particles >38µm ASTM D7647 >4 1 2 Particles >71µm ASTM D7647 >3 0 0	0 0.005 53.2 history2 3765 400 22 8 8 0 0


Contact/Location: ? ? - JEFWES


Report Id: JEFWES [WUSCAR] 05967028 (Generated: 10/05/2023 05:18:46) Rev: 1



OIL ANALYSIS REPORT

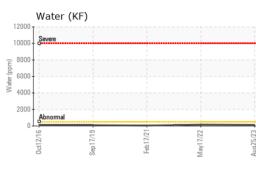


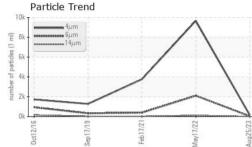

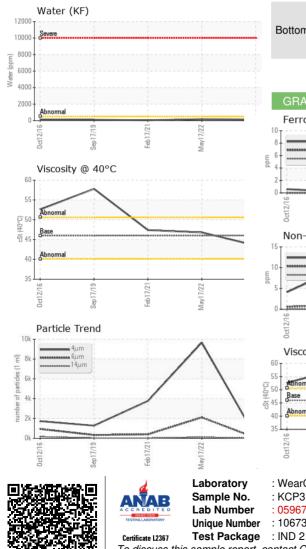

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.5	46.8	47.4
SAMPLE IMAGES	5	method	limit/base	current	history1	history2
Color				• 9		

Bottom

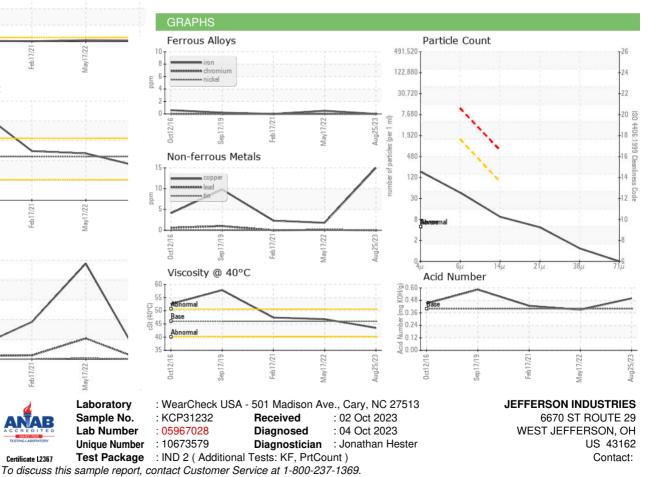

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Page 2 of 2