

OIL ANALYSIS REPORT

Sample Rating Trend



Machino Id

KAESER ASD 40T 8035851 (S/N 3618)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Aug2022	Sep2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA000607	KCP48291D	
Sample Date		Client Info		20 Sep 2023	19 Aug 2022	
Machine Age	hrs	Client Info		7211	2466	
Oil Age	hrs	Client Info		0	0	
Oil Changed	1113	Client Info		N/A	Changed	
Sample Status		Oliotic IIIIo		NORMAL	NORMAL	
		us a the a al	line it /le e e e			
WEAR METALS		method	limit/base	current	history1	history2
Iron Chromium	ppm	ASTM D5185m	>50 >10	0	<1	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>3		0	
	ppm			0 2		
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m			0	
Copper	ppm	ASTM D5185m		18	4	
Tin	ppm	ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	100	3	41	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	2	35	
Zinc	ppm	ASTM D5185m	0	44	10	
Sulfur	ppm	ASTM D5185m	23500	21737	21678	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		0	10	
Potassium	ppm	ASTM D5185m	>20	1	11	
Water	%	ASTM D6304	>0.05	0.012	0.016	
ppm Water	ppm	ASTM D6304	>500	127.9	165.7	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		3664	4007	
Particles >6µm		ASTM D7647	>1300	816	1132	
Particles >14µm		ASTM D7647	>80	32	54	
Particles >21µm		ASTM D7647	>20	10	13	
Particles >38µm		ASTM D7647	>4	0	0	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	19/17/12	19/17/13	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.37	0.35	



OIL ANALYSIS REPORT

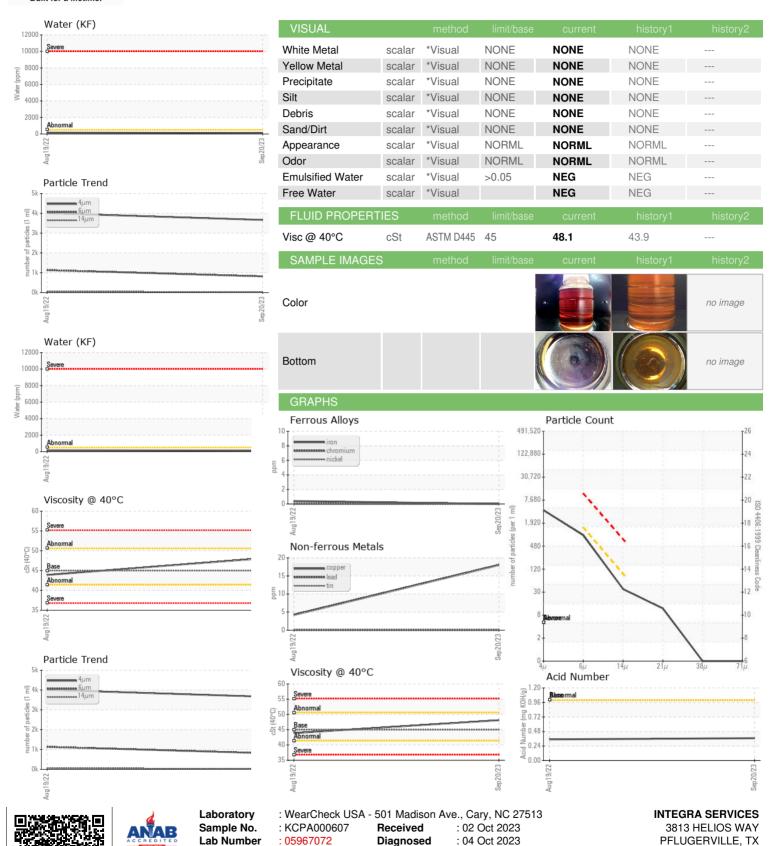



Certificate L2367

Unique Number

: 10673623

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnostician : Don Baldridge

US 78660

T: F:

Contact: SERVICE MANAGER