

PROBLEM SUMMARY


ISO ISO

Sample Rating Trend

Machine Id 5641643 (S/N 1251) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

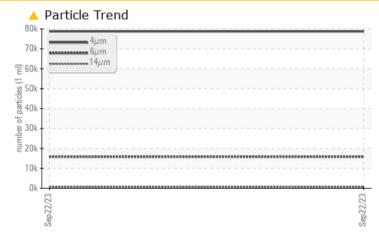

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL						
Particles >6µm	ASTM D7647 >13	00 🔺 15846						
Particles >14µm	ASTM D7647 >80	<u>▲</u> 607						
Particles >21µm	ASTM D7647 >20	<mark>▲ 188</mark>						
Particles >38µm	ASTM D7647 >4	1 7						
Oil Cleanliness	ISO 4406 (c) >/-	17/13 🔺 23/21/16						

Customer Id: FRAMIDWI Sample No.: KCPA003847 Lab Number: 05967098 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

Machine Id 5641643 (S/N 1251) Component

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA003847		
Sample Date		Client Info		22 Sep 2023		
Machine Age	hrs	Client Info		16771		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	2		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	4		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	28		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	2		
Zinc	ppm	ASTM D5185m	0	31		
Sulfur	ppm	ASTM D5185m	23500	20925		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	3		
Water	%	ASTM D6304	>0.05	0.011		
ppm Water	ppm	ASTM D6304	>500	115.6		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		78747		
Particles >6µm						
		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647 ASTM D7647	>1300 >80	▲ 15846 ▲ 607		
Particles >14µm Particles >21µm						
		ASTM D7647	>80	607		
Particles >21µm		ASTM D7647 ASTM D7647	>80 >20	▲ 607 ▲ 188		
Particles >21µm Particles >38µm		ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	 ▲ 607 ▲ 188 ▲ 17 		
Particles >21µm Particles >38µm Particles >71µm	TION	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4 >3	 ▲ 607 ▲ 188 ▲ 17 2 		





Built for a lifetime

OIL ANALYSIS REPORT

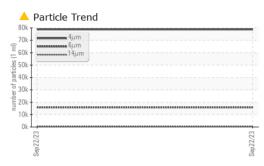

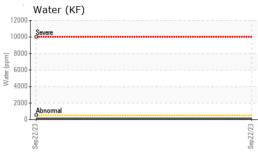

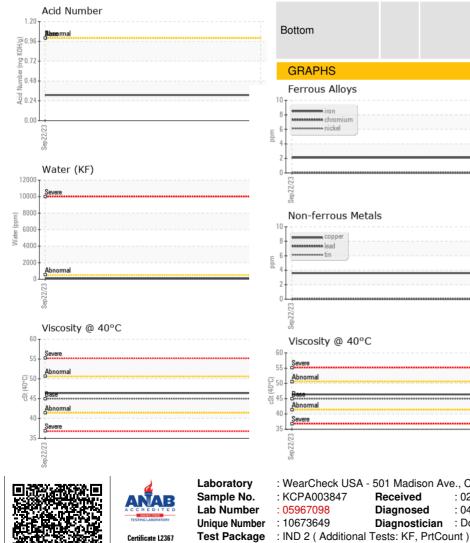

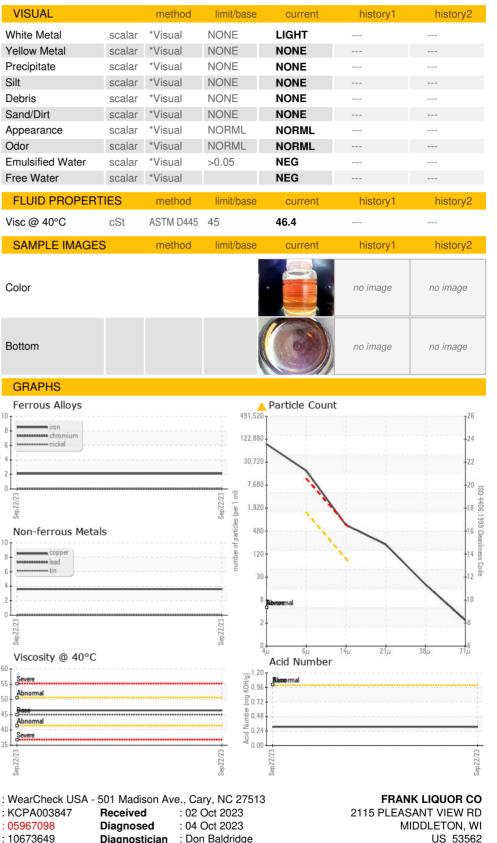

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - FRAMIDWI

T: F:

Contact: Service Manager