




OIL ANALYSIS REPORT



Area
OKLAHOMA/109/EG - ROLLER/COMPACTOR
 Machine Id
65.08L [OKLAHOMA^109^EG - ROLLER/COMPACTOR]
 Component
Front Gear Drive
 Fluid
MOBIL SHC 630 (--- GAL)

Sample Rating Trend

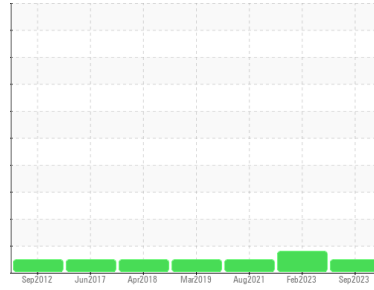

NORMAL

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: 847 hrs)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0819832	WC0758712	WC0606249
Sample Date	Client Info		25 Sep 2023	14 Feb 2023	04 Aug 2021
Machine Age	hrs	Client Info	847	617	292
Oil Age	hrs	Client Info	387	500	500
Oil Changed	Client Info		N/A	Changed	Not Chngd
Sample Status			NORMAL	ABNORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	2	126	4
Chromium	ppm	ASTM D5185m	>5	0	1	0
Nickel	ppm	ASTM D5185m	>8	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	<1	0
Lead	ppm	ASTM D5185m	>20	0	▲ 31	2
Copper	ppm	ASTM D5185m	>500	2	16	8
Tin	ppm	ASTM D5185m	>75	0	<1	0
Antimony	ppm	ASTM D5185m		---	---	1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		0	0	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	2	0
Magnesium	ppm	ASTM D5185m		0	3	<1
Calcium	ppm	ASTM D5185m		21	23	6
Phosphorus	ppm	ASTM D5185m		478	358	444
Zinc	ppm	ASTM D5185m		0	15	5
Sulfur	ppm	ASTM D5185m		204	320	48

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>35	23	25	25
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	0	2	5

VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG



OIL ANALYSIS REPORT



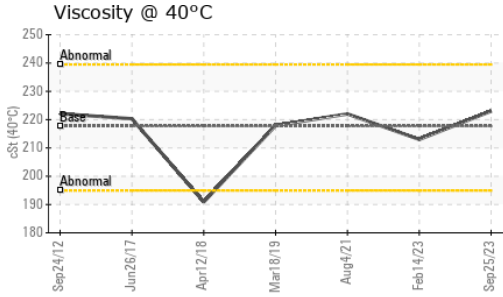


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	217.7	223	213	222

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

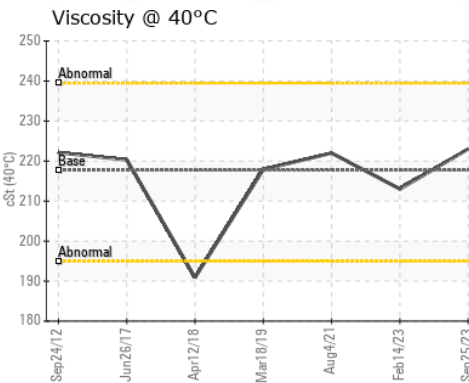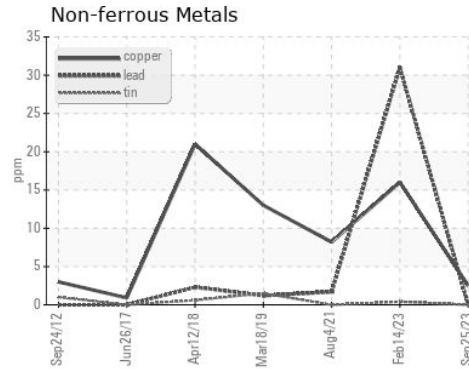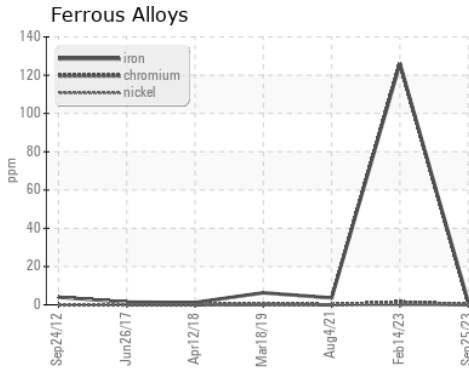

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0819832
Lab Number : **05967237**
Unique Number : 10673788
Test Package : CONST

Received : 02 Oct 2023
Diagnosed : 04 Oct 2023
Diagnostician : Don Baldrige

SHERWOOD CONSTRUCTION CO INC
 3219 WEST MAY ST
 WICHITA, KS
 US 67213
 Contact: DOUG KING
 doug.king@sherwood.net
 T: (316)617-3161
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)