




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

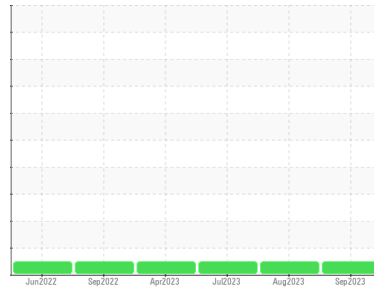

Area  
**OCEAN NAVIGATOR**  
 Machine Id  
**[OCEAN NAVIGATOR] OCEAN NAVIGATOR MENG PT**  
 Component  
**Port Main Engine**  
 Fluid  
**FUCHS 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0824577</b>	WC0824511	WC0824523
Sample Date	Client Info			<b>24 Sep 2023</b>	15 Aug 2023	24 Jul 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>33</b>	28	27
Chromium	ppm	ASTM D5185m	>8	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>18	<b>10</b>	7	8
Copper	ppm	ASTM D5185m	>80	<b>26</b>	29	31
Tin	ppm	ASTM D5185m	>14	<b>1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>47</b>	68	68
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>9</b>	11	12
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>23</b>	14	16
Calcium	ppm	ASTM D5185m		<b>3496</b>	3262	3463
Phosphorus	ppm	ASTM D5185m		<b>1044</b>	920	958
Zinc	ppm	ASTM D5185m		<b>1369</b>	1169	1221
Sulfur	ppm	ASTM D5185m		<b>4216</b>	3893	4513



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>7</b>	7	7
Sodium	ppm	ASTM D5185m	>75	<b>30</b>	30	34
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	4	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.5</b>	8.9	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.8</b>	21.7	21.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.1</b>	15.4	14.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.1</b>	7.9	8.6







# OIL ANALYSIS REPORT

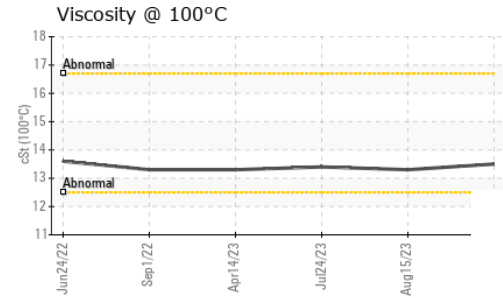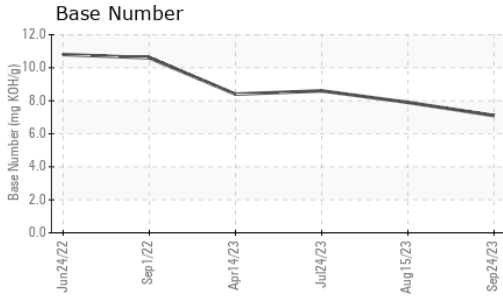

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>13.5</b>	13.3	13.4

## GRAPHS

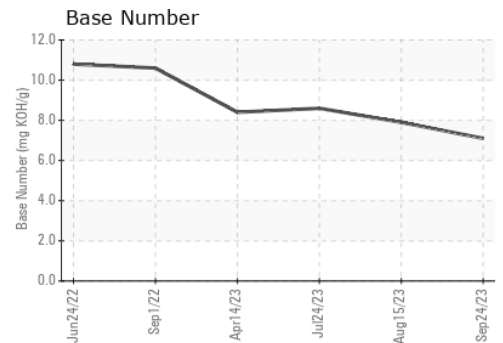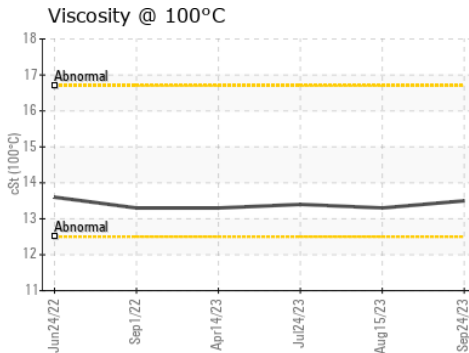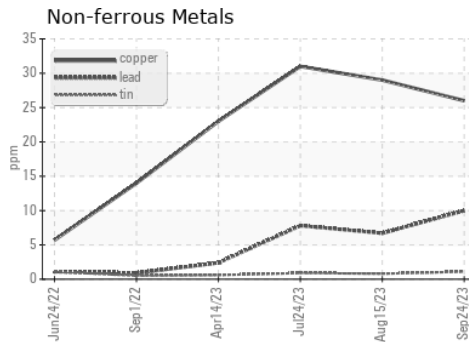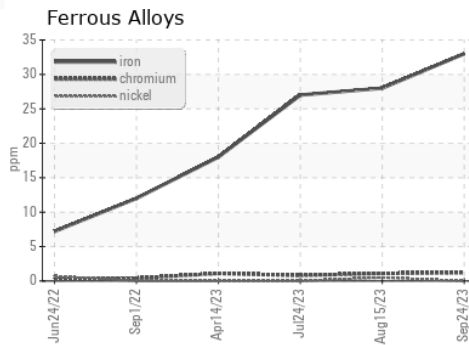

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0824577 **Received** : 03 Oct 2023  
**Lab Number** : **05967397** **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10673948 **Diagnostician** : Wes Davis  
**Test Package** : MAR 2

**American Queen Voyages - Oceans**  
 1201 Bridgeport Drive  
 Jeffersonville, IN  
 US 47130  
 Contact: Dietrich Giles  
 DIETRICH.GILES@AQVOYAGES.COM  
 T: (228)591-6239  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)