




OIL ANALYSIS REPORT

Sample Rating Trend

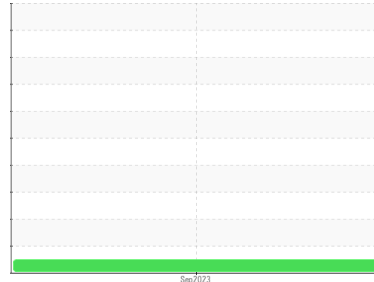

NORMAL



Machine Id
8928634
 Component
Diesel Engine
 Fluid
NOT GIVEN (--- QTS)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		IL05967522	---	---
Sample Date	Client Info		14 Sep 2023	---	---
Machine Age	mls	Client Info	175293	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	38	---	---
Chromium	ppm	ASTM D5185m >20	2	---	---
Nickel	ppm	ASTM D5185m >4	0	---	---
Titanium	ppm	ASTM D5185m	0	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >20	2	---	---
Lead	ppm	ASTM D5185m >40	<1	---	---
Copper	ppm	ASTM D5185m >330	1	---	---
Tin	ppm	ASTM D5185m >15	<1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	28	---	---
Barium	ppm	ASTM D5185m	0	---	---
Molybdenum	ppm	ASTM D5185m	48	---	---
Manganese	ppm	ASTM D5185m	1	---	---
Magnesium	ppm	ASTM D5185m	537	---	---
Calcium	ppm	ASTM D5185m	1686	---	---
Phosphorus	ppm	ASTM D5185m	757	---	---
Zinc	ppm	ASTM D5185m	922	---	---
Sulfur	ppm	ASTM D5185m	2489	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	11	---	---
Sodium	ppm	ASTM D5185m	3	---	---
Potassium	ppm	ASTM D5185m >20	5	---	---
Fuel	%	ASTM D3524 >5	<1.0	---	---

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	---	---
Nitration	Abs/cm	*ASTM D7624 >20	8.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.5	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	19.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	7.6	---	---







OIL ANALYSIS REPORT

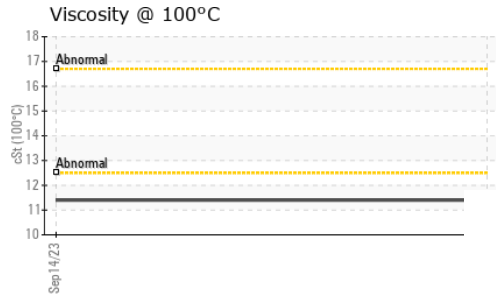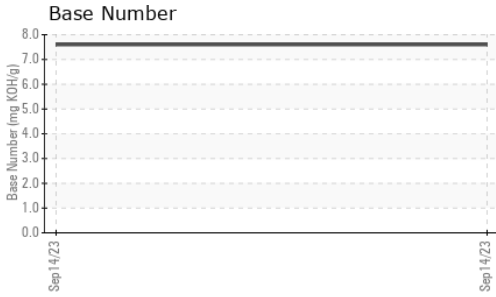

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.4	---	---

GRAPHS

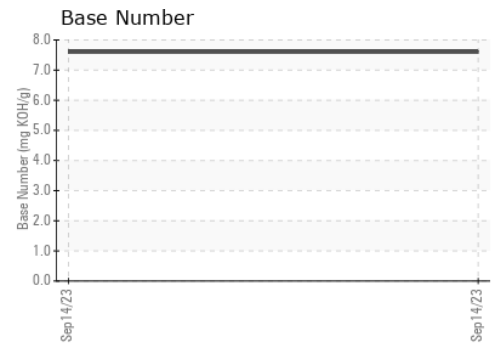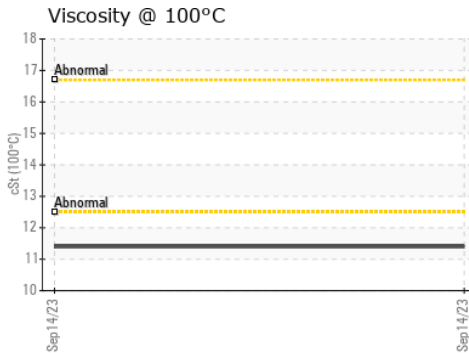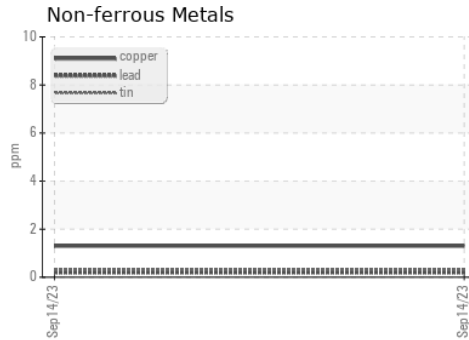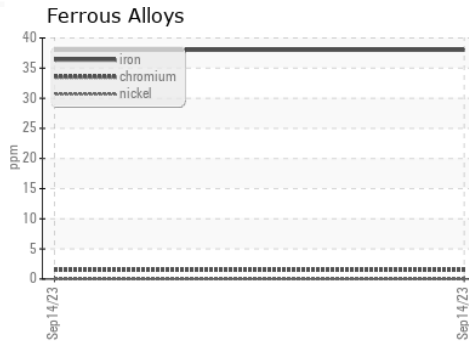

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL05967522 **Received** : 03 Oct 2023
Lab Number : 05967522 **Diagnosed** : 04 Oct 2023
Unique Number : 10674073 **Diagnostician** : Sean Felton
Test Package : FLEET (Additional Tests: FuelDilution)

IDEALEASE-NORCROSS
 4571 NORTH BUFORD HWY
 NORCROSS, GA
 US 30071-2808
 Contact: RICK MARKS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (770)300-0614