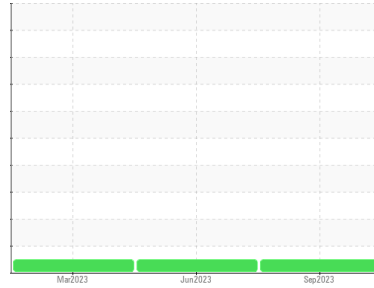


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area

**[W46861]**

Machine Id

**JOHN DEERE 750L 1T0750LXPNF430914**

Component

**Hydraulic System**

Fluid

**JOHN DEERE HYDRAU (--- GAL)**
**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>JR0179217</b>	JR0165090	JR0165667
Sample Date	Client Info		<b>26 Sep 2023</b>	21 Jun 2023	13 Mar 2023
Machine Age	hrs	Client Info	<b>1471</b>	955	495
Oil Age	hrs	Client Info	<b>0</b>	955	0
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

**WEAR METALS**

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>13</b>	11	10
Iron	ppm	ASTM D5185m >20	<b>1</b>	0	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >10	<b>0</b>	1	<1
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >75	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	5	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	1	0
Calcium	ppm	ASTM D5185m 87	<b>78</b>	67	88
Phosphorus	ppm	ASTM D5185m 727	<b>647</b>	583	632
Zinc	ppm	ASTM D5185m 900	<b>877</b>	796	838
Sulfur	ppm	ASTM D5185m 1500	<b>1839</b>	1784	1955

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>1</b>	0	1
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	0
Potassium	ppm	ASTM D5185m >20	<b>3</b>	2	<1






**FLUID CLEANLINESS**

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>2967</b>	541	747
Particles >6µm	ASTM D7647	>1300	<b>1230</b>	125	218
Particles >14µm	ASTM D7647	>160	<b>100</b>	10	30
Particles >21µm	ASTM D7647	>40	<b>20</b>	2	15
Particles >38µm	ASTM D7647	>10	<b>1</b>	0	2
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>19/17/14</b>	16/14/10	17/15/12

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.65</b>	0.65	0.68


# OIL ANALYSIS REPORT

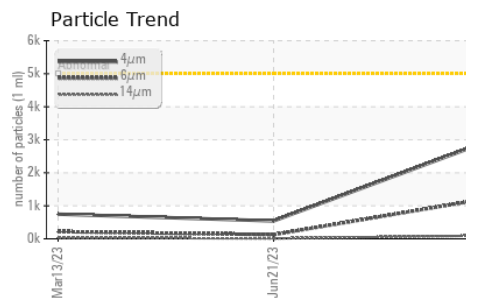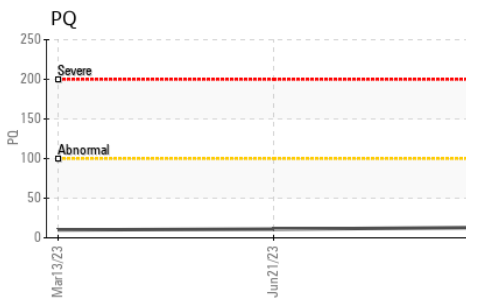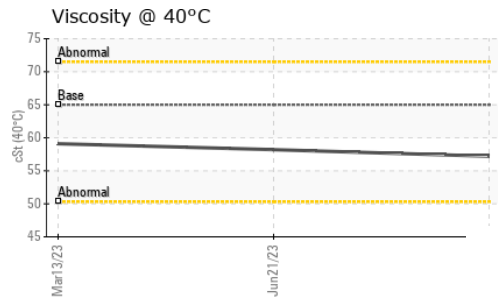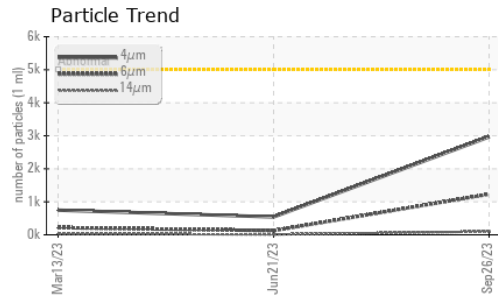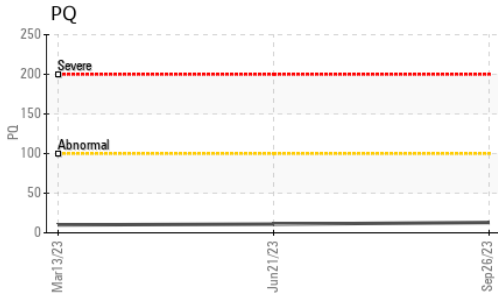






PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 65	57.2	58.2	59.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

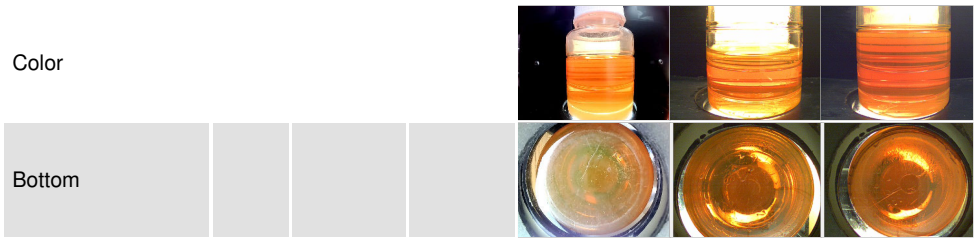

## GRAPHS

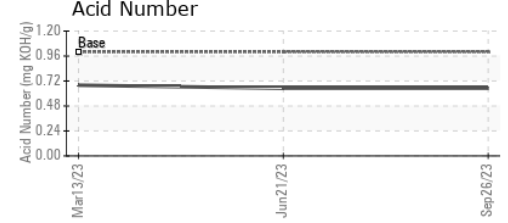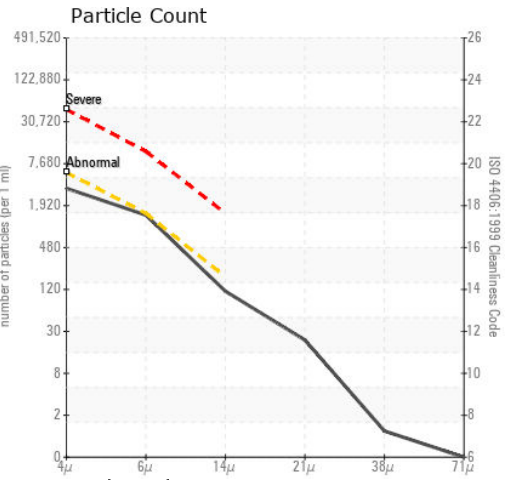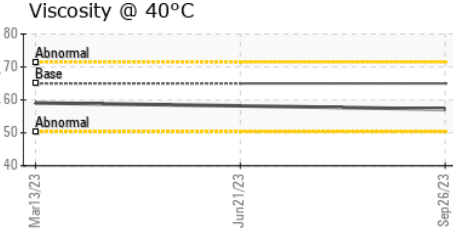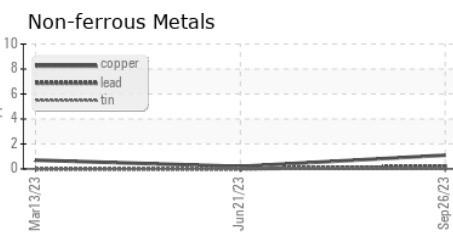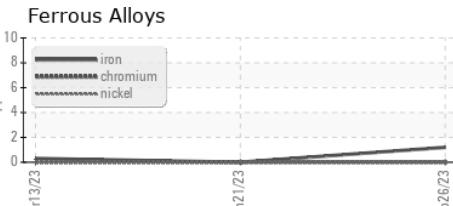

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0179217 **Received** : 03 Oct 2023  
**Lab Number** : 05967700 **Diagnosed** : 04 Oct 2023  
**Unique Number** : 10674251 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)