



# PROBLEM SUMMARY

Sample Rating Trend




ISO



Machine Id  
**HPTS (S/N CB-105-55-01)**  
 Component  
**Hydraulic System**  
 Fluid  
**NOT GIVEN (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Particle Trend

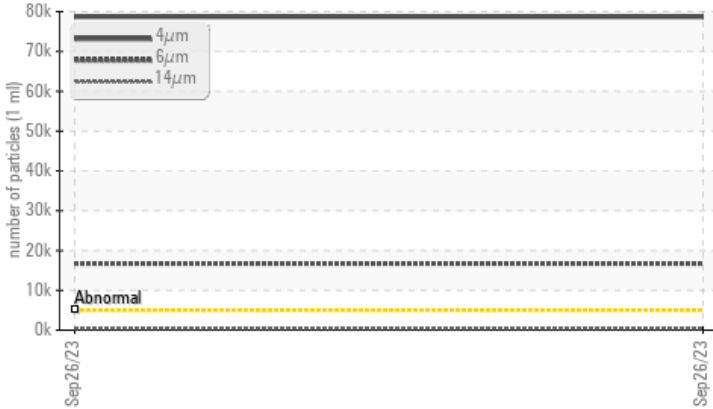

## RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

## PROBLEMATIC TEST RESULTS

Sample Status			<b>ABNORMAL</b>	---	---
Particles >4µm	ASTM D7647	>5000	▲ <b>78698</b>	---	---
Particles >6µm	ASTM D7647	>1300	▲ <b>16719</b>	---	---
Particles >14µm	ASTM D7647	>160	▲ <b>406</b>	---	---
Particles >21µm	ASTM D7647	>40	▲ <b>40</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ <b>23/21/16</b>	---	---

Customer Id: DUNAUS  
 Sample No.: WC0806746  
 Lab Number: 05967737  
 Test Package: PLANT



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component.
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

Machine Id  
**HPTS (S/N CB-105-55-01)**  
 Component  
**Hydraulic System**  
 Fluid  
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0806746</b>	---	---
Sample Date	Client Info	<b>26 Sep 2023</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron ppm	ASTM D5185m >20	<b>4</b>	---	---
Chromium ppm	ASTM D5185m >20	<b>0</b>	---	---
Nickel ppm	ASTM D5185m >20	<b>0</b>	---	---
Titanium ppm	ASTM D5185m	<b>0</b>	---	---
Silver ppm	ASTM D5185m	<b>0</b>	---	---
Aluminum ppm	ASTM D5185m >20	<b>3</b>	---	---
Lead ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Copper ppm	ASTM D5185m >20	<b>2</b>	---	---
Tin ppm	ASTM D5185m >20	<b>2</b>	---	---
Vanadium ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron ppm	ASTM D5185m	<b>8</b>	---	---
Barium ppm	ASTM D5185m	<b>0</b>	---	---
Molybdenum ppm	ASTM D5185m	<b>0</b>	---	---
Manganese ppm	ASTM D5185m	<b>0</b>	---	---
Magnesium ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Calcium ppm	ASTM D5185m	<b>67</b>	---	---
Phosphorus ppm	ASTM D5185m	<b>167</b>	---	---
Zinc ppm	ASTM D5185m	<b>8</b>	---	---
Sulfur ppm	ASTM D5185m	<b>1594</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm	ASTM D5185m >15	<b>2</b>	---	---
Sodium ppm	ASTM D5185m	<b>0</b>	---	---
Potassium ppm	ASTM D5185m >20	<b>3</b>	---	---

## FLUID CLEANLINESS





method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	<b>▲ 78698</b>	---	---
Particles >6µm	ASTM D7647 >1300	<b>▲ 16719</b>	---	---
Particles >14µm	ASTM D7647 >160	<b>▲ 406</b>	---	---
Particles >21µm	ASTM D7647 >40	<b>▲ 40</b>	---	---
Particles >38µm	ASTM D7647 >10	<b>0</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >19/17/14	<b>▲ 23/21/16</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN) mg KOH/g	ASTM D8045	<b>0.76</b>	---	---





# OIL ANALYSIS REPORT

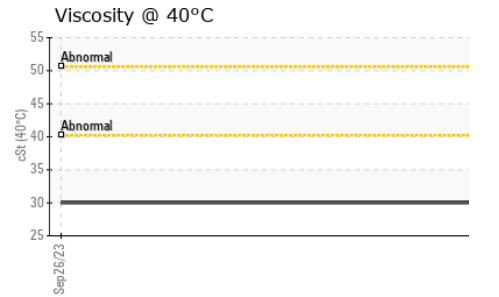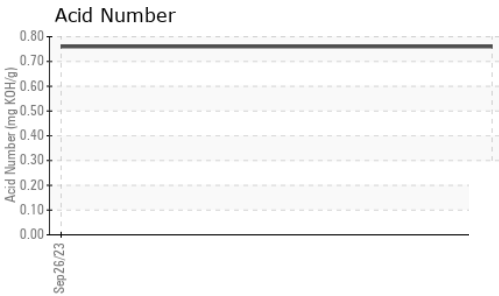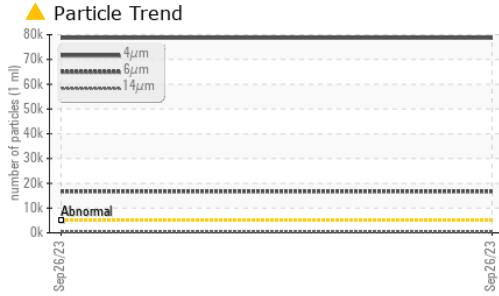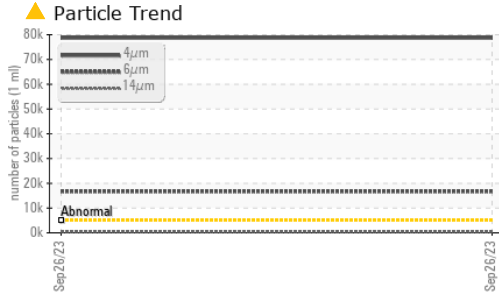





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	30.0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

### GRAPHS

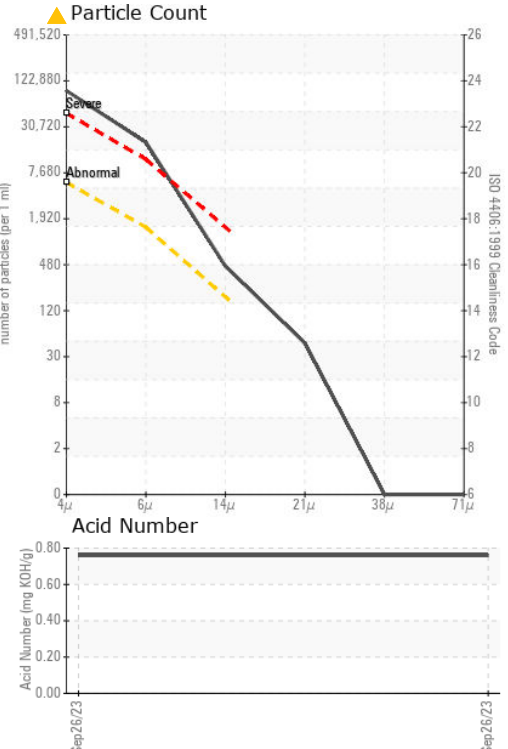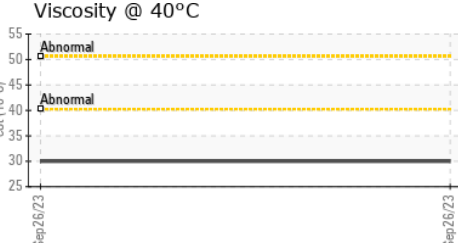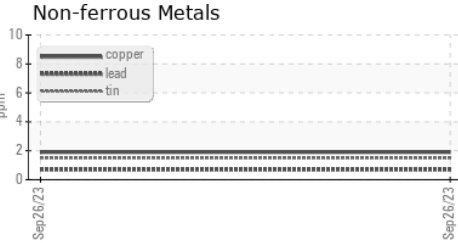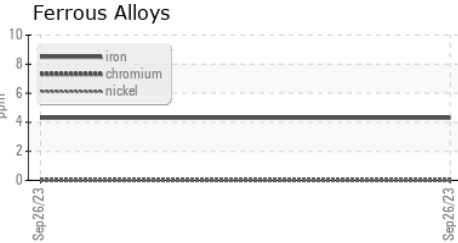

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0806746 **Received** : 03 Oct 2023  
**Lab Number** : 05967737 **Diagnosed** : 05 Oct 2023  
**Unique Number** : 10674288 **Diagnostician** : Don Baldrige  
**Test Package** : PLANT

**DUNAN MICROSTAQ INC**  
 4120 FREIDRICH LANE SUITE 225  
 AUSTIN, TX  
 US 78744  
 Contact: KEVIN SINKAR  
 ksinkar@dmq-us.com  
 T: (512)628-2890  
 F: (512)628-2897

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)