


# PROBLEM SUMMARY


Sample Rating Trend

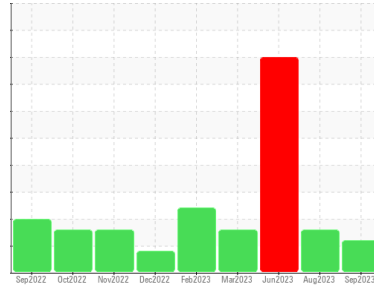

Area  
**Paper Cup Machines**  
 Machine Id  
**PMC 1001 POS-125 (S/N 50299)**  
 Component  
**Circulating System**  
 Fluid  
**SUMMIT Syngear SH-1032 320 (85 GAL)**

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

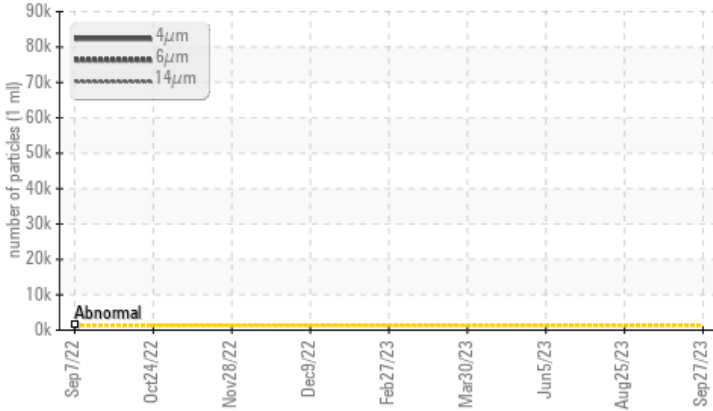

## RECOMMENDATION

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ABNORMAL	SEVERE
Particles >4µm	ASTM D7647	>1300	▲ 85812	---	---
Particles >6µm	ASTM D7647	>320	▲ 7168	---	---
Oil Cleanliness	ISO 4406 (c)	>17/15/13	▲ 24/20/12	---	---

Customer Id: DARDALTX  
 Sample No.: TO50001167  
 Lab Number: 05967773  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We recommend you service the filters on this component if applicable.

## HISTORICAL DIAGNOSIS

### 25 Aug 2023 Diag: Doug Bogart

#### SEDIMENT



Resample at the next service interval to monitor. All component wear rates are normal. Appearance is milky. There is a high amount of visible silt present in the sample. The AN level is acceptable for this fluid.

view report



### 05 Jun 2023 Diag: Don Baldrige

#### WATER



We advise that you check for the source of water entry. We advise that you follow the water drain-off procedure for this component, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. All component wear rates are normal. Appearance is hazy. There is a moderate amount of visible silt present in the sample. There is a light concentration of water present in the oil. Excessive free water present. The AN level is acceptable for this fluid.

view report



### 30 Mar 2023 Diag: Angela Borella

#### SEDIMENT




Resample at the next service interval to monitor. All component wear rates are normal. Appearance is hazy. There is a moderate amount of visible silt present in the sample. The AN level is acceptable for this fluid.

view report



# OIL ANALYSIS REPORT

Sample Rating Trend

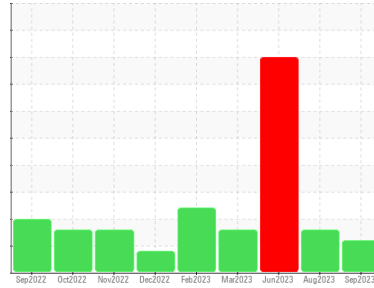

Area  
**Paper Cup Machines**  
 Machine Id  
**PMC 1001 POS-125 (S/N 50299)**  
 Component  
**Circulating System**  
 Fluid  
**SUMMIT Syngear SH-1032 320 (85 GAL)**

## DIAGNOSIS

**Recommendation**  
 We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is a high amount of silt (particulates < 14 microns in size) present in the oil.

**Fluid Condition**  
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>TO50001167</b>	TO50001782	TO50001767
Sample Date	Client Info		<b>27 Sep 2023</b>	25 Aug 2023	05 Jun 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	SEVERE

WEAR METALS	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>20</b>	23	26
Iron	ppm	ASTM D5185m	<b>15</b>	22	18
Chromium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	<b>6</b>	22	18
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	<b>&lt;1</b>	3	<1
Lead	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	<b>2</b>	2	2
Tin	ppm	ASTM D5185m	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>110</b>	135	128
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	4	<1
Calcium	ppm	ASTM D5185m	<b>34</b>	2	0
Phosphorus	ppm	ASTM D5185m	<b>488</b>	514	484
Zinc	ppm	ASTM D5185m	<b>7</b>	<1	0
Sulfur	ppm	ASTM D5185m	<b>8691</b>	9279	9830


CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<b>3359</b>	10000	9829
Sodium	ppm	ASTM D5185m	<b>2</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>1</b>	1	0
Water	%	ASTM D6304	<b>0.022</b>	0.022	▲ 0.126
ppm Water	ppm	ASTM D6304	<b>224.3</b>	223.5	▲ 1260

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>1300	▲ <b>85812</b>	---	---
Particles >6µm	ASTM D7647	>320	▲ <b>7168</b>	---	---
Particles >14µm	ASTM D7647	>80	<b>33</b>	---	---
Particles >21µm	ASTM D7647	>20	<b>6</b>	---	---
Particles >38µm	ASTM D7647	>4	<b>1</b>	---	---
Particles >71µm	ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>17/15/13	▲ <b>24/20/12</b>	---	---


FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.87</b>	0.91	0.94

# OIL ANALYSIS REPORT


## ▲ Particle Trend

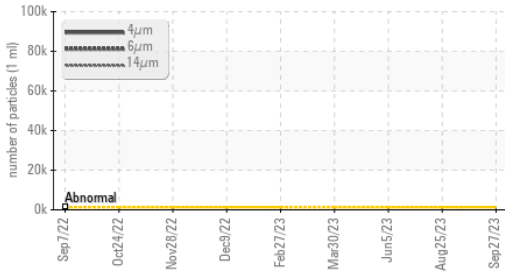


## Water (KF)

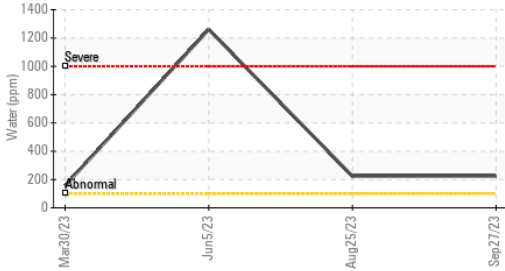


## Viscosity @ 100°C

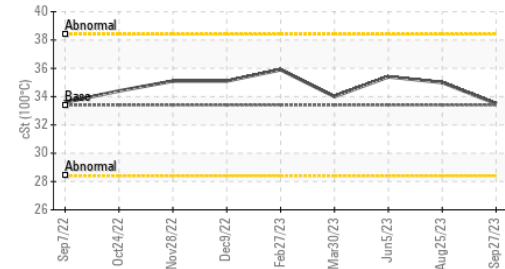

## PQ

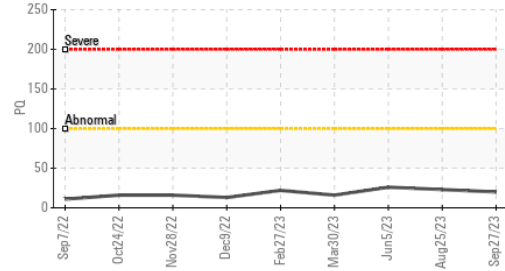


## Viscosity @ 100°C

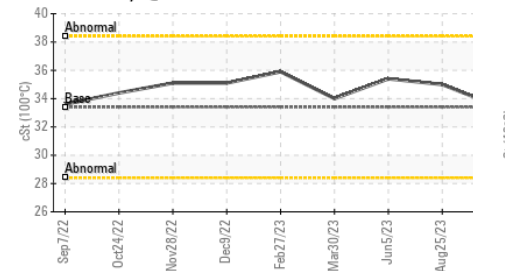

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	▲ HEAVY
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	▲ HAZY
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	NEG	NEG	▲ 0.2%
Free Water	scalar	*Visual	NEG	NEG	● 10.0


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	326	347	352
Visc @ 100°C	cSt	ASTM D445	33.4	33.5	35.0
Viscosity Index (VI)	Scale	ASTM D2270	145	137	142

## SAMPLE IMAGES

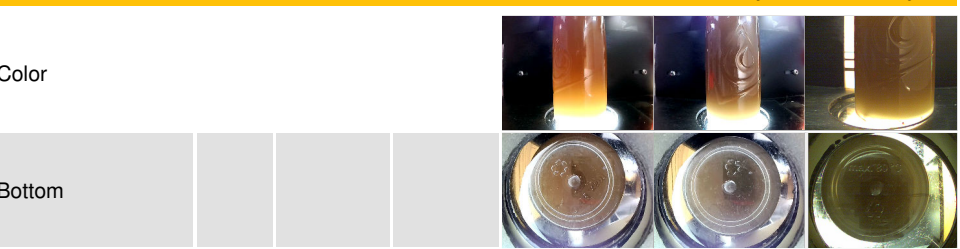


## GRAPHS


### Ferrous Alloys

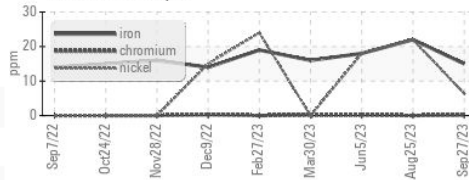


### Non-ferrous Metals

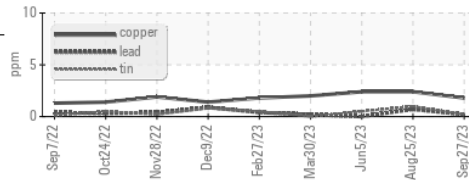


### Viscosity @ 40°C

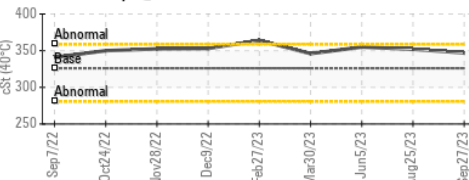

### ▲ Particle Count

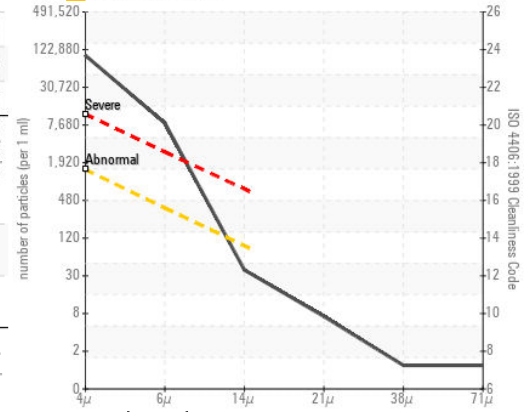

### Acid Number

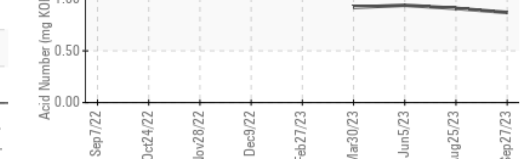

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO50001167 **Received** : 03 Oct 2023  
**Lab Number** : 05967773 **Diagnosed** : 05 Oct 2023  
**Unique Number** : 10674324 **Diagnostician** : Jonathan Hester  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, PQ, PrtCount, VI )

**DART CONTAINER CORPORATION**  
 4444 W LEADBETTER DR  
 DALLAS, TX  
 US 75236  
 Contact: YON PALOMINO  
 yon.palomino@dart.biz  
 T: (214)775-5673  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)