

OIL ANALYSIS REPORT

ATLAS COPCO WASTE WATER BLOWER 2 Component

Blower Fluic

USPI OFM AIR 68 (--- GAL)

Recommendation

Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

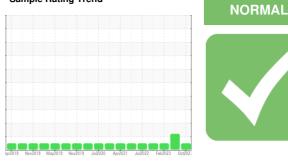

Sample Rating Trend




SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USPM29786	USPM28480	USPM26486
Sample Date		Client Info		02 Oct 2023	18 Jun 2023	27 Feb 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		<1	0	0
Chromium	ppm	ASTM D5185m		0	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m		0	0	0
Lead	ppm	ASTM D5185m		0	0	0
Copper	ppm	ASTM D5185m		<1	0	0
Tin	ppm	ASTM D5185m		0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		<1	0	0
Calcium	ppm	ASTM D5185m		<1	0	0
Phosphorus	ppm	ASTM D5185m		823	744	694
Zinc	ppm	ASTM D5185m		<1	0	1
Sulfur	ppm	ASTM D5185m		904	964	818
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		0	0	<1
Sodium	ppm	ASTM D5185m		0	0	<1
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Water	%	ASTM D6304		0.021	0.003	0.003
ppm Water	ppm	ASTM D6304		217.2	28.4	35.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	1312	▲ 3300	1144
Particles >6µm		ASTM D7647	>640	208	▲ 1002	301
Particles >14µm		ASTM D7647	>80	6	59	12
Particles >21µm		ASTM D7647	>20	2	18	3
Particles >38µm		ASTM D7647	>4	1	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>18/16/13	18/15/10	▲ 19/17/13	17/15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.53	0.54	0.52




OIL ANALYSIS REPORT


VICTAL

Bottom

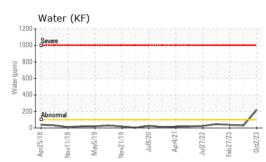

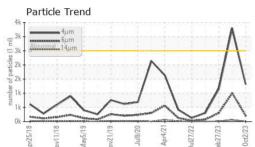

VISUAL		method	limit/base	current	nistory i	nistory2
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual		NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		63.0	64.3	72.7
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color						H Bower 2 UT559 XL M

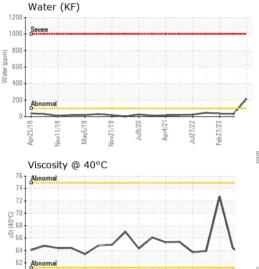

10/Pro

60.


4

3k 3k 3k 2k 2k 2k

Ja 1k

Apr25/1

Particle Trend

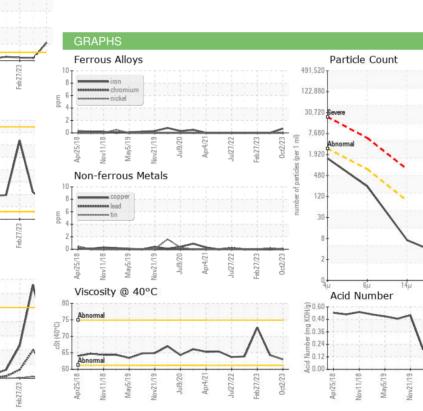

CARGILL FOODS-COLUMBUS : WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 03 Oct 2023 COLUMBUS, NE : 04 Oct 2023 Diagnostician : Doug Bogart US 68601 Contact:

21/

Apr4/21

02/6/10

: USPM29786

: 05967829

: 10674380

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received

Diagnosed

Certificate L2367

Laboratory

Sample No.

Lab Number

Unique Number

Contact/Location: - CARCOLNE

Page 2 of 2

20 8

4406

19999

6

2 Code

0ct2/23

T:

F:

Feb27/23

Test Package : IND 2 To discuss this sample report, contact Customer Service at 1-800-237-1369.