

PROBLEM SUMMARY




ISO

Sample Rating Trend

FES CARCOL 8 (S/N 16L22L)

Refrigeration Compressor Fluid USPI ALT-68 SC (--- GAL)

COMPONENT CONDITION SUMMARY

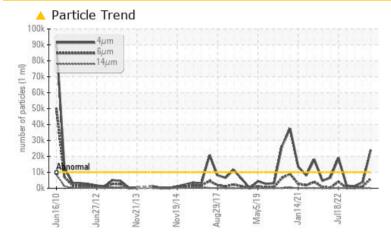

RECOMMENDATION

Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS								
Sample Status			ABNORMAL	NORMAL	NORMAL			
Particles >4µm	ASTM D7647	>10000	<u> </u>	3765	1109			
Particles >6µm	ASTM D7647	>2500	6097	993	297			
Oil Cleanliness	ISO 4406 (c)	>20/18/15	<u> </u>	19/17/13	17/15/11			

Customer Id: CARCOLNE Sample No.: USP0001708 Lab Number: 05967850 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

27 Feb 2023 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

07 Nov 2022 Diag: Doug Bogart

02 Aug 2022 Diag: Doug Bogart



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



NORMAL



Resample at the next service interval to monitor.All component wear rates are normal. There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT



ISO

FES CARCOL 8 (S/N 16L22L)

Refrigeration Compressor

USPI ALT-68 SC (--- GAL)

DIAGNOSIS

A Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

n.2010 Junit 21 Nord013 Nord014 Aug2017 Mark010 Junit022								
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2		
Sample Number		Client Info		USP0001708	USP246992	USP239261		
Sample Date		Client Info		02 Oct 2023	27 Feb 2023	07 Nov 2022		
Machine Age	hrs	Client Info		0	0	0		
Oil Age	hrs	Client Info		0	0	0		
Oil Changed		Client Info		N/A	N/A	N/A		
Sample Status				ABNORMAL	NORMAL	NORMAL		
WEAR METALS		method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>8	0	0	0		
Chromium	ppm	ASTM D5185m	>2	0	0	0		
Nickel	ppm	ASTM D5185m		0	0	0		
Titanium	ppm	ASTM D5185m		0	0	0		
Silver	ppm	ASTM D5185m	>2	0	0	0		
Aluminum	ppm	ASTM D5185m	>3	<1	0	0		
Lead	ppm	ASTM D5185m	>2	0	0	0		
Copper	ppm	ASTM D5185m	>8	0	0	0		
Tin	ppm	ASTM D5185m	>4	0	0	0		
Vanadium	ppm	ASTM D5185m		0	0	0		
Cadmium	ppm	ASTM D5185m		0	0	0		
ADDITIVES		method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		0	0	0		
Barium	ppm	ASTM D5185m		0	0	0		
Molybdenum	ppm	ASTM D5185m		0	0	0		
Manganese	ppm	ASTM D5185m		0	0	0		
Magnesium	ppm	ASTM D5185m		0	0	0		
Calcium	ppm	ASTM D5185m		<1	0	0		
Phosphorus	ppm	ASTM D5185m		0	<1	<1		
Zinc	ppm	ASTM D5185m		<1	0	0		
Sulfur	ppm	ASTM D5185m	50	0	0	0		
CONTAMINANTS		method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	2	1	1		
Sodium	ppm	ASTM D5185m		0	<1	0		
Potassium	ppm	ASTM D5185m	>20	<1	0	0		
Water	%	ASTM D6304	>0.01	0.004	0.003	0.003		
ppm Water	ppm	ASTM D6304	>100	44.9	36.4	31.7		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2		
Particles >4µm		ASTM D7647	>10000	<u> 23978</u>	3765	1109		
Particles >6µm		ASTM D7647	>2500	<u> </u>	993	297		
Particles >14µm		ASTM D7647	>320	106	49	20		
Particles >21µm		ASTM D7647	>80	17	8	3		
Particles >38µm		ASTM D7647	>20	2	1	0		
Particles >71µm		ASTM D7647	>4	0	0	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	22/20/14	19/17/13	17/15/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.013	0.015		



Acid Number

0.03

(B/H0)

Arial

0.00

250

20

<u>ال</u> 150

Nater 100

5

70


cSt (40°C)


60


5

OIL ANALYSIS REPORT

method

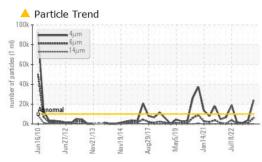

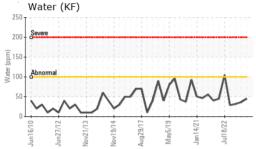

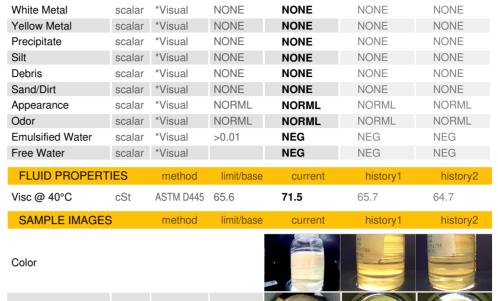

limit/base


current

history1

history2

Bottom

VISUAL

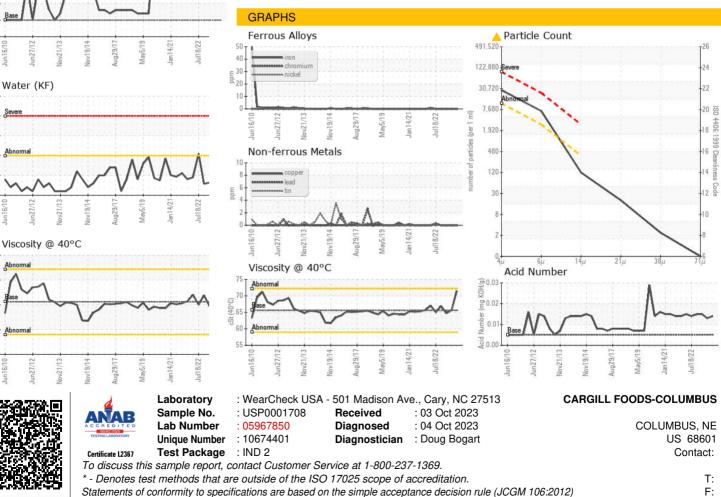

Page 4 of 4