

Area
NOT GIVEN

Machine Id
SULLIVAN PALATEK 02M018 - ARCHOR CONCRETE

Component
Compressor



DIAGNOSIS

Recommendation

We suspect abnormal contamination may be due to sampling method. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

| | | | | | |
|---------------|-------------|-------------|--------------------|-----|-----|
| Sample Number | Client Info | | UCS05967897 | --- | --- |
| Sample Date | Client Info | | 26 Sep 2023 | --- | --- |
| Machine Age | hrs | Client Info | 27370 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | | Client Info | N/A | --- | --- |
| Sample Status | | | NORMAL | --- | --- |

WEAR METALS method limit/base current history1 history2

| | | | | | | |
|----------|-----|-------------|-----|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >50 | 5 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m | | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >25 | <1 | --- | --- |
| Lead | ppm | ASTM D5185m | >25 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >50 | 6 | --- | --- |
| Tin | ppm | ASTM D5185m | >15 | 1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | --- | --- |

ADDITIVES method limit/base current history1 history2

| | | | | | | |
|------------|-----|-------------|--|--------------|-----|-----|
| Boron | ppm | ASTM D5185m | | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 2 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 11 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 308 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 0 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 378 | --- | --- |

CONTAMINANTS method limit/base current history1 history2

| | | | | | | |
|-----------|-----|-------------|-----|--------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >25 | 2 | --- | --- |
| Sodium | ppm | ASTM D5185m | | 0 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | <1 | --- | --- |



FLUID DEGRADATION method limit/base current history1 history2

| | | | | | | |
|------------------|----------|------------|--|--------------|-----|-----|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.089 | --- | --- |
|------------------|----------|------------|--|--------------|-----|-----|



VISUAL method limit/base current history1 history2

| | | | | | | |
|------------------|--------|---------|-------|--------------|-----|-----|
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | MODER | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |
| Free Water | scalar | *Visual | | NEG | --- | --- |



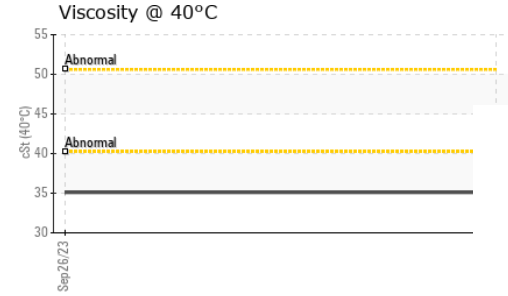
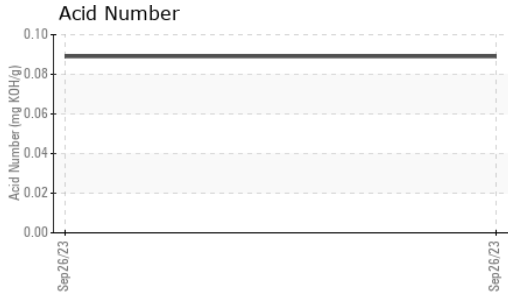
OIL ANALYSIS REPORT



| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 35.1 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---|----------|----------|
| Color | | |  | no image | no image |
| Bottom | | |  | no image | no image |

GRAPHS

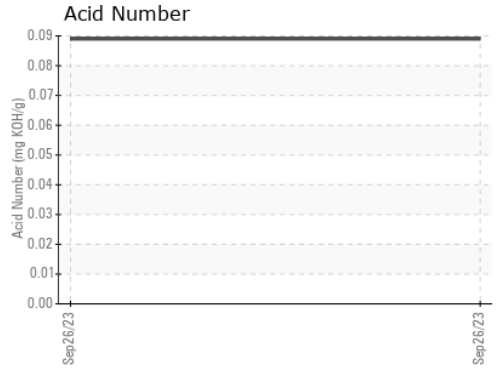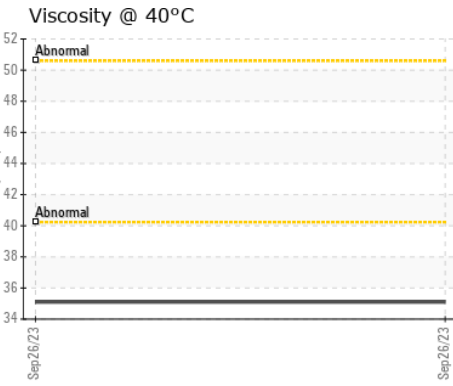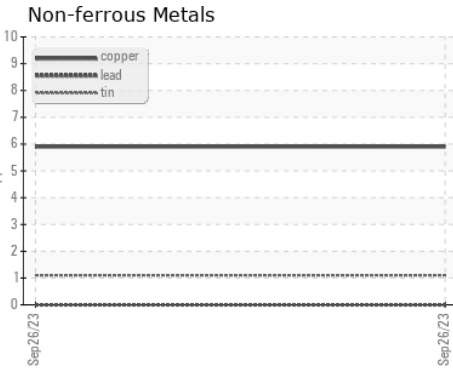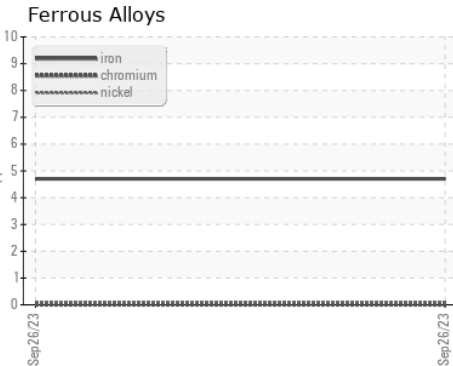

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCS05967897 **Received** : 03 Oct 2023
Lab Number : **05967897** **Diagnosed** : 05 Oct 2023
Unique Number : 10674448 **Diagnostician** : Jonathan Hester
Test Package : IND 2

DOWNFORCE AIR SOLUTIONS
 30 N 5TH ST
 LEMOYNE, PA
 US 17043
 Contact: ANDREW HOGUE
 andrewh@downforceair.com
 T: (717)891-3758
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)