
PROBLEM SUMMARY

Machine Id 9402743

Component Boom Winch Fluid GEAR OIL ISO 220 (--- GAL)

COMPONENT CONDITION SUMMARY

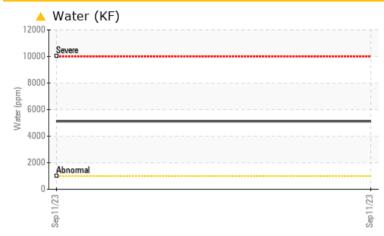

RECOMMENDATION

We advise that you check for the source of water entry. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS								
Sample Status				ABNORMAL				
Water	%	ASTM D6304	>0.1	A 0.512				
ppm Water	ppm	ASTM D6304	>1000	6 5120				
Appearance	scalar	*Visual	NORML	🔺 HAZY				
Free Water	scalar	*Visual		 1.0				


Customer Id: SEALAF Sample No.: WC0825738 Lab Number: 05967912 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

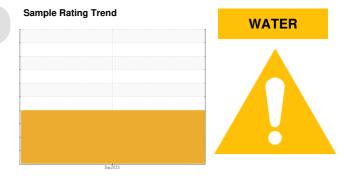

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Resample			?	We recommend an early resample to monitor this condition.		
Check Water Access			?	We advise that you check for the source of water entry.		

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



COX 9402743

Component Boom Winch Fluid GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

A Recommendation

We advise that you check for the source of water entry. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Appearance is hazy. Free water present. There is a moderate concentration of water present in the oil.

Fluid Condition

The AN level is acceptable for this fluid.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0825738		
Sample Date		Client Info		11 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	10		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	0		
Lead	ppm	ASTM D5185m	>100	2		
Copper	ppm	ASTM D5185m	>50	32		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
ADDITIVES Boron	ppm	method ASTM D5185m	limit/base	current 0	history1	history2
	ppm ppm					
Boron		ASTM D5185m	50	0		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	50 15	0 0		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	50 15	0 0 0		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 15 15	0 0 0 <1		
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 15 15 50	0 0 0 <1 2		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 15 15 50 50	0 0 <1 2 17	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 15 15 50 50 350	0 0 <1 2 17 328		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 15 15 50 50 350 100	0 0 2 <1 2 17 328 291	 	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 15 15 50 50 350 100 12500	0 0 2 1 2 17 328 291 869		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 15 15 50 50 350 100 12500	0 0 2 3 3 2 17 328 291 869 current	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	50 15 15 50 50 350 100 12500 limit/base	0 0 2 4 2 17 328 291 869 current 2	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	50 15 15 50 50 350 100 12500 Imit/base >50	0 0 2 -1 2 17 328 291 869 <u>current</u> 2 -	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	50 15 15 50 350 350 100 12500 limit/base >50	0 0 2 1 2 17 328 291 869 current 2 2 <1 <1	 history1	 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	50 15 15 50 350 350 100 12500 limit/base >50 >20 >0.1	0 0 2 41 2 17 328 291 869 current 2 2 <1 <1 <1 ▲ 0.512	 history1	 history2



OIL ANALYSIS REPORT

method


limit/base


current


history1


history2

VISUAL

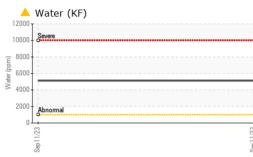

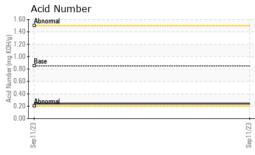

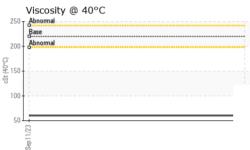

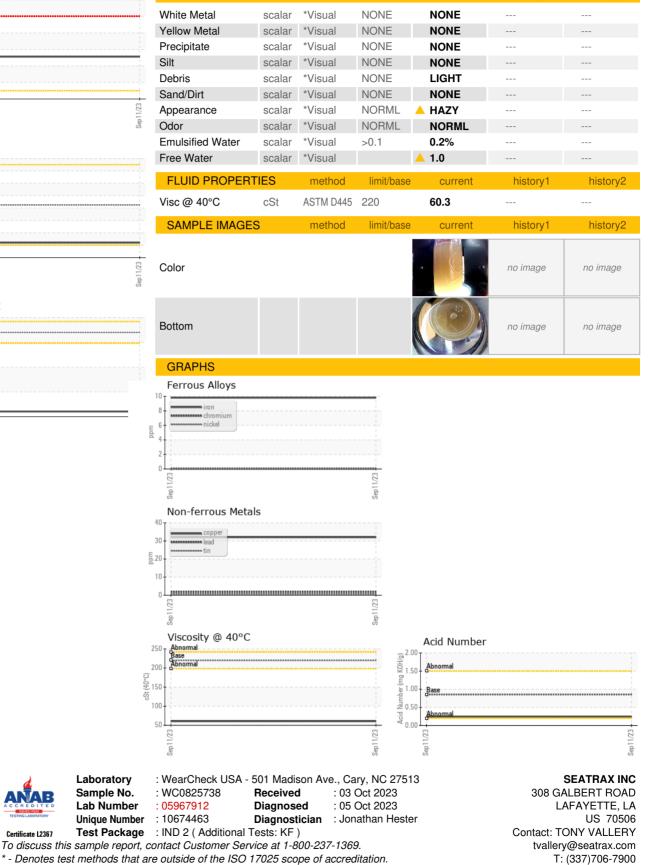

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

ø

Laboratory

Sample No.

Contact/Location: TONY VALLERY - SEALAF

F: (337)706-7901