




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
JENBACHER GM01 (S/N 1144716)
 Component
Biogas Engine
 Fluid
MAHLER Q8 Mahler G8 SAE 40 (--- GAL)

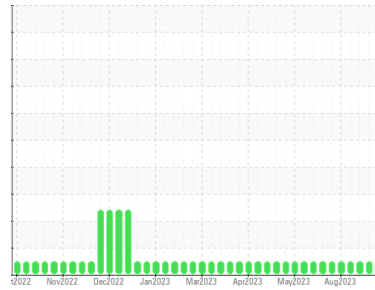

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	WC0835607	WC0835606	WC0835618	
Sample Date	Client Info	02 Oct 2023	25 Sep 2023	11 Sep 2023	
Machine Age	hrs	Client Info	48662	48494	48184
Oil Age	hrs	Client Info	3197	144	2719
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >4.0	<1.0	<1.0	<1.0
Water	WC Method >.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<1	2	13
Chromium	ppm ASTM D5185m >5	<1	0	<1
Nickel	ppm ASTM D5185m >2	0	0	0
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >5	<1	0	0
Aluminum	ppm ASTM D5185m >15	2	<1	3
Lead	ppm ASTM D5185m >20	<1	0	0
Copper	ppm ASTM D5185m >15	<1	<1	2
Tin	ppm ASTM D5185m >5	2	1	7
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	0	0
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	<1	1	0
Manganese	ppm ASTM D5185m	<1	0	<1
Magnesium	ppm ASTM D5185m	13	9	13
Calcium	ppm ASTM D5185m	2158	2192	2516
Phosphorus	ppm ASTM D5185m	433	445	455
Zinc	ppm ASTM D5185m	501	493	549
Sulfur	ppm ASTM D5185m	2414	2497	3212

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >200	8	9	44
Sodium	ppm ASTM D5185m >20	<1	1	5
Potassium	ppm ASTM D5185m >20	1	1	3

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >2	0	0	0.1
Nitration	Abs/cm *ASTM D7624 >20	6.0	6.0	8.2
Sulfation	Abs/.1mm *ASTM D7415 >30	15.1	15.6	19.8

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	9.7	10.0	16.0
Acid Number (AN)	mg KOH/g ASTM D8045	0.84	0.29	1.57
Base Number (BN)	mg KOH/g ASTM D2896 8.0	8.38	7.99	6.03











OIL ANALYSIS REPORT

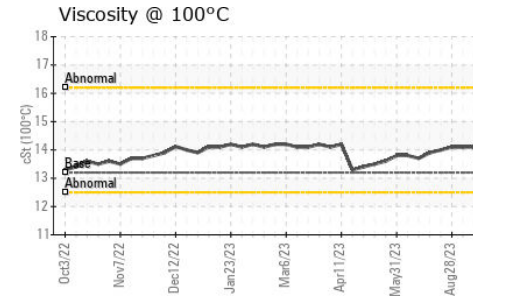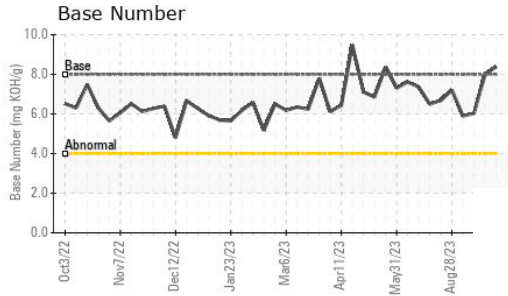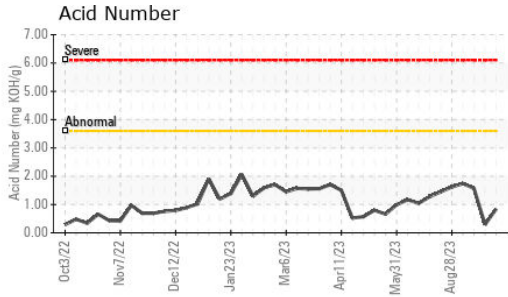

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	13.2	13.3	13.1	14.1

GRAPHS

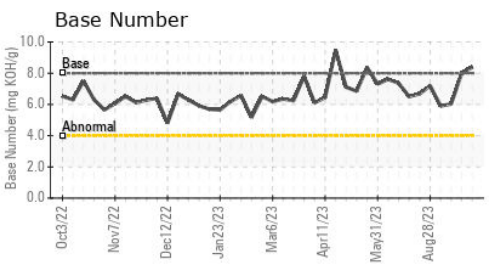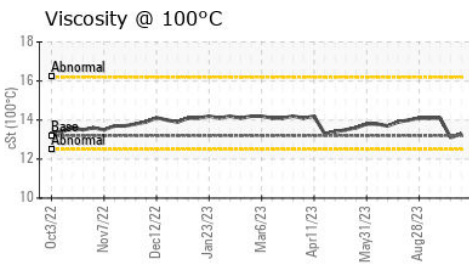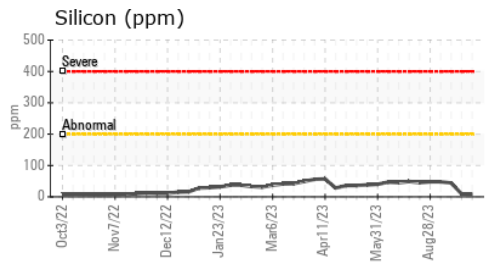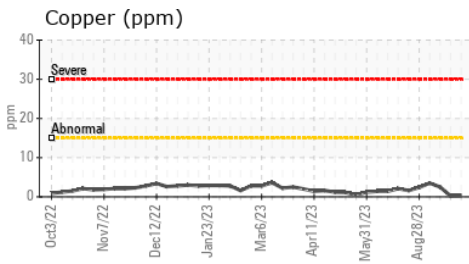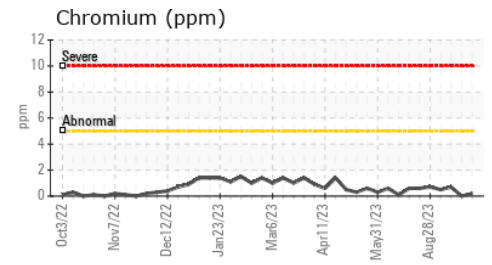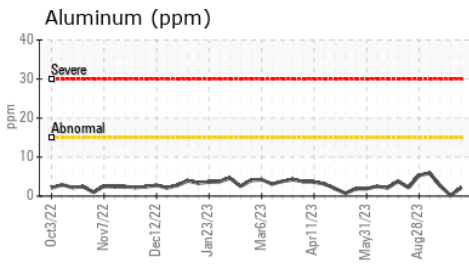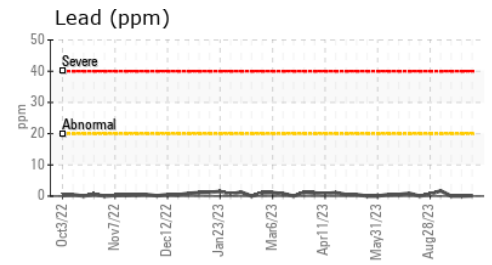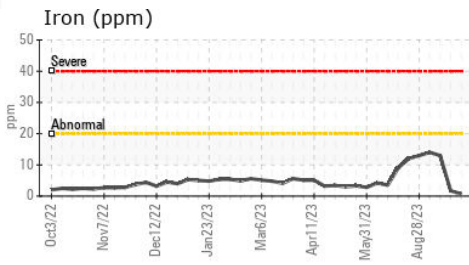

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0835607 **Received** : 03 Oct 2023
Lab Number : **05967918** **Diagnosed** : 05 Oct 2023
Unique Number : 10674469 **Diagnostician** : Don Baldrige
Test Package : MOB 2

PINE RIDGE
 105 BAILEY JESTER RD
 GRIFFIN, GA
 US 30224
 Contact: STEPHEN SAVAGE
 stephen.savage@cubedistrictenergy.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)