

FUEL REPORT

Sample Rating Trend





SPACE X JRTI DECK

Rear Diesel Fuel

DDSL (45000 GAL)

Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

Corrosion

All metal levels are normal indicating no corrosion in the system.

Contaminants

The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel.


Fuel Condition

Sulfur value derived by ASTM D5453 method for ULSD validation.

| | | | Jun 2023 | Sep2023 | | |
|---------------|--------|-------------|------------|-------------|-------------|----------|
| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WCDF4478 | WC05901760 | |
| Sample Date | | Client Info | | 27 Sep 2023 | 30 Jun 2023 | |
| Machine Age | mls | Client Info | | 0 | 0 | |
| Sample Status | | | | NORMAL | NORMAL | |
| PHYSICAL PROP | ERTIES | method | limit/base | current | history1 | history2 |
| ASTM Color | scalar | *ASTM D1500 | | L4.5 | L4.5 | |
| Visc @ 40°C | cSt | ASTM D445 | | 3.18 | 3.17 | |
| SULFUR CONTEN | ٧T | method | limit/base | current | history1 | history2 |
| Sulfur | ppm | ASTM D5185m | | 376 | 463 | |
| Sulfur (UVF) | ppm | ASTM D5453 | | 284 | 331 | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | <1.0 | 1 | 0 | |
| Sodium | ppm | ASTM D5185m | <0.1 | 0 | 0 | |
| Potassium | ppm | ASTM D5185m | < 0.1 | <1 | 0 | |
| Water | % | ASTM D6304 | < 0.05 | 0.003 | 0.003 | |
| ppm Water | ppm | ASTM D6304 | < 500 | 32.0 | 35.3 | |
| % Gasoline | % | *In-House | < 0.50 | 0.0 | 0.0 | |
| % Biodiesel | % | *In-House | <20.0 | 0.0 | 0.0 | |
| HEAVY METALS | | method | limit/base | current | history1 | history2 |
| Aluminum | ppm | ASTM D5185m | < 0.1 | 0 | <1 | |
| Nickel | ppm | ASTM D5185m | <0.1 | 0 | 0 | |
| Lead | ppm | ASTM D5185m | < 0.1 | 0 | 0 | |
| Vanadium | ppm | ASTM D5185m | < 0.1 | 0 | <1 | |
| Iron | ppm | ASTM D5185m | <0.1 | 0 | 0 | |
| Calcium | ppm | ASTM D5185m | | 0 | 0 | |
| Magnesium | ppm | ASTM D5185m | <0.1 | 0 | <1 | |
| Phosphorus | ppm | ASTM D5185m | <0.1 | 3 | <1 | |
| Zinc | ppm | ASTM D5185m | <0.1 | 0 | 0 | |
| SAMPLE IMAGES | ; | method | limit/base | current | history1 | history2 |
| Color | | | | | | no image |
| Bottom | | | | | | no image |



FUEL REPORT

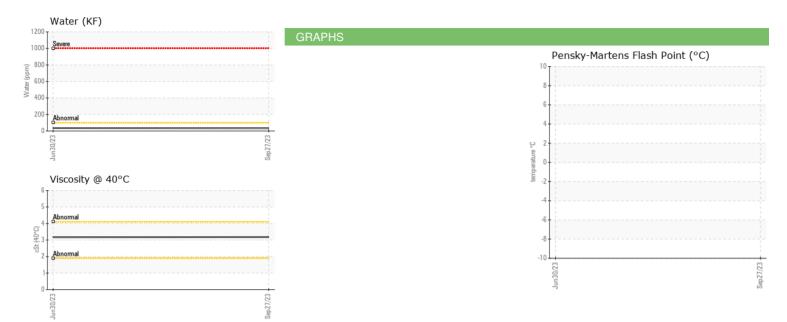



Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10674735

: WCDF4478 : 05968184

To discuss this sample report, contact Customer Service at 1-800-237-1369.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 03 Oct 2023 Received Diagnosed : 10 Oct 2023

Diagnostician : Doug Bogart **Test Package**: DF-5 (Additional Tests: Screen, Sulphur-Active)

TANK WIZARDS 1511 MASTERS RD NW PALM BAY, FL US 32907

Contact: WENDALL STRODERD wendall@tankwizards.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: (321)427-5149 F: (321)574-4131