




# PROBLEM SUMMARY

Area  
**Store 6 - Ashland [143776]**  
 Machine Id  
**JOHN DEERE 26G 1FF026GXCPK269310**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (4 QTS)**

Sample Rating Trend

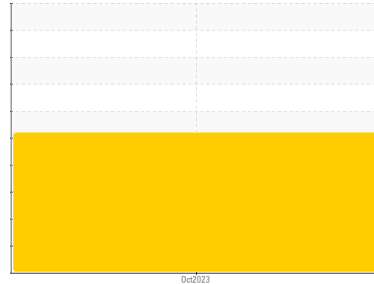


**DIRT**




## COMPONENT CONDITION SUMMARY

**● Silicon (ppm)**

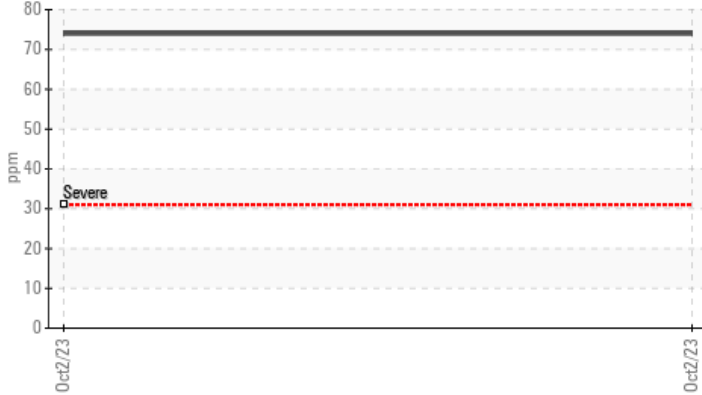

**▲ Viscosity @ 100°C**

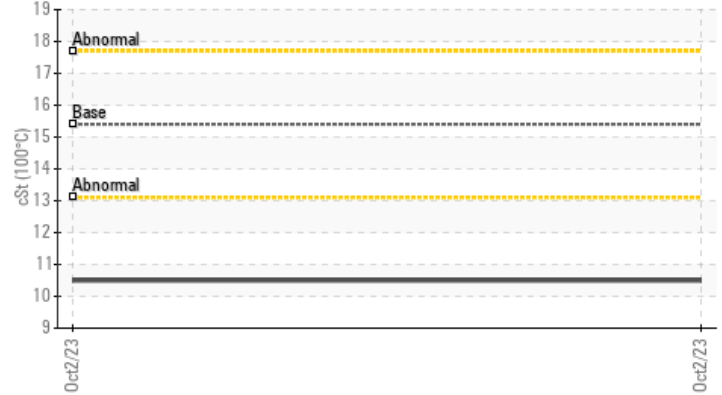

## RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>SEVERE</b>	---	---
Silicon	ppm	ASTM D5185m	>120	<b>74</b>	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>10.5</b>	---	---

Customer Id: LESMAROH  
 Sample No.: LEC0043492  
 Lab Number: 05968275  
 Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
 Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend

DIRT

Area

Store 6 - Ashland [143776]

Machine Id


JOHN DEERE 26G 1FF026GXCPK269310

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (4 QTS)

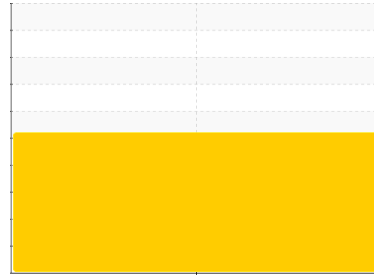

## DIAGNOSIS

### Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend an early resample to monitor this condition.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of dirt/seal material.

### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		LEC0043492	---	---
Sample Date	Client Info		02 Oct 2023	---	---
Machine Age	hrs	Client Info	100	---	---
Oil Age	hrs	Client Info	100	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			SEVERE	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >51	29	---	---
Chromium	ppm	ASTM D5185m >11	<1	---	---
Nickel	ppm	ASTM D5185m >5	<1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >3	0	---	---
Aluminum	ppm	ASTM D5185m >31	5	---	---
Lead	ppm	ASTM D5185m >26	<1	---	---
Copper	ppm	ASTM D5185m >26	13	---	---
Tin	ppm	ASTM D5185m >4	<1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	45	---	---
Barium	ppm	ASTM D5185m	7	---	---
Molybdenum	ppm	ASTM D5185m	108	---	---
Manganese	ppm	ASTM D5185m	2	---	---
Magnesium	ppm	ASTM D5185m	45	---	---
Calcium	ppm	ASTM D5185m	3721	---	---
Phosphorus	ppm	ASTM D5185m	1117	---	---
Zinc	ppm	ASTM D5185m	1364	---	---
Sulfur	ppm	ASTM D5185m	6677	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >120	74	---	---
Sodium	ppm	ASTM D5185m >31	20	---	---
Potassium	ppm	ASTM D5185m >20	3	---	---
Fuel	%	ASTM D3524 >2.1	1.3	---	---


## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624 >20	5.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	15.2	---	---


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	8.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 13.6	11.2	---	---


# OIL ANALYSIS REPORT

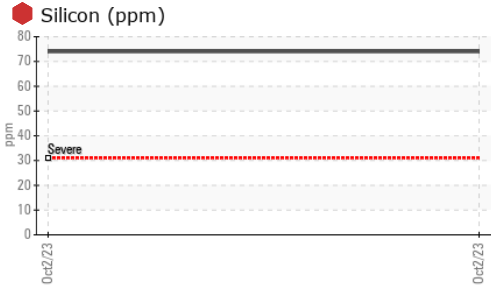






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

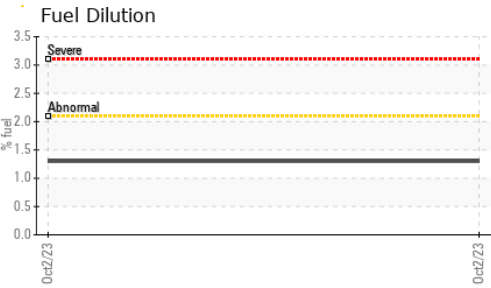

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.5	---	---

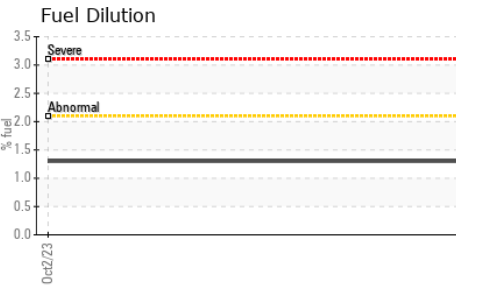

## GRAPHS

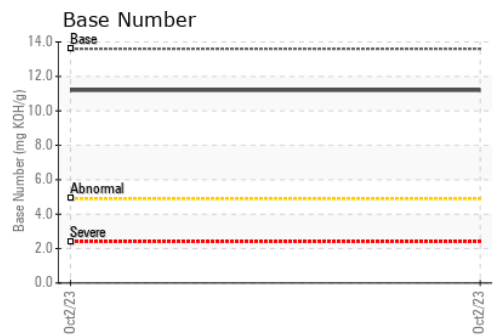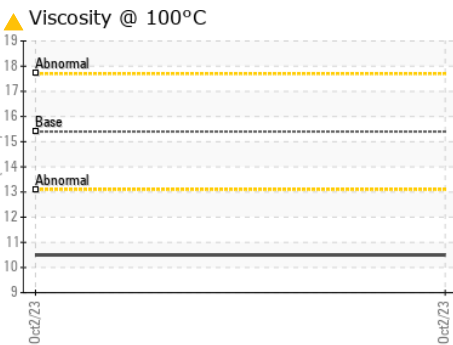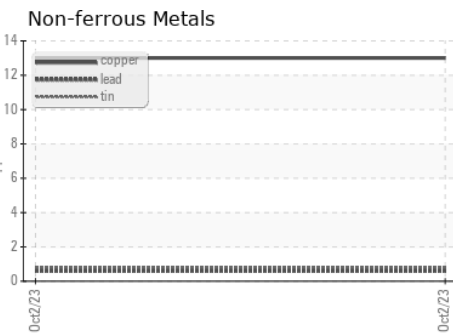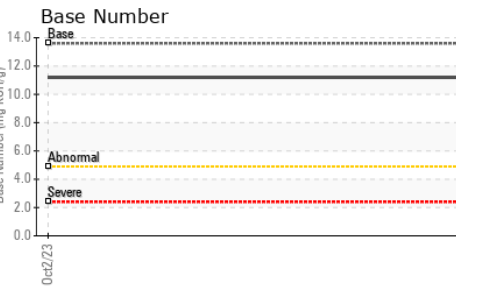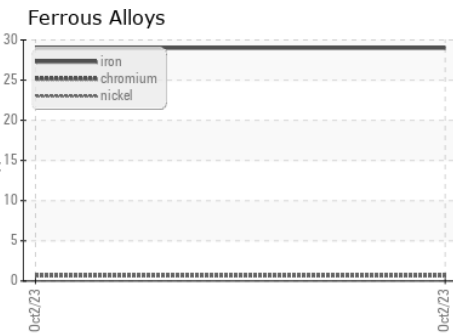

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0043492 **Received** : 03 Oct 2023  
**Lab Number** : 05968275 **Diagnosed** : 05 Oct 2023  
**Unique Number** : 10674826 **Diagnostician** : Doug Bogart  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (740)373-5570