




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

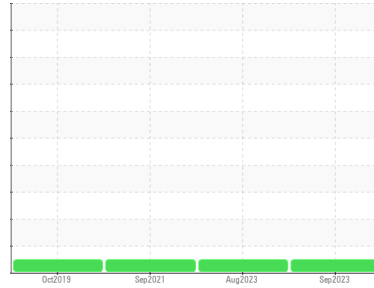

Machine Id  
**OUT STANDING (S/N 46325061)**

Component  
**Port Main Engine**

Fluid  
**VALVOLINE PREMIUM BLUE 2000 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0850534</b>	WC0850538	WC0622725
Sample Date	Client Info		<b>29 Sep 2023</b>	24 Aug 2023	21 Sep 2021
Machine Age	hrs	Client Info	<b>610</b>	630	550
Oil Age	hrs	Client Info	<b>60</b>	60	100
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>38</b>	36	45
Chromium	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >2	<b>2</b>	1	2
Titanium	ppm	ASTM D5185m >3	<b>3</b>	7	7
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >15	<b>1</b>	4	7
Lead	ppm	ASTM D5185m >18	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >80	<b>18</b>	15	36
Tin	ppm	ASTM D5185m >14	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>51</b>	48	38
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>51</b>	49	56
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>734</b>	716	706
Calcium	ppm	ASTM D5185m	<b>1683</b>	1624	1517
Phosphorus	ppm	ASTM D5185m	<b>1101</b>	1095	1019
Zinc	ppm	ASTM D5185m	<b>1366</b>	1335	1194
Sulfur	ppm	ASTM D5185m	<b>3338</b>	4074	2550

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>8</b>	8	7
Sodium	ppm	ASTM D5185m >75	<b>6</b>	4	4
Potassium	ppm	ASTM D5185m >20	<b>3</b>	<1	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.2</b>	0.2	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	7.6	9.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.9</b>	18.3	19.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.2</b>	15.5	16.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.0	<b>9.6</b>	9.1	9.6







# OIL ANALYSIS REPORT

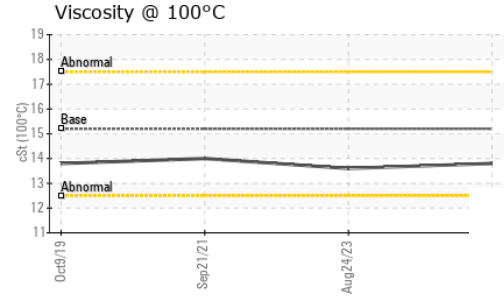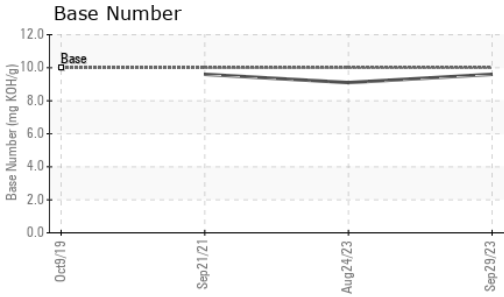

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.2	<b>13.8</b>	13.6	14.0

### GRAPHS

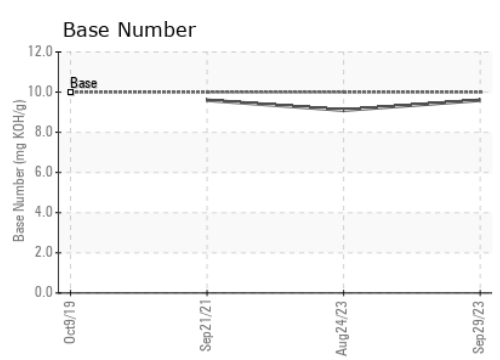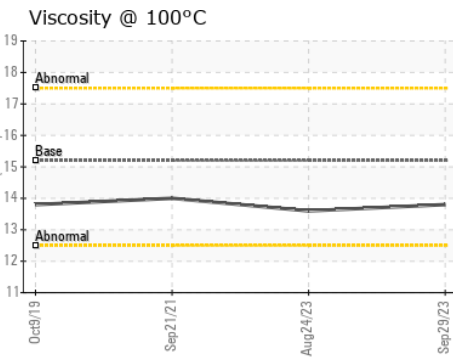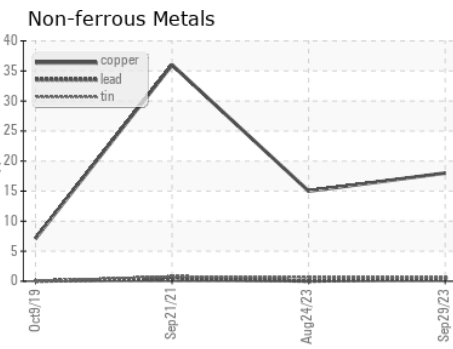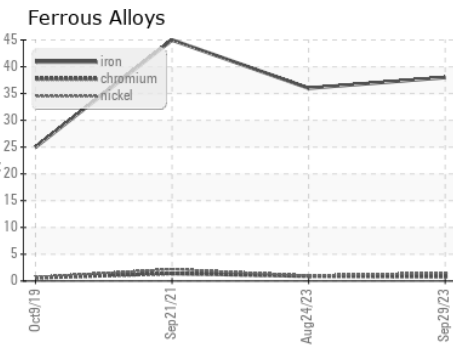

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0850534 **Received** : 04 Oct 2023  
**Lab Number** : **05968568** **Diagnosed** : 05 Oct 2023  
**Unique Number** : 10675119 **Diagnostician** : Don Baldrige  
**Test Package** : MAR 2

**JOSEPH DIDONATO**  
 1401 PARK LANE ROAD  
 SWARTHMORE, PA  
 US 19081  
 Contact: JOSEPH DIDONATO  
 jdidonato333@gmail.com  
 T: (610)742-1336  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)