

PROBLEM SUMMARY

Sample Rating Trend




WEAR



Machine Id
JOHN DEERE 624 P 1DW624PACPLX19397
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Non-ferrous Metals

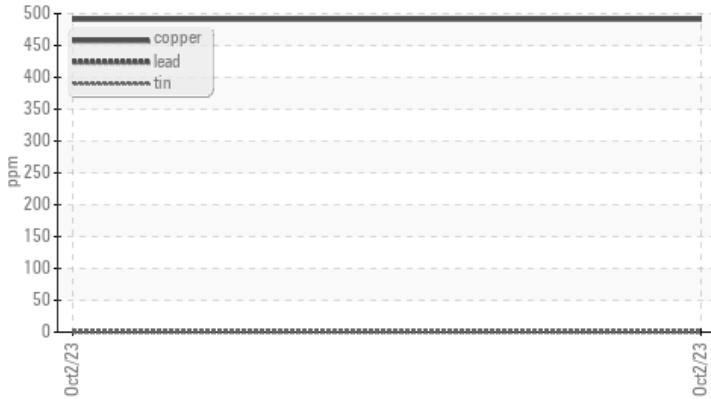

▲ Viscosity @ 100°C



RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

| Sample Status | ABNORMAL | | --- | --- |
|---------------|----------|-----------------|-------|-----|
| Copper | ppm | ASTM D5185m >26 | ▲ 491 | --- |
| Visc @ 100°C | cSt | ASTM D445 15.4 | ▲ 9.8 | --- |

Customer Id: JAMASH
Sample No.: JR0179320
Lab Number: 05968682
Test Package: CONST



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------|--------|------|---------|---|
| Change Fluid | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |
| Change Filter | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |


HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend

WEAR


Machine Id
JOHN DEERE 624 P 1DW624PACPLX19397
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

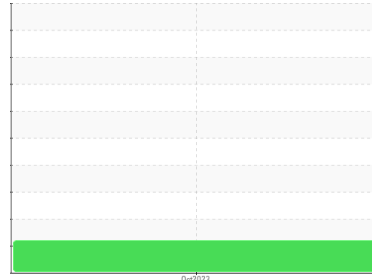

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | JR0179320 | --- | --- |
| Sample Date | Client Info | | 02 Oct 2023 | --- | --- |
| Machine Age | hrs | Client Info | 456 | --- | --- |
| Oil Age | hrs | Client Info | 456 | --- | --- |
| Oil Changed | Client Info | | Changed | --- | --- |
| Sample Status | | | ABNORMAL | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >51 | 24 | --- | --- |
| Chromium | ppm | ASTM D5185m >11 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m >5 | 1 | --- | --- |
| Titanium | ppm | ASTM D5185m | <1 | --- | --- |
| Silver | ppm | ASTM D5185m >3 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m >31 | 6 | --- | --- |
| Lead | ppm | ASTM D5185m >26 | 1 | --- | --- |
| Copper | ppm | ASTM D5185m >26 | ▲ 491 | --- | --- |
| Tin | ppm | ASTM D5185m >4 | 3 | --- | --- |
| Vanadium | ppm | ASTM D5185m | <1 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|-------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m | 216 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 252 | --- | --- |
| Manganese | ppm | ASTM D5185m | 6 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 884 | --- | --- |
| Calcium | ppm | ASTM D5185m | 1430 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 972 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1153 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 3174 | --- | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|------------|----------|----------|
| Silicon | ppm | ASTM D5185m >22 | 12 | --- | --- |
| Sodium | ppm | ASTM D5185m >31 | 4 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 2 | --- | --- |
| Fuel | % | ASTM D3524 >2.1 | 1.0 | --- | --- |
| Glycol | % | *ASTM D2982 | NEG | --- | --- |






INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.2 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 >20 | 8.3 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 21.0 | --- | --- |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 15.9 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 13.6 | 8.5 | --- | --- |





OIL ANALYSIS REPORT

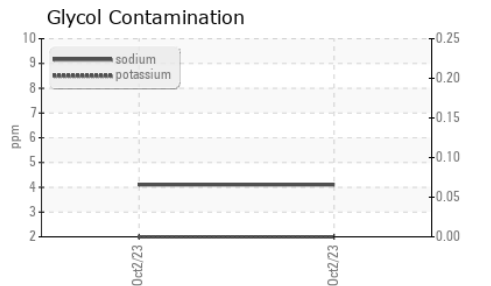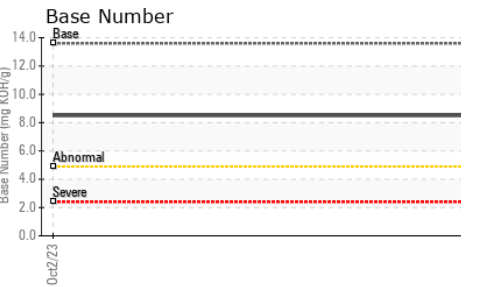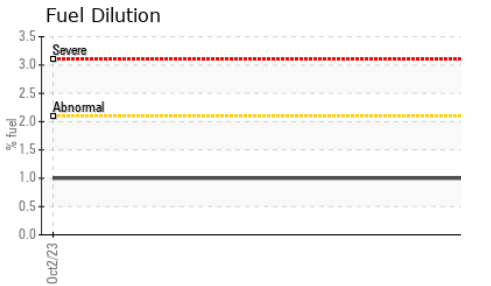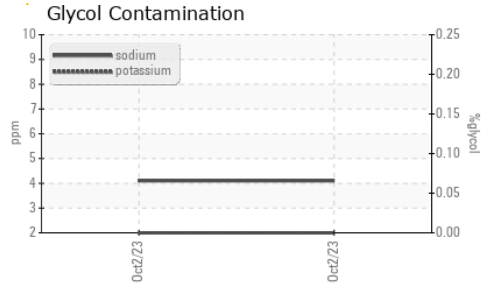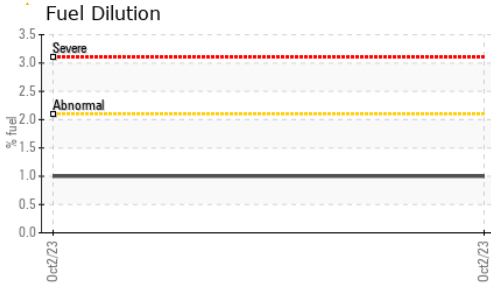

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ▲ 9.8 | --- |

GRAPHS

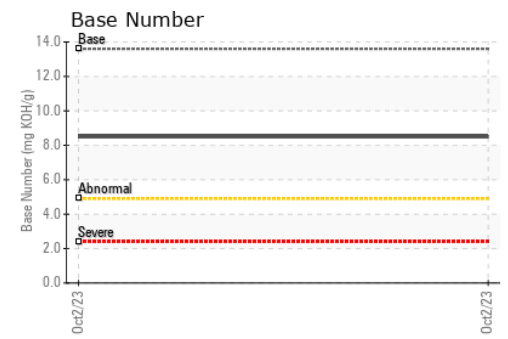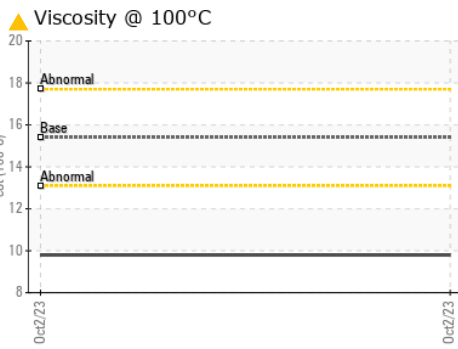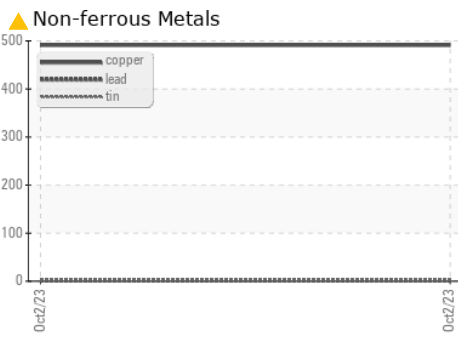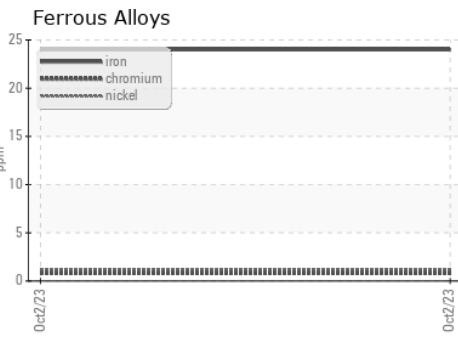

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0179320 **Received** : 04 Oct 2023
Lab Number : 05968682 **Diagnosed** : 06 Oct 2023
Unique Number : 10675233 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, Glycol, PercentFuel, TBN)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)