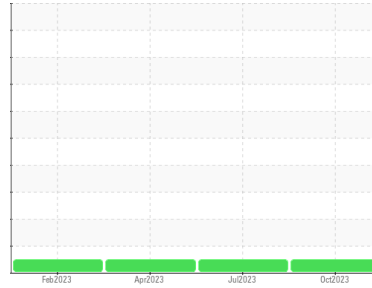


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

 Machine Id  
**JOHN DEERE 410E 1DW410ELLPF716386**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (--- GAL)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>JR0179324</b>	JR0164935	JR0147628
Sample Date	Client Info		<b>03 Oct 2023</b>	13 Jul 2023	24 Apr 2023
Machine Age	hrs	Client Info	<b>1983</b>	1470	1002
Oil Age	hrs	Client Info	<b>1983</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

**WEAR METALS**

	method	limit/base	current	history1	history2	
PQ	ASTM D8184	>50	<b>12</b>	12	12	
Iron	ppm	ASTM D5185m	>71	<b>6</b>	4	2
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m	>6	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>11	<b>4</b>	2	1
Lead	ppm	ASTM D5185m	>13	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>21	<b>1</b>	<1	0
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>3</b>	2	0
Calcium	ppm	ASTM D5185m	87	<b>96</b>	104	95
Phosphorus	ppm	ASTM D5185m	727	<b>654</b>	650	658
Zinc	ppm	ASTM D5185m	900	<b>912</b>	879	919
Sulfur	ppm	ASTM D5185m	1500	<b>1965</b>	1817	1713

**CONTAMINANTS**

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>24	<b>4</b>	2	1
Sodium	ppm	ASTM D5185m	>21	<b>2</b>	0	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0






**FLUID CLEANLINESS**

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>80000	<b>1994</b>	776	1084
Particles >6µm	ASTM D7647	>5000	<b>488</b>	293	454
Particles >14µm	ASTM D7647	>640	<b>38</b>	32	42
Particles >21µm	ASTM D7647	>160	<b>12</b>	7	9
Particles >38µm	ASTM D7647	>40	<b>0</b>	0	0
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>23/19/16	<b>18/16/12</b>	17/15/12	17/16/13

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	<b>0.74</b>	0.78	0.71


# OIL ANALYSIS REPORT

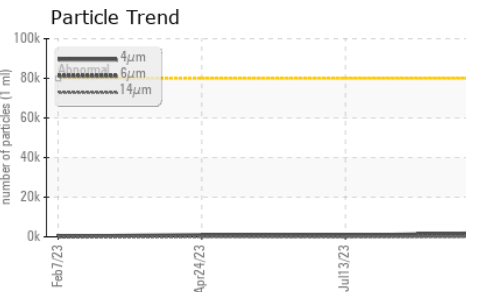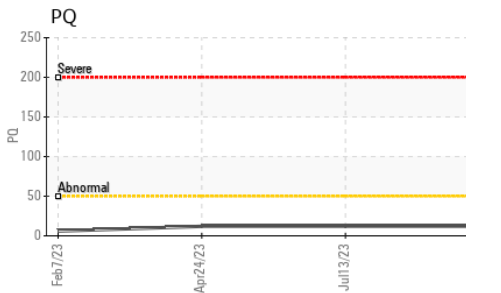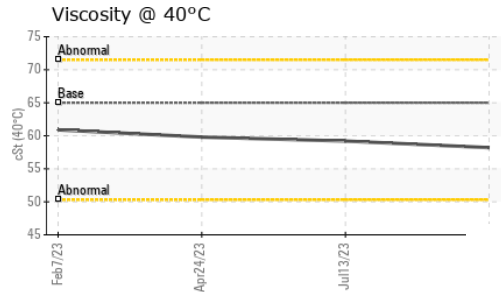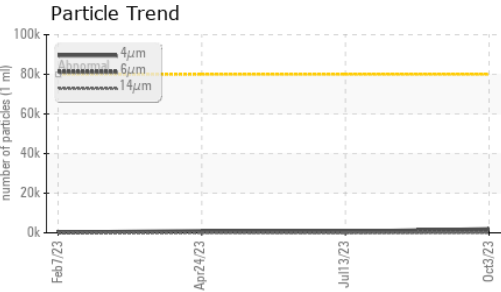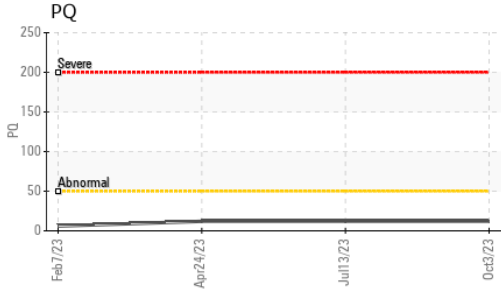






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 65	<b>58.2</b>	59.2	59.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

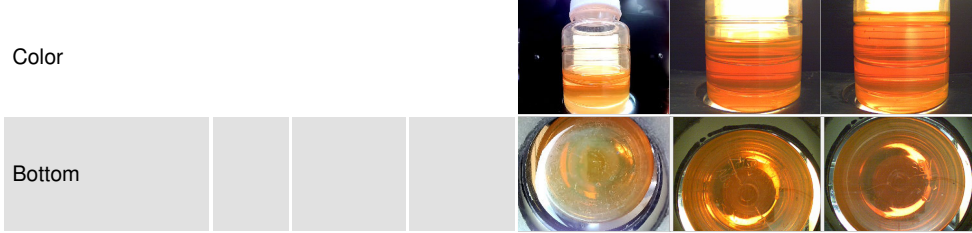

## GRAPHS

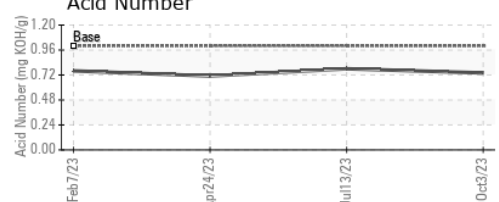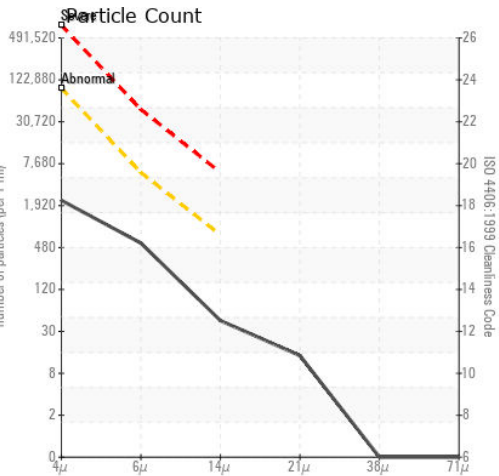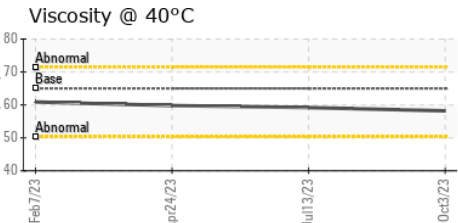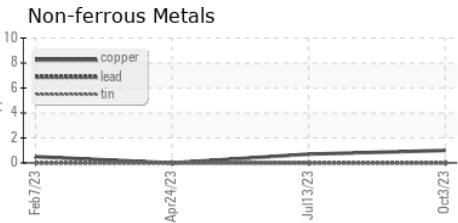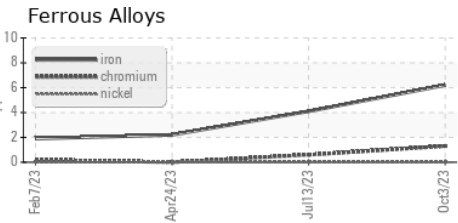

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0179324      **Received** : 04 Oct 2023  
**Lab Number** : 05968838      **Diagnosed** : 05 Oct 2023  
**Unique Number** : 10675389      **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)