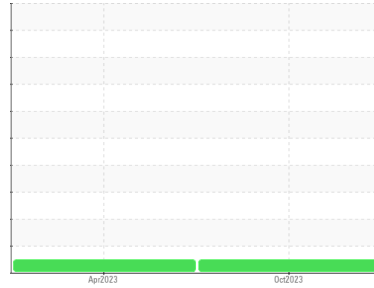


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area

**[W46924]**

Machine Id

**JOHN DEERE 850L 1T0850LXKPF437810**

Component

**Hydraulic System**

Fluid

**JOHN DEERE HYDRAU (--- GAL)**
**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>JR0179348</b>	JR0166201	---
Sample Date	Client Info		<b>03 Oct 2023</b>	11 Apr 2023	---
Machine Age	hrs	Client Info	<b>946</b>	458	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

**WEAR METALS**

	method	limit/base	current	history1	history2
PQ	ASTM D8184		<b>11</b>	10	---
Iron	ppm	ASTM D5185m >20	<b>3</b>	<1	---
Chromium	ppm	ASTM D5185m >10	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m >10	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >10	<b>3</b>	0	---
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >75	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m >10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>1</b>	4	---
Calcium	ppm	ASTM D5185m 87	<b>84</b>	93	---
Phosphorus	ppm	ASTM D5185m 727	<b>648</b>	678	---
Zinc	ppm	ASTM D5185m 900	<b>888</b>	903	---
Sulfur	ppm	ASTM D5185m 1500	<b>1883</b>	2089	---

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	<1	---
Sodium	ppm	ASTM D5185m	<b>1</b>	1	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3	---





**FLUID CLEANLINESS**

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>1109</b>	597	---
Particles >6µm	ASTM D7647	>1300	<b>113</b>	110	---
Particles >14µm	ASTM D7647	>160	<b>10</b>	6	---
Particles >21µm	ASTM D7647	>40	<b>3</b>	2	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	0	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>17/14/10</b>	16/14/10	---

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.72</b>	0.77	---


# OIL ANALYSIS REPORT

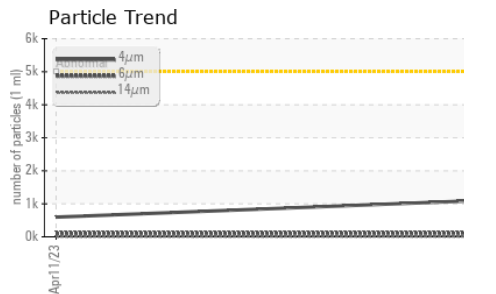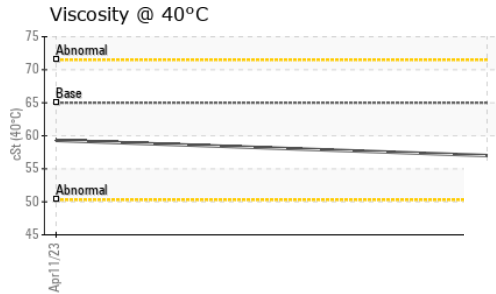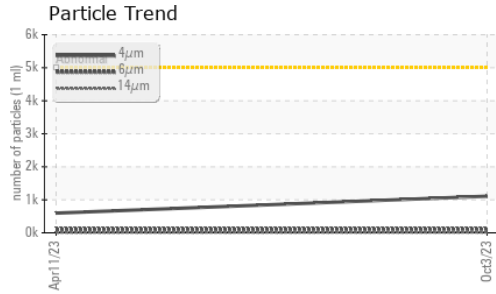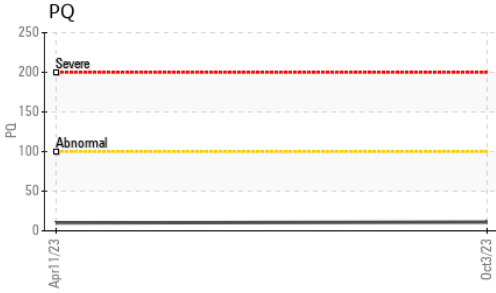






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 65	57.0	59.3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

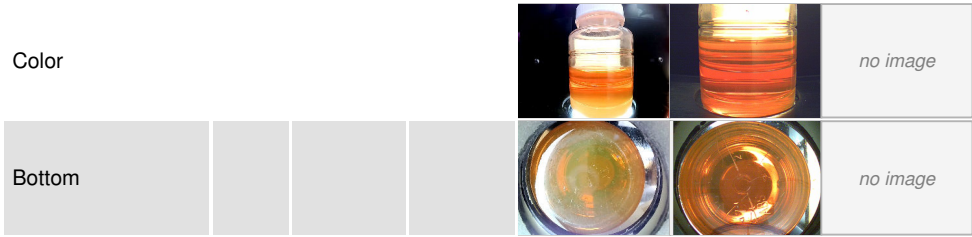

## GRAPHS

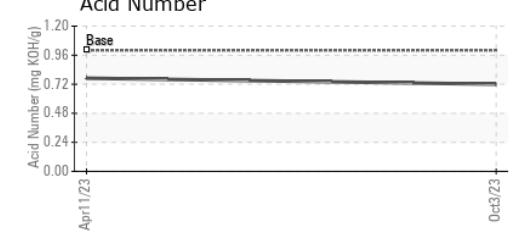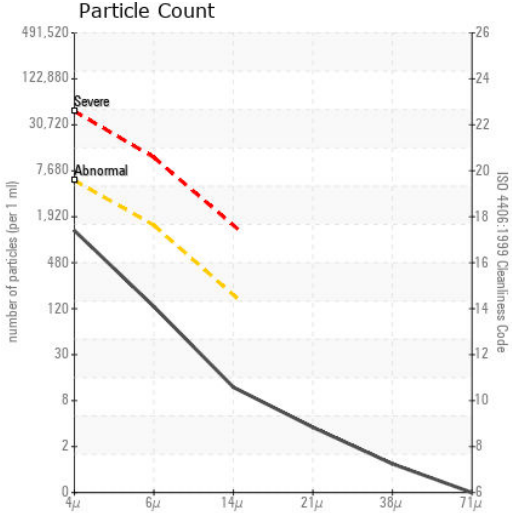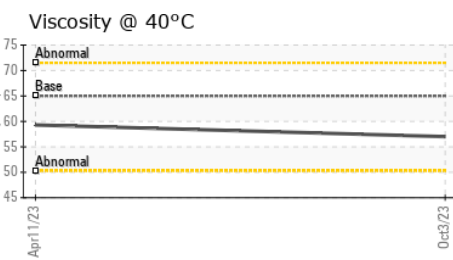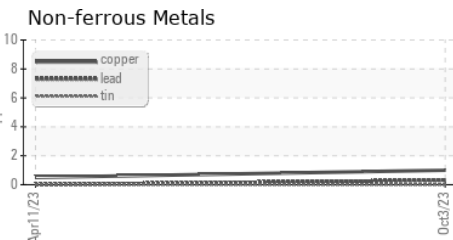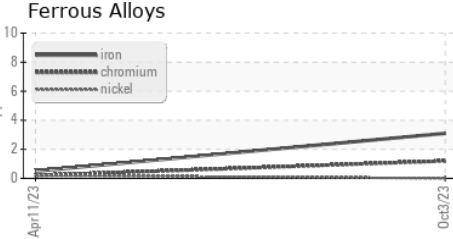

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0179348 **Received** : 04 Oct 2023  
**Lab Number** : 05968840 **Diagnosed** : 05 Oct 2023  
**Unique Number** : 10675391 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292