



OIL ANALYSIS REPORT

Sample Rating Trend



DIRT



Machine Id
900C TEST STAND

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Elemental level of silicon (Si) above normal. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	RH0001914	RH0001701	---
Sample Date	Client Info	02 Oct 2023	25 May 2023	---
Machine Age	hrs	Client Info	2131	2059
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	9	8	---
Iron	ppm	ASTM D5185m >20	1	1
Chromium	ppm	ASTM D5185m >10	<1	0
Nickel	ppm	ASTM D5185m >10	0	0
Titanium	ppm	ASTM D5185m	0	0
Silver	ppm	ASTM D5185m	0	0
Aluminum	ppm	ASTM D5185m >10	2	<1
Lead	ppm	ASTM D5185m >10	2	<1
Copper	ppm	ASTM D5185m >75	38	22
Tin	ppm	ASTM D5185m >10	<1	<1
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	<1	<1
Barium	ppm	ASTM D5185m 5	0	0
Molybdenum	ppm	ASTM D5185m 5	1	1
Manganese	ppm	ASTM D5185m	<1	<1
Magnesium	ppm	ASTM D5185m 25	5	4
Calcium	ppm	ASTM D5185m 200	99	100
Phosphorus	ppm	ASTM D5185m 300	389	380
Zinc	ppm	ASTM D5185m 370	103	84
Sulfur	ppm	ASTM D5185m 2500	791	779

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	▲ 37	▲ 34
Sodium	ppm	ASTM D5185m	3	2
Potassium	ppm	ASTM D5185m >20	2	1






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	1839	194
Particles >6µm	ASTM D7647	>1300	291	60
Particles >14µm	ASTM D7647	>160	15	4
Particles >21µm	ASTM D7647	>40	3	1
Particles >38µm	ASTM D7647	>10	1	0
Particles >71µm	ASTM D7647	>3	0	0
Oil Cleanliness	ISO 4406 (c)	>19/17/14	18/15/11	15/13/9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.16	0.18


OIL ANALYSIS REPORT

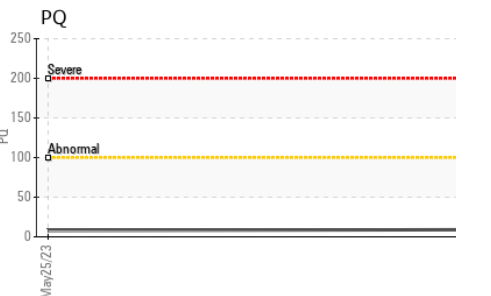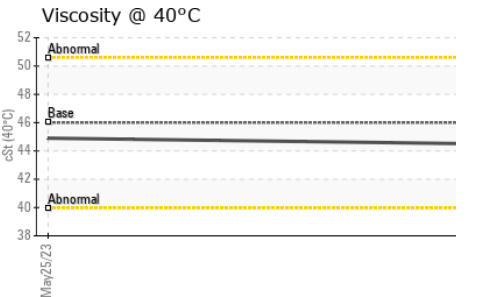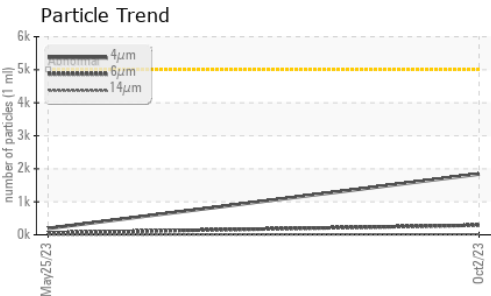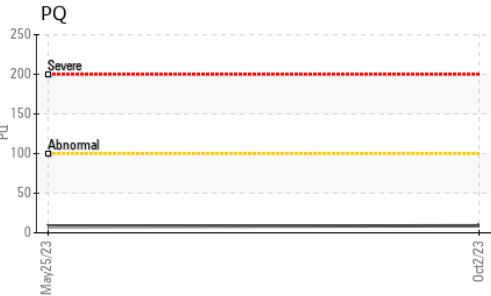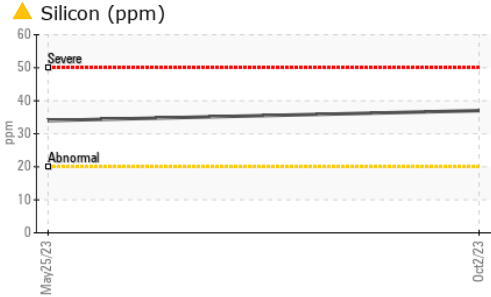





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.5	44.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

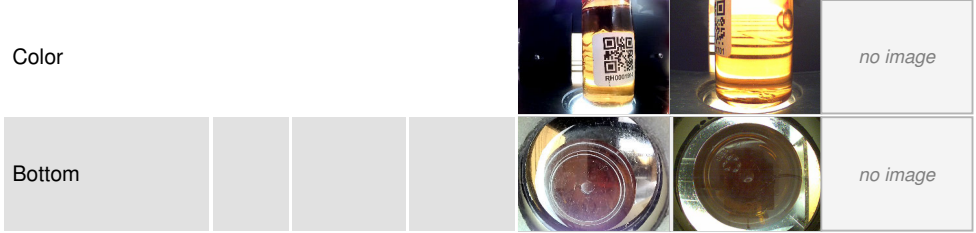

GRAPHS

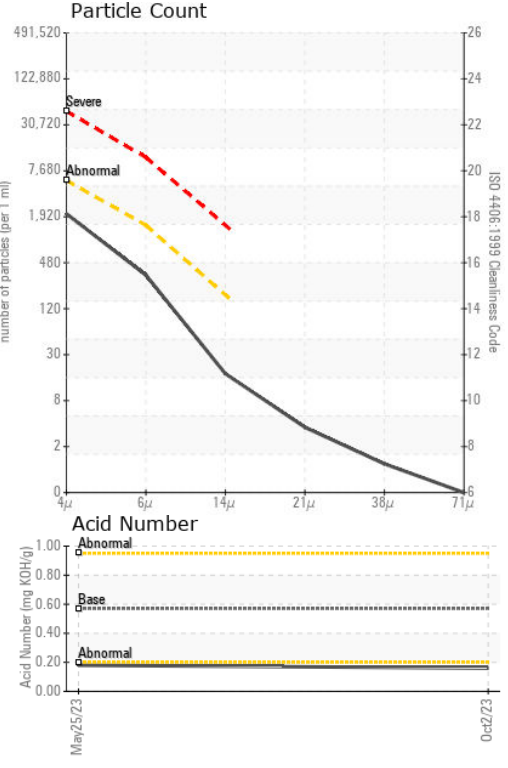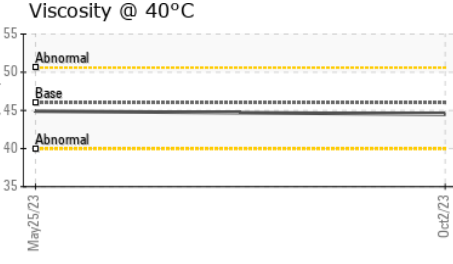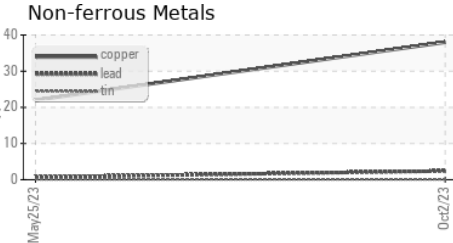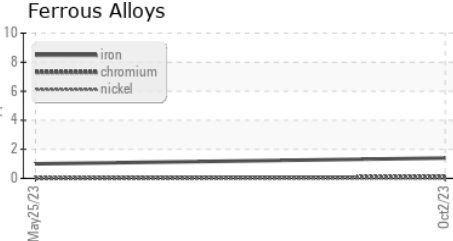

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RH0001914 **Received** : 04 Oct 2023
Lab Number : **05968926** **Diagnosed** : 11 Oct 2023
Unique Number : 10675477 **Diagnostician** : Doug Bogart
Test Package : MOB 2 (Additional Tests: PQ)

RIVERSIDE HYDRAULICS
 11027 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: PATRICK SOHNLY
 psohnly@riversidehydraulics.com
 T: (804)545-6700
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)