




OIL ANALYSIS REPORT

Sample Rating Trend

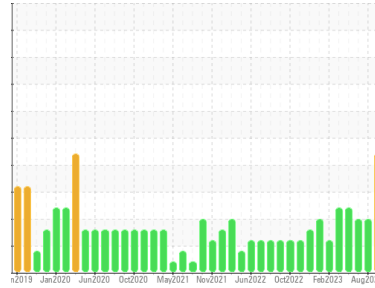

ISO



Machine Id CYLINDER BENCH

Component
Hydraulic System
Fluid

AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	RH0001915	RH0001882	RH0001664
Sample Date	Client Info	03 Oct 2023	03 Aug 2023	08 Jun 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		SEVERE	ABNORMAL	ABNORMAL

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	3	5	1
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >10	0	0	<1
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >10	3	<1	0
Lead	ppm	ASTM D5185m >10	<1	0	0
Copper	ppm	ASTM D5185m >75	1	2	<1
Tin	ppm	ASTM D5185m >10	0	0	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 5	3	4	4
Barium	ppm	ASTM D5185m 5	<1	11	19
Molybdenum	ppm	ASTM D5185m 5	2	2	2
Manganese	ppm	ASTM D5185m	0	<1	<1
Magnesium	ppm	ASTM D5185m 25	14	19	15
Calcium	ppm	ASTM D5185m 200	175	195	188
Phosphorus	ppm	ASTM D5185m 300	229	248	244
Zinc	ppm	ASTM D5185m 370	292	312	312
Sulfur	ppm	ASTM D5185m 2500	1506	1898	2016

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >20	4	3	3
Sodium	ppm	ASTM D5185m	9	6	4
Potassium	ppm	ASTM D5185m >20	<1	1	2





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	68474	90021	71771
Particles >6µm	ASTM D7647 >1300	11368	27900	17063
Particles >14µm	ASTM D7647 >160	240	496	756
Particles >21µm	ASTM D7647 >40	57	57	180
Particles >38µm	ASTM D7647 >10	3	1	7
Particles >71µm	ASTM D7647 >3	0	0	1
Oil Cleanliness	ISO 4406 (c) >19/17/14	23/21/15	24/22/16	23/21/17

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	0.41	0.53	0.52


OIL ANALYSIS REPORT

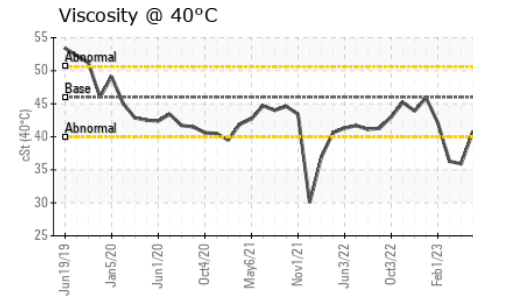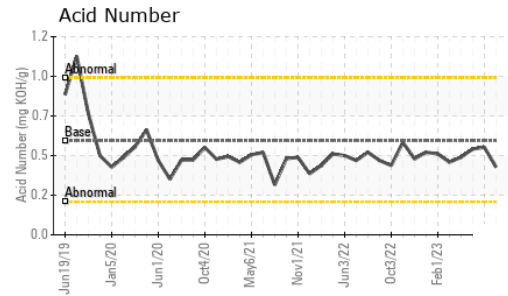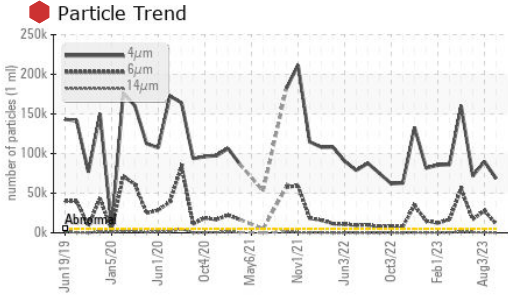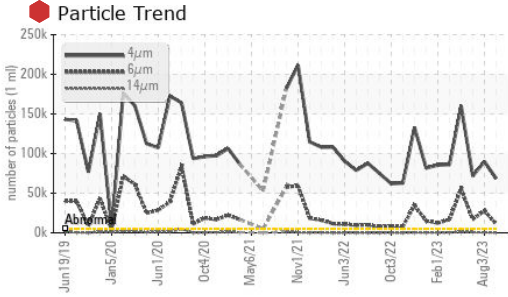






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	41.2	40.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

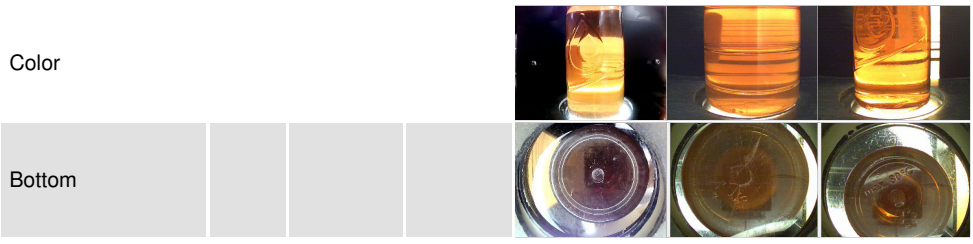

GRAPHS

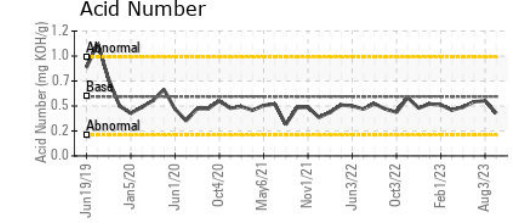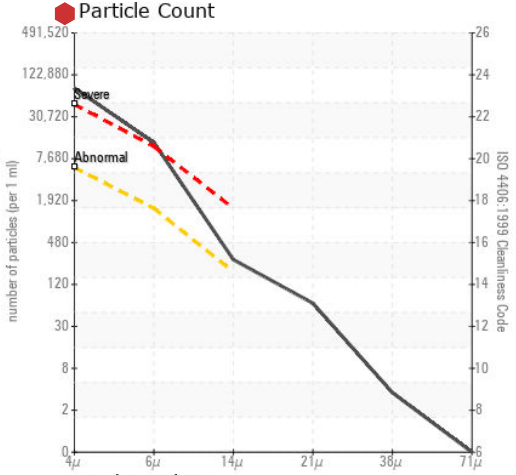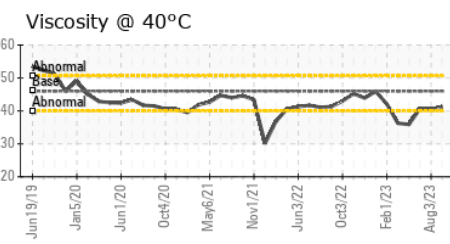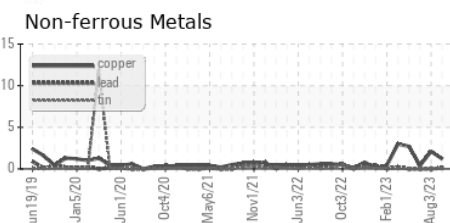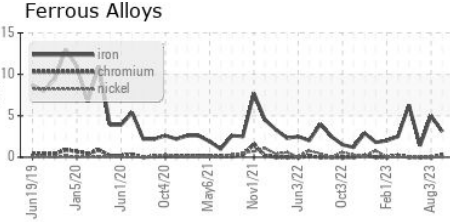

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RH0001915 **Received** : 04 Oct 2023
Lab Number : 05968927 **Diagnosed** : 05 Oct 2023
Unique Number : 10675478 **Diagnostician** : Wes Davis
Test Package : MOB 2

RIVERSIDE HYDRAULICS
 11027 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: PATRICK SOHNLY
 psohnly@riversidehydraulics.com
 T: (804)545-6700
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)